

LM3433

Common Anode Capable High Brightness LED Driver with High Frequency Dimming

General Description

The LM3433 is an adaptive constant on-time DC/DC buck (step-down) constant current controller (a true current source). The LM3433 provides a constant current for illuminating high power LEDs. The output configuration allows the anodes of multiple LEDs to be tied directly to the ground referenced chassis for maximum heat sink efficacy. The high frequency capable architecture allows the use of small external passive components and no output capacitor while maintaining low LED ripple current. Two control inputs are used to modulate LED brightness. An analog current control input is provided so the LM3433 can be adjusted to compensate for LED manufacturing variations and/or color temperature correction. The other input is a logic level PWM control of LED current. The PWM functions by shorting out the LED with a parallel switch allowing high PWM dimming frequencies. High frequency PWM dimming allows digital color temperature control, interference blanking, field sequential illumination, and brightness control. Additional features include thermal shutdown, V_{CC} under-voltage lockout, and logic level shutdown mode. The LM3433 is available in a low profile LLP-24 package.


Features

- Operating input voltage range of -9V to -14V w.r.t. LED anode
- Control inputs are referenced to the LED anode
- Output current greater than 6A
- Greater than 30kHz PWM frequency capable
- Negative output voltage capability allows LED anode to be tied directly to chassis for maximum heat sink efficacy
- No output capacitor required
- Up to 1MHz switching frequency
- Low I_Q , 1mA typical
- Soft start
- Adaptive programmable ON time allows for constant ripple current
- LLP-24 package

Applications


- LCD backlighting
- Projection systems
- Solid state lighting
- Automotive lighting

Typical Application Circuit

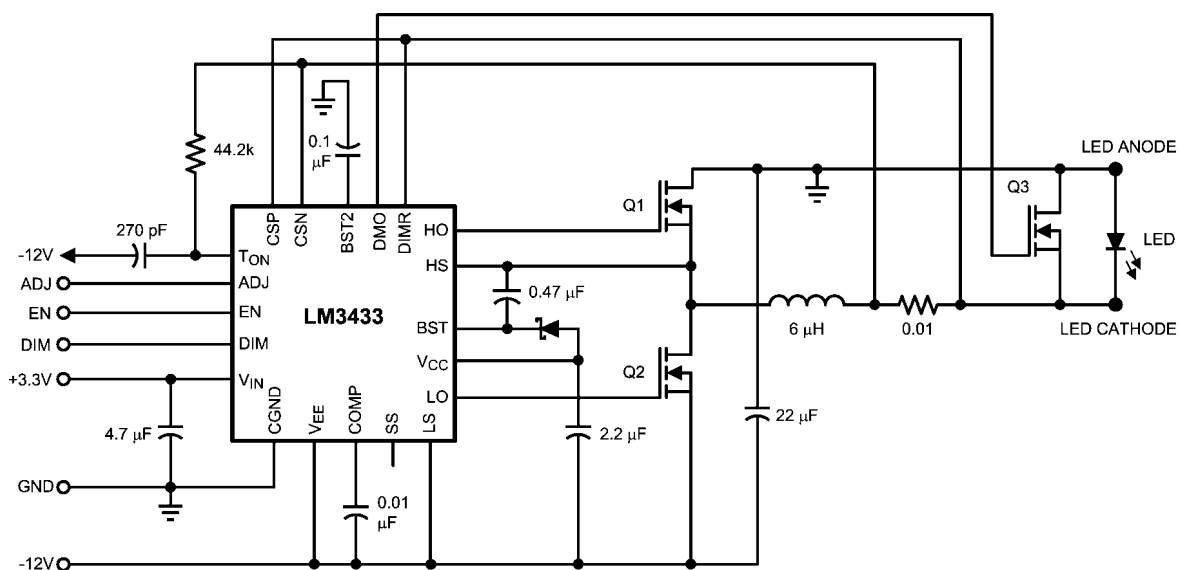

30031531

Connection Diagram

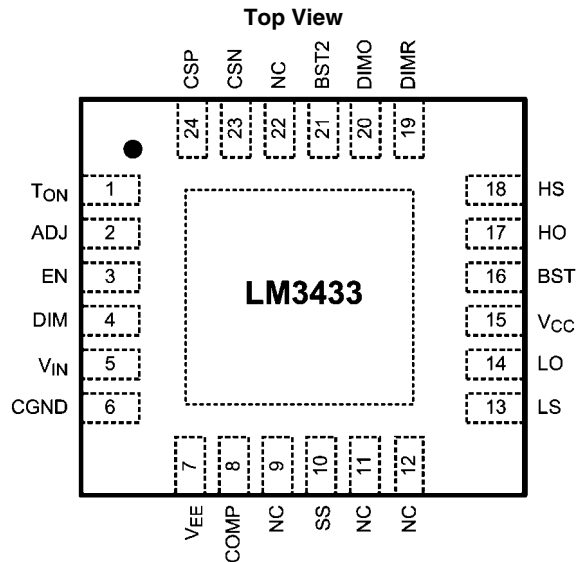

30031504

**24-Lead LLP
NS Package Number SQA24A**

Ordering Information


| Order Number | Spec. | Package Type | NSC Package Drawing | Supplied As |
|--------------|-------|--------------|---------------------|---------------------------|
| LM3433SQ | NOPB | LLP-24 | SQA24A | 1000 Units, Tape and Reel |
| LM3433SQX | NOPB | LLP-24 | SQA24A | 4500 Units, Tape and Reel |

Pin Descriptions

| Pin | Name | Function |
|-----|----------|---|
| 1 | T_{ON} | On-time programming pin. Tie an external resistor (R_{ON}) from T_{ON} to CSN, and a capacitor (C_{ON}) from T_{ON} to V_{EE} . This sets the nominal operating frequency when the LED is fully illuminated. |
| 2 | ADJ | Analog LED current adjust. Tie to V_{IN} for fixed 60mV average current sense resistor voltage. Tie to an external reference to adjust the average current sense resistor voltage (programmed output current). Refer to the " V_{SENSE} vs. ADJ Voltage" graphs in the <i>Typical Performance Characteristics</i> section and the <i>Design Procedure</i> section of the datasheet. |
| 3 | EN | Enable pin. Connect this pin to logic level HI or V_{IN} for normal operation. Connect this pin to CGND for low current shutdown. EN is internally tied to V_{IN} through a 100k resistor. |
| 4 | DIM | Logic level input for LED PWM dimming. DIM is internally tied to CGND through a 100k resistor. |
| 5 | V_{IN} | Logic power input: Connect to positive voltage between +3.0V and +5.8V w.r.t. CGND. |
| 6 | CGND | Chassis ground connection. |
| 7 | V_{EE} | Negative voltage power input: Connect to voltage between -14V to -9V w.r.t. CGND. |
| 8 | COMP | Compensation pin. Connect a capacitor between this pin and V_{EE} . |
| 9 | NC | No internal connection. Tie to V_{EE} or leave open. |
| 10 | SS | Soft Start pin. Tie a capacitor from SS to V_{EE} to reduce input current ramp rate. Leave pin open if function is not used. The SS pin is pulled to V_{EE} when the device is not enabled. |
| 11 | NC | No internal connection. Tie to V_{EE} or leave open. |
| 12 | NC | No internal connection. Tie to V_{EE} or leave open. |
| 13 | LS | Low side FET gate drive return pin. |
| 14 | LO | Low side FET gate drive output. Low in shutdown. |

| Pin | Name | Function |
|-----|----------|---|
| 15 | V_{CC} | Low side FET gate drive power bypass connection and boost diode anode connection. Tie a 2.2 μ F capacitor between V_{CC} and V_{EE} . |
| 16 | BST | High side "synchronous" FET drive bootstrap rail. |
| 17 | HO | High side "synchronous" FET gate drive output. Pulled to HS in shutdown. |
| 18 | HS | Switching node and high side "synchronous" FET gate drive return. |
| 19 | DIMR | LED dimming FET gate drive return. Tie to LED cathode. |
| 20 | DIMO | LED dimming FET gate drive output. DIMO is a driver that switches between DIMR and BST2. |
| 21 | BST2 | DIMO high side drive supply pin. Tie a 0.1 μ F between BST2 and CGND. |
| 22 | NC | No internal connection. Tie to V_{EE} or leave open. |
| 23 | CSN | Current sense amplifier inverting input. Connect to current sense resistor negative terminal. |
| 24 | CSP | Current sense amplifier non-inverting input. Connect to current sense resistor positive terminal. |
| EP | V_{EE} | Exposed Pad on the underside of the device. Connect this pad to a PC board plane connected to V_{EE} . |

Block Diagram

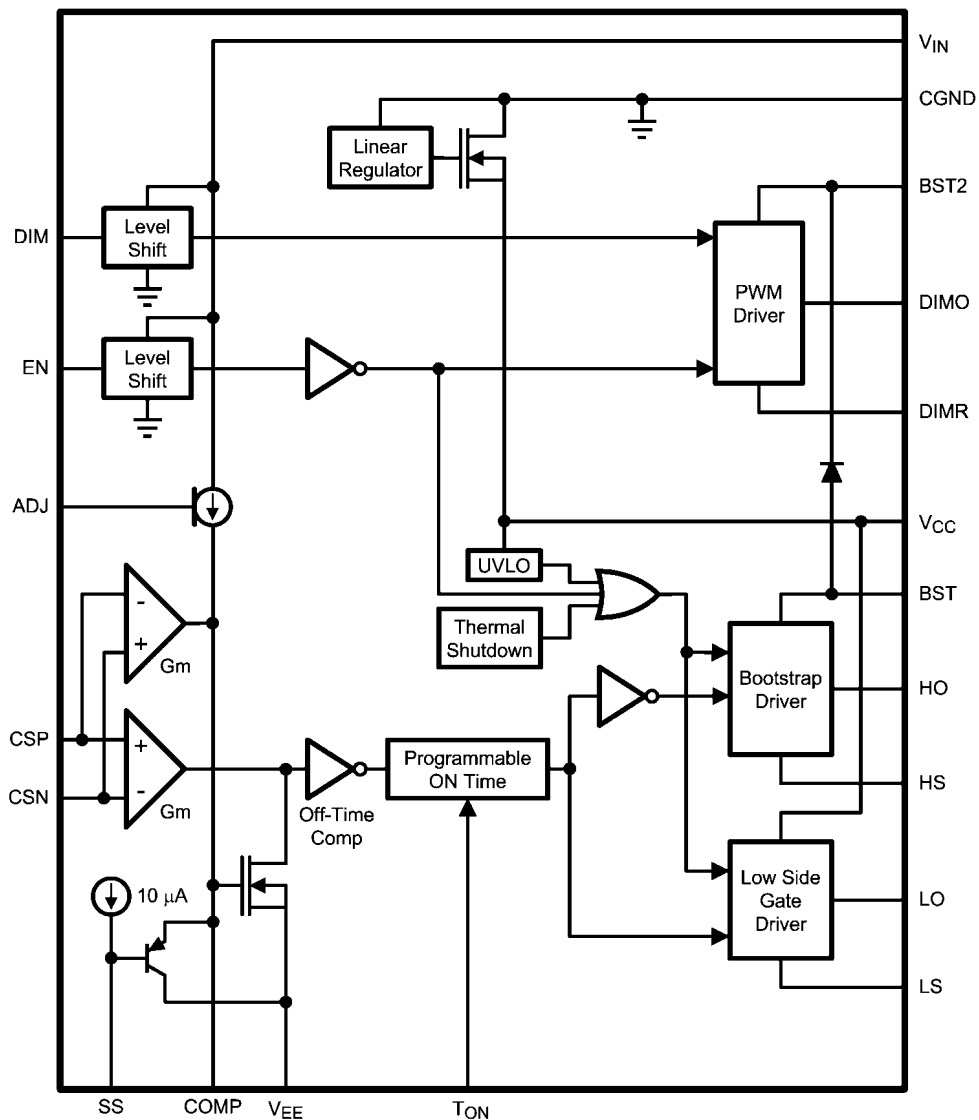

30031503

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

| | |
|---|---------------------------|
| V_{IN} , EN, DIM, ADJ to CGND | -0.3V to +7V |
| COMP, SS to V_{EE} | -0.3V to +7V |
| BST to HS | -0.3V to +7V |
| V_{CC} to V_{EE} | -0.3V to +7.5V |
| CGND, DIMR, CSP, CSN, T_{ON} to V_{EE} | -0.3V to +16V |
| HS to V_{EE} (Note 2) | -0.3V to +16V |
| LS to V_{EE} | -0.3V to +0.3V |
| HO output | HS-0.3V to BST+0.3V |
| DIMO to DIMR | -0.3V to +7V |
| LO output | LS-0.3V to V_{CC} +0.3V |
| BST2 to V_{EE} | -0.3V to 22.0V |
| Maximum Junction Temperature | 150°C |

Power Dissipation(Note 3)

Internally Limited

ESD Susceptibility

(Note 4)

| | |
|---------------------|------|
| Human Body Model | 2kV |
| Machine Model | 200V |
| Charge Device Model | 1kV |

Operating Conditions

| | |
|---|-----------------|
| Operating Junction Temperature Range (Note 5) | -40°C to +125°C |
| Storage Temperature | -65°C to +150°C |
| Input Voltage V_{IN} w.r.t. CGND | 3.0V to 5.8V |
| Input Voltage V_{EE} w.r.t. CGND | -9V to -14V |
| ADJ Input Voltage Range to CGND | 0V to V_{IN} |
| CSP, CSN Common Mode Range With Respect to CGND | -6V to 0V |

Electrical Characteristics

Specifications in standard type face are for $T_J = 25^\circ\text{C}$ and those with **boldface type** apply over the full **Operating Temperature Range** ($T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$). Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at $T_J = +25^\circ\text{C}$, and are provided for reference purposes only. Unless otherwise stated the following conditions apply: $V_{EE} = -12.0\text{V}$ and $V_{IN} = +3.3\text{V}$ with respect to CGND.

| Symbol | Parameter | Conditions | Min(Note 5) | Typ(Note 6) | Max(Note 5) | Units |
|--|---|--|-------------|-------------|-------------|---------------|
| SUPPLY CURRENT | | | | | | |
| $I_{IN}V_{EE}$ | V_{EE} Quiescent Current | EN = CGND | | 3 | 19 | μA |
| | | EN = V_{IN} , Not Switching | | 1.0 | | mA |
| $I_{IN}V_{IN}$ | V_{IN} Quiescent Current | EN = V_{IN} , Not Switching | | 300 | | μA |
| | | EN = CGND | | 35 | 71 | |
| OUTPUT CURRENT CONTROL | | | | | | |
| V_{CS} | Current sense target voltage; $V_{CS} = V_{CSP} - V_{CSN}$ | $V_{ADJ} = V_{IN}$ | 57 | 60 | 63 | mV |
| G_{ADJ} | I_{ADJ} Gain = $(V_{ADJ}-CGND)/$ $(V_{CNP}-V_{CSN})$ | $V_{IN} = 3.3\text{V}$, $V_{ADJ} = 0.5\text{V}$ or 1.5V w.r.t. CGND | 15 | 16.67 | 18 | V/V |
| I_{CSN} | Isense Input Current | $V_{ADJ} = 1\text{V}$ w.r.t. CGND | | -50 | | μA |
| | | $V_{ADJ} = V_{IN}$ | | 10 | | |
| I_{CSP} | Isense Input Current | $V_{ADJ} = V_{IN}$ | | 60 | | μA |
| | | $V_{ADJ} = 1\text{V}$ w.r.t. CGND | | 1 | | |
| G_m | CS to COMP Transconductance; $G_m =$ $I_{COMP} / (V_{CSP} - V_{CSN} - V_{ADJ}/$ 16.67) | | 0.6 | 1.3 | 2.2 | mS |
| ON TIME CONTROL | | | | | | |
| T_{ONTH} | On time threshold | $V_{T_{ON}} - V_{EE}$ at terminate ON time event | 230 | 287 | 334 | mV |
| GATE DRIVE AND INTERNAL REGULATOR | | | | | | |
| V_{CCOUT} | V_{CC} output regulation w.r.t. V_{EE} | $I_{CC} = 0\text{mA}$ to 20mA | 6.3 | 6.75 | 7.1 | V |
| V_{CCILIM} | V_{CC} current limit | $V_{CC} = V_{EE}$ | 33 | 53 | | mA |
| R_{OLH} | HO output low resistance | $I = 50\text{mA}$ source | | 2 | | Ω |
| R_{OHH} | HO output high resistance | $I = 50\text{mA}$ sink | | 3 | | |
| R_{OLL} | LO output low resistance | $I = 50\text{mA}$ source | | 2 | | Ω |
| R_{OHL} | LO output high resistance | $I = 50\text{mA}$ sink | | 3 | | |

| Symbol | Parameter | Conditions | Min(Note 5) | Typ(Note 6) | Max(Note 5) | Units |
|-------------------------------|---|-----------------------------------|-------------|-------------|-------------|-------|
| R _{OLP} | DIMO output low resistance | I = 5mA source | | 20 | | Ω |
| R _{OHP} | DIMO output high resistance | I = 5mA sink | | 30 | | |
| FUNCTIONAL CONTROL | | | | | | |
| V _{INUVLO} | V _{IN} undervoltage lockout | With respect to CGND | | 1.4 | | V |
| V _{CCUVLO} | V _{CC} - V _{EE} undervoltage lockout thresholds | On Threshold | 6.0 | 6.6 | 7.0 | V |
| | | Off threshold | 4.9 | 5.4 | 5.8 | |
| V _{EN} | Enable threshold, with respect to CGND | Device on w.r.t. CGND | | | 1.6 | V |
| | | Device off w.r.t. CGND | 0.6 | | | |
| R _{EN} | Enable pin pullup resistor | | | 100 | | kΩ |
| V _{DIM} | DIM logic input threshold | DIM rising threshold w.r.t. CGND | | | 1.6 | V |
| | | DIM falling threshold w.r.t. CGND | 0.6 | | | |
| R _{DIM} | DIM pin pulldown resistor | | | 100 | | kΩ |
| I _{ADJ} | ADJ pin current | | -1.0 | | 1.0 | μA |
| I _{SS} | SS pin source current | | | 10 | | μA |
| R _{SS} | SS pin pulldown resistance | EN = CGND | | 1.0 | | kΩ |
| AC SPECIFICATIONS | | | | | | |
| T _{DTD} | LO and HO dead time | LO falling to HO rising dead time | | 26 | | ns |
| | | HO falling to LO rising dead time | | 28 | | |
| T _{PDIM} | DIM to DIMO propagation delay | DIM rising to DIMO rising delay | | 68 | 124 | ns |
| | | DIM falling to DIMO falling delay | | 58 | 160 | |
| THERMAL SPECIFICATIONS | | | | | | |
| T _{JLIM} | Junction temperature thermal limit | | | 175 | | °C |
| T _{JLIM(hyst)} | Thermal limit hysteresis | | | 20 | | °C |
| θ _{JA} | LLP-24 package thermal resistance | JEDEC 4 layer board | | 39 | | °C/W |

Note 1: Absolute maximum ratings are limits beyond which damage to the device may occur. Operating Ratings are conditions for which the device is intended to be functional, but device parameter specifications may not be guaranteed. For guaranteed specifications and test conditions, see the Electrical Characteristics.

Note 2: The HS pin can go to -6V with respect to V_{EE} for 30ns and +22V with respect to V_{EE} for 50ns without sustaining damage.

Note 3: The maximum allowable power dissipation is a function of the maximum junction temperature, T_{J(MAX)}, the junction-to-ambient thermal resistance, θ_{JA}, and the ambient temperature, T_A. The maximum allowable power dissipation at any ambient temperature is calculated using: P_D (MAX) = (T_{J(MAX)} - T_A) / θ_{JA}. Exceeding the maximum allowable power dissipation will cause excessive die temperature, and the regulator will go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage. Thermal shutdown engages at T_J=175°C (typ.) and disengages at T_J=155°C (typ).


Note 4: Human Body Model, applicable std. JESD22-A114-C. Machine Model, applicable std. JESD22-A115-A. Field Induced Charge Device Model, applicable std. JESD22-C101-C.

Note 5: All limits guaranteed at room temperature (standard typeface) and at temperature extremes (bold typeface). All room temperature limits are 100% production tested. All limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods. All limits are used to calculate Average Outgoing Quality Level (AOQL).

Note 6: Typical numbers are at 25°C and represent the most likely norm.


Typical Performance Characteristics

Efficiency vs. LED Forward Voltage
($V_{CGND}-V_{EE} = 9V$)

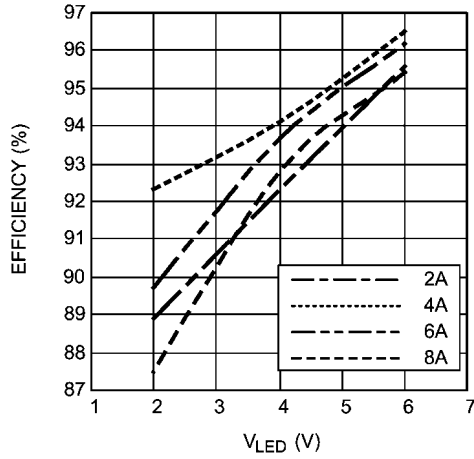


30031523

Efficiency vs. LED Forward Voltage
($V_{CGND}-V_{EE} = 12V$)

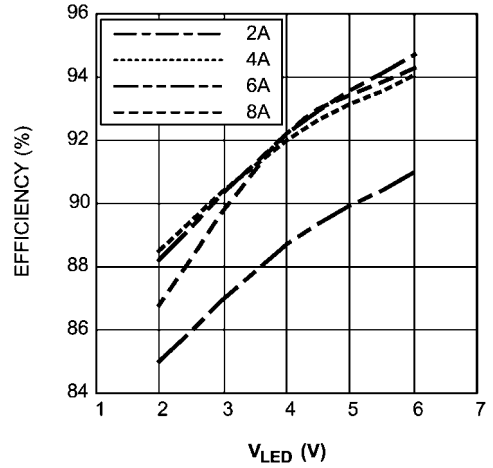


30031522

Efficiency vs. LED Forward Voltage
($V_{CGND}-V_{EE} = 14V$)

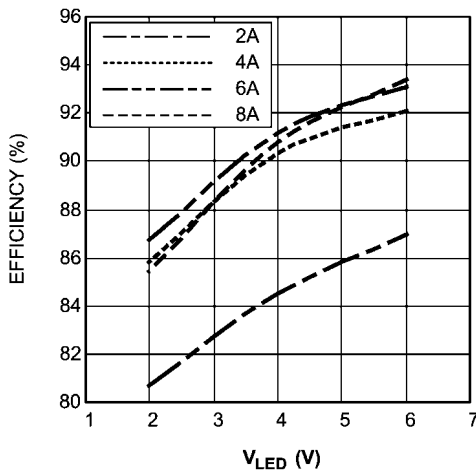


30031521

V_{SENSE} vs. V_{ADJ}
($V_{IN} = 3.3V$)

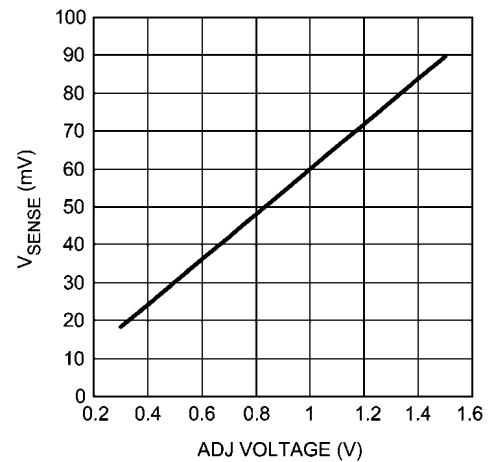


30031518

V_{SENSE} vs. V_{ADJ}
($V_{IN} = 5.0V$)

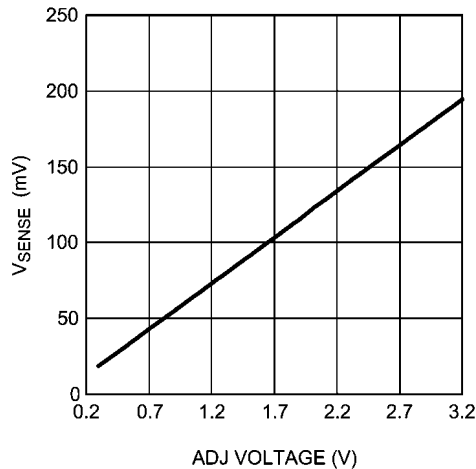


30031519


V_{SENSE} vs. Temperature
($ADJ = V_{IN}$)

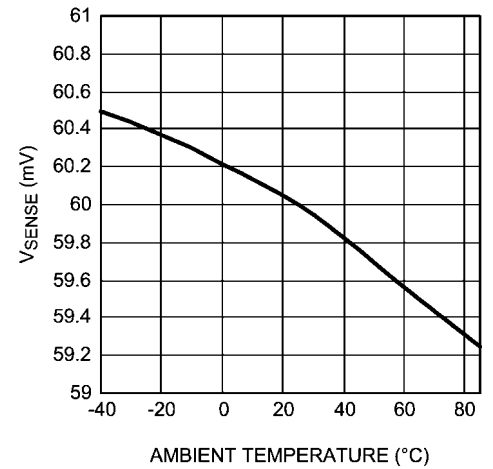

30031524

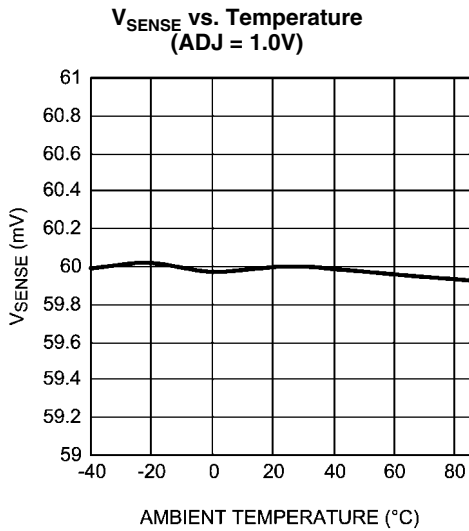


30031525

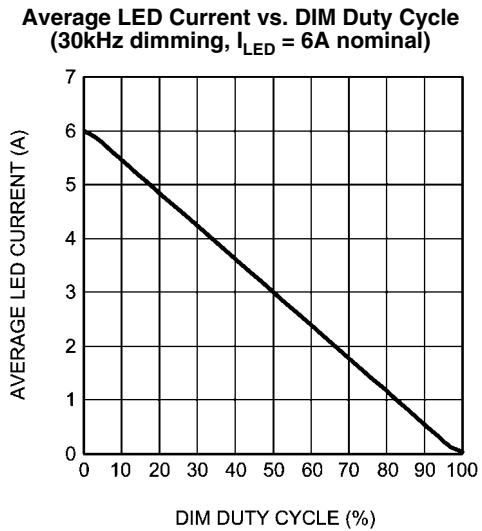

30031520


Startup Waveform

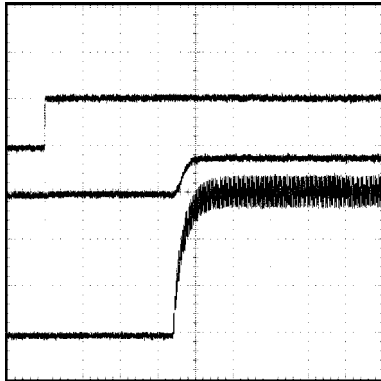

30031567

I_{LED} = 6A nominal, V_{IN} = 3.3V, V_{EE} = -12V, V_{LED} = 3V, SS = open
 Top trace: EN input, 2V/div, DC
 Middle trace: V_{EE} input current, 2A/div, DC
 Bottom trace: I_{LED}, 2A/div, DC
 T = 100µs/div


Shutdown Waveform

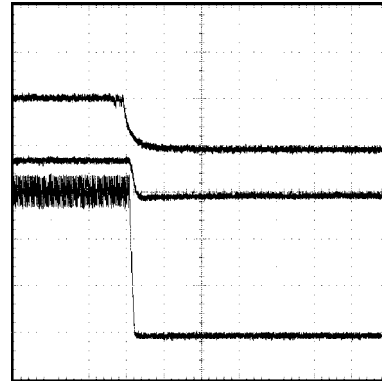

30031568

I_{LED} = 6A nominal, V_{IN} = 3.3V, V_{EE} = -12V, V_{LED} = 3V, SS = open
 Top trace: EN input, 2V/div, DC
 Middle trace: V_{EE} input current, 2A/div, DC
 Bottom trace: I_{LED}, 2A/div, DC
 T = 100µs/div

30kHz PWM Dimming Waveform Showing Inductor Ripple Current

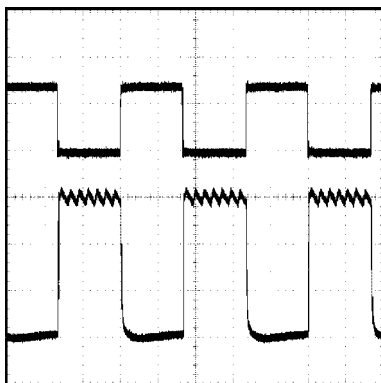

30031566

I_{LED} = 6A nominal, V_{IN} = 3.3V, V_{EE} = -12V
 Top trace: DIM input, 2V/div, DC
 Bottom trace: I_{LED}, 2A/div, DC
 T = 10µs/div

Operation

CURRENT REGULATOR OPERATION

The LM3433 is a controller for a Continuous Conduction Buck Converter. Because of its buck topology and operation in the continuous mode, the output current is very well controlled. It only varies within a switching frequency cycle by the inductor ripple current. This ripple current is normally set at 10% of the DC current. Setting the ripple current lower than 10% is a useful tradeoff of inductor size for less LED light output ripple. Additional circuitry can be added to achieve any LED light ripple desired.

The LED current is set by the voltage across a sense resistor. This sense voltage is nominally 60mV but can be programmed higher or lower by an external control voltage.

The running frequency of the converter is programmed by an external RC network in conjunction with the LED's forward voltage. The frequency is nominally set around 200kHz to 500kHz. Fast PWM control is available by shorting the output of the current source by a MOSFET in parallel with the LED. During the LED OFF time the running frequency is determined by the RC network and the parasitic resistance of the output circuit including the DIM FET R_{DSON} .

The LM3433 system has been evaluated to be a very accurate, high compliance current source. This is manifest in its high output impedance and accurate current control. The current is measured to vary less than 6mA out of 6A when transitioning from LED OFF (output shorted) to LED ON (output ~6V).

PROTECTION

The LM3433 has dedicated protection circuitry running during normal operation. The thermal shutdown circuitry turns off all power devices when the die temperature reaches excessive levels. The V_{CC} undervoltage lockout (UVLO) comparator protects the power devices during power supply startup and shutdown to prevent operation at voltages less than the minimum operating input voltage. The V_{CC} pin is short circuit protected to V_{EE} . The LM3433 also features a shutdown mode which decreases the supply current to approximately 35 μ A.

The ADJ, EN, and DIM pins are capable of sustaining up to +/-2mA. If the voltages on these pins will exceed either V_{IN} or CGND by necessity or by a potential fault, an external resistor is recommended for protection. Size this resistor to limit pin current to under 2mA. A 10k resistor should be sufficient. This resistor may be used in any application for added protection without any impact on function or performance.

DESIGN PROCEDURE

This section presents guidelines for selecting external components.

SETTING LED CURRENT CONTROL

LM3433 uses average current mode control to regulate the current delivered to the LED (I_{LED}). An external current sense resistor (R_{SENSE}) in series with the LED is used to convert I_{LED} into a voltage that is sensed by the LM3433 at the CSP and CSN pins. CSP and CSN are the inputs to an error amplifier with a programmed input offset voltage (V_{SENSE}). V_{SENSE} is used to regulate I_{LED} based on the following equation:

$$I_{LED} = V_{SENSE}/R_{SENSE}$$

FIXED LED CURRENT

The ADJ pin sets V_{SENSE} . Tie ADJ to V_{IN} to use a fixed 60mV internal reference for V_{SENSE} . Select R_{SENSE} to fix the LED current based on the following equation:

$$R_{SENSE} = 60mV/I_{LED}$$

ADJUSTABLE LED CURRENT

When tied to an external voltage the ADJ pin sets V_{SENSE} based on the following equation:

$$V_{SENSE} = (V_{ADJ} - V_{CGND})/16.667$$

When the reference on ADJ is adjustable, V_{SENSE} and I_{LED} can be adjusted within the linear range of the ADJ pin. This range has the following limitations:

$$0.3V < V_{ADJ} < (\text{The greater of } 1.5V \text{ or } (V_{IN} - 1.9V))$$

When V_{ADJ} is less than this linear range the V_{SENSE} is guaranteed by design to be less than or equal to 0.3V/16.667. When V_{ADJ} is greater than this linear range and less than $V_{IN} - 1V$, V_{SENSE} is guaranteed by design to be less than or equal to $V_{ADJ}/16.667$. If V_{ADJ} is greater than $V_{IN} - 1V$, V_{SENSE} switches to 60mV.

INPUT CAPACITOR SELECTION

A low ESR ceramic capacitor is needed to bypass the MOSFETs. This capacitor is connected between the drain of the synchronous FET (CGND) and the source of the main switch (V_{EE}). This capacitor prevents large voltage transients from appearing at the V_{EE} pin of the LM3433. Use a 22 μ F value minimum with X5R or X7R dielectric. In addition to the FET bypass capacitors, additional bypass capacitors should be placed near the V_{EE} and V_{IN} pins and should be returned to CGND.

The input capacitor must also be sized to handle the dimming frequency input ripple when the DIM function is used. This ripple may be as high as 85% of the nominal DC input current (at 50% duty cycle). When dimming this input capacitor should be selected to handle the input ripple current.

RECOMMENDED OPERATING FREQUENCY AND ON TIME "TIME_{ON}" CALCULATION

Although the switching frequency can be set over a wide range, the following equation describes the recommended frequency selection given inexpensive magnetic materials available today:

$$f = \frac{A}{\sqrt{I_{LED}}} \text{ (MHz)}$$

In the above equation $A=1.2$ for powdered iron core inductors and $A=0.9$ or less for ferrite core inductors. This difference takes into account the fact that ferrite cores generally become more lossy at higher frequencies. Given the switching frequency f calculated above, $TIME_{ON}$ can be calculated. If V_{LED} is the forward voltage drop of the LED that is being driven, $TIME_{ON}$ can be calculated with the following equation:

$$TIME_{ON} = \frac{V_{LED}}{f|V_{EE}|}$$

TIMING COMPONENTS (R_{ON} and C_{ON})

Using the calculated value for $TIME_{ON}$, the timing components R_{ON} and C_{ON} can be selected. C_{ON} should be large enough to dominate the parasitic capacitance of the T_{ON} pin. A good C_{ON} value for most applications is 1nF. Based on calculated $TIME_{ON}$, C_{ON} , and the nominal V_{EE} and V_{LED} voltages, R_{ON} can be calculated based on the following equation:

$$R_{ON} = \frac{TIME_{ON}}{C_{ON}(0.3/(|V_{EE}| - V_{LED}))}$$

INDUCTOR SELECTION

The most critical inductor parameters are inductance, current rating, and DC resistance. To calculate the inductance, use the desired peak to peak LED ripple current (I_{RIPPLE}), R_{ON} , and C_{ON} . A reasonable value for I_{RIPPLE} is 10% of I_{LED} . The inductor value is calculated using the following equation:

$$L = \frac{0.3 \times R_{ON} \times C_{ON}}{I_{RIPPLE}}$$

For all V_{LED} and V_{EE} voltages, I_{RIPPLE} remains constant and is only dependent on the passive external components R_{ON} , C_{ON} , and L .

The I^2R loss caused by the DC resistance of the inductor is an important parameter affecting the efficiency. Lower DC resistance inductors are larger. A good tradeoff point between the efficiency and the core size is letting the inductor I^2R loss equal 1% to 2% of the output power. The inductor should have a current rating greater than the peak current for the application. The peak current is I_{LED} plus 1/2 I_{RIPPLE} .

POWER FET SELECTION

FETs should be chosen so that the I^2R_{DSON} loss is less than 1% of the total output power. Analysis shows best efficiency with around $8m\Omega$ of R_{DSON} and 15nC of gate charge for a 6A application. All of the switching loss is in the main switch FET. An additional important parameter for the synchronous FET is reverse recovery charge (Q_{RR}). High Q_{RR} adversely affects the transient voltages seen by the IC. A low Q_{RR} FET should be used.

DIM FET SELECTION

Choose a DIM FET with the lowest R_{DSON} for maximum efficiency and low input current draw during the DIM cycle. The output voltage during DIM will determine the switching frequency. A lower output voltage results in a lower switching frequency. If the lower frequency during DIM must be bound, choose a FET with a higher R_{DSON} to force the switching frequency higher during the DIM cycle.

BOOTSTRAP CAPACITORS

The LM3433 uses two bootstrap capacitors and a bypass capacitor on V_{CC} to generate the voltages needed to drive the external FETs. A 2.2 μ F ceramic capacitor or larger is recommended between the V_{CC} and LS pins. A 0.47 μ F is recommended between the HS and BST pins. A 0.1 μ F is recommended between BST2 and CGND.

SOFT-START CAPACITOR

The LM3433 integrates circuitry that, when used in conjunction with the SS pin, will slow the current ramp on start-up. The SS pin is used to tailor the soft-start for a specific application. A capacitor value of 0.1 μ F on the SS pin will yield a 12mS soft start time. For most applications soft start is not needed.

ENABLE OPERATION

The EN pin of the LM3433 is designed so that it may be controlled using a 1.6V or higher logic signal. If the enable function is not used, the EN pin may be tied to V_{IN} or left open. This pin is pulled to V_{IN} internally through a 100k pull up resistor.


PWM DIM OPERATION

The DIM pin of the LM3433 is designed so that it may be controlled using a 1.6V or higher logic signal. The PWM frequency easily accommodates more than 40kHz dimming and can be much faster if needed. If the PWM DIM pin is not used, tie it to CGND or leave it open. The DIM pin is tied to CGND internally through a 100k pull down resistor.

LAYOUT CONSIDERATIONS


The LM3433 is a high performance current driver so attention to layout details is critical to obtain maximum performance. The most important PCB board design consideration is minimizing the loop comprised by the main FET, synchronous FET, and their associated decoupling capacitor(s). Place the V_{CC} bypass capacitor as near as possible to the LM3433. Place the PWM dimming/shunt FET as close to the LED as possible. A ground plane should be used for power distribution to the power FETs. Use a star ground between the LM3433 circuitry, the synchronous FET, and the decoupling capacitor(s). The EP contact on the underside of the package must be connected to V_{EE} . The two lines connecting the sense resistor to CSN and CSP must be routed as a differential pair directly from the resistor. A Kelvin connection is recommended. It is good practice to route the DIMO/DIMR, HS/HO, and LO/LS lines as differential pairs. The most important PCB board design consideration is minimizing the loop comprised by the main FET, synchronous FET, and their associated decoupling capacitor(s). Optimally this loop should be orthogonal to the ground plane.

Application Information

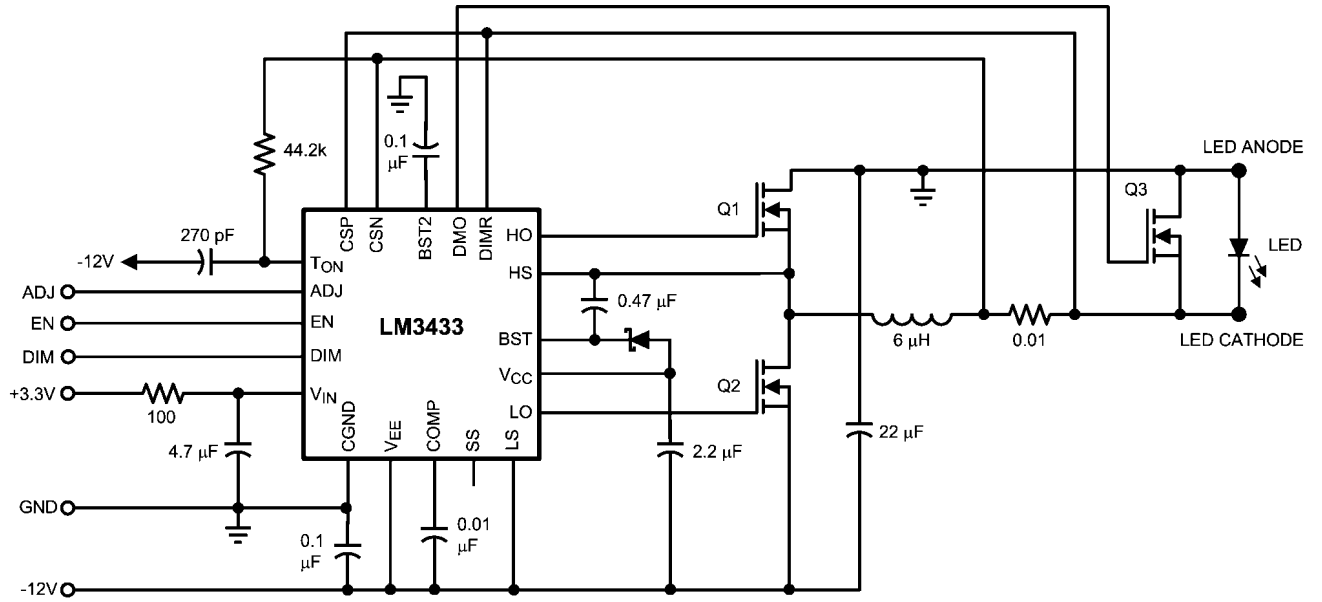

30031516

FIGURE 1. 2A to 6A Output Application Circuit

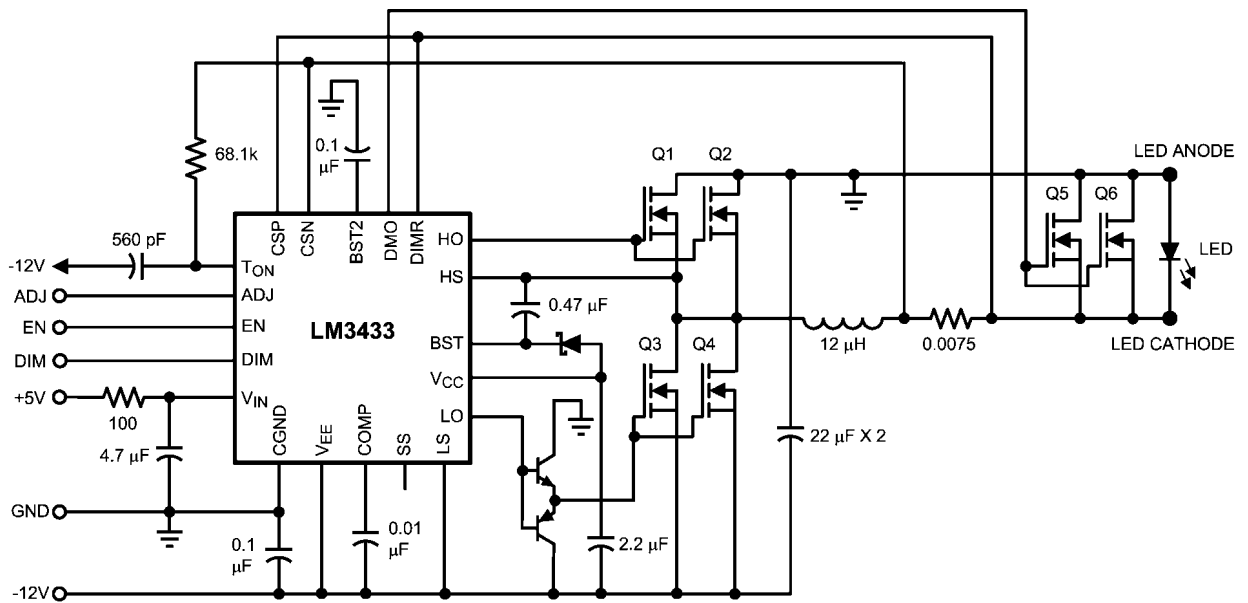

30031517

FIGURE 2. 2A to 14A Output Application Circuit

Some Recommended Inductors (Others May Be Used)

| Manufacturer | Inductor | Contact Information |
|---------------------|------------------------------|-----------------------------------|
| Coilcraft | GA3252-AL and SER1360 series | www.coilcraft.com 800-322-2645 |
| Coiltronics | HCLP2 series | www.coiltronics.com |
| Pulse | PB2020 series | www.pulseeng.com |


Some Recommended Input/Bypass Capacitors (Others May Be Used)

| Manufacturer | Capacitor | Contact Information |
|---------------------|---|---------------------------------|
| Vishay Sprague | 293D, 592D, and 595D series tantalum | www.vishay.com 407-324-4140 |
| Taiyo Yuden | High capacitance MLCC ceramic | www.t-yuden.com 408-573-4150 |
| Cornell Dubilier | ESRD series Polymer Aluminum Electrolytic SPV and AFK series V-chip series | www.cde.com |
| MuRata | High capacitance MLCC ceramic | www.murata.com |

Some Recommended MOSFETs (Others May Be Used)

| Manufacturer | Inductor | Contact Information |
|---------------------|---|--|
| Siliconix | Si7386DP (Main FET, DIM FET) Si7668ADP (Synchronous FET) | www.vishay.com/company/brands/ siliconix/ |
| ON Semiconductor | NTMFS4841NHT1G (Main FET, Synchronous FET, DIM FET) | www.onsemi.com |

Physical Dimensions inches (millimeters) unless otherwise noted

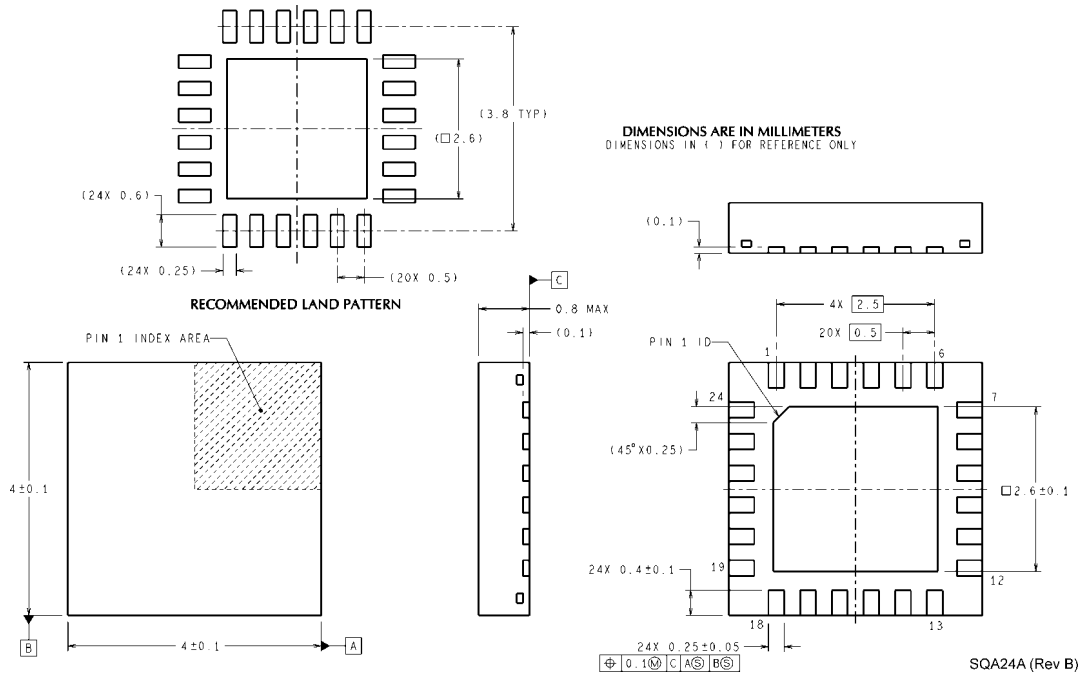

Notes

LM3433

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

| Products | | Design Support | |
|--------------------------------|--|-------------------------|--|
| Amplifiers | www.national.com/amplifiers | WEBENCH | www.national.com/webench |
| Audio | www.national.com/audio | Analog University | www.national.com/AU |
| Clock Conditioners | www.national.com/timing | App Notes | www.national.com/appnotes |
| Data Converters | www.national.com/adc | Distributors | www.national.com/contacts |
| Displays | www.national.com/displays | Green Compliance | www.national.com/quality/green |
| Ethernet | www.national.com/ethernet | Packaging | www.national.com/packaging |
| Interface | www.national.com/interface | Quality and Reliability | www.national.com/quality |
| LVDS | www.national.com/lvds | Reference Designs | www.national.com/refdesigns |
| Power Management | www.national.com/power | Feedback | www.national.com/feedback |
| Switching Regulators | www.national.com/switchers | | |
| LDOs | www.national.com/ldo | | |
| LED Lighting | www.national.com/led | | |
| PowerWise | www.national.com/powerwise | | |
| Serial Digital Interface (SDI) | www.national.com/sdi | | |
| Temperature Sensors | www.national.com/tempsensors | | |
| Wireless (PLL/VCO) | www.national.com/wireless | | |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2008 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email:
new.feedback@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com
German Tel: +49 (0) 180 5010 771
English Tel: +44 (0) 870 850 4288

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com