TENSILITY

part number: C description: C 5

: CA-2193 Cable, 1830 mm, 3.5x1.35x9.5 mm, 50-00116 dc plug to stripped tinned, 24 AWG, 30-00003 wire

date: August 31, 2011 rev: A2 page: 1 of 2


Specifications:

connector description (1)	dc plug, 3.5x1.35xL22 mm, brass nickel plated, P/N 50-00116
overmold (2)	30P, PVC, black
wire description (3)	2C, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 65P, P/N 30-00003
cable outer diameter	Ø3.6 mm
cable color	black
cable length	1830 +76/-25 mm
rating	500 mA, 36 Vdc
twist tie (4)	black

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Mechanical drawing:

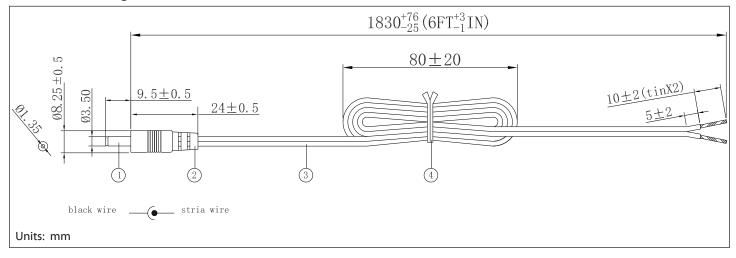

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings

Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial

Date

TENSILITYpart number:
description:CA-2193
Cable, 18

Cable, 1830 mm, 3.5x1.35x9.5 mm, 50-00116 dc plug to stripped tinned, 24 AWG, 30-00003 wire

Revision notes:		
Date	Description	
January 19, 2009	Re-issued; original specification issued by CUI, re-issued by Tensility without any material or mechanical changes.	
January 19, 2011	added overmold dimensions, updated description	
August 31, 2011	updated description, connector, and wire information	
	Date January 19, 2009 January 19, 2011	

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title
Name	Date
Company	Branch