

## Automotive fully integrated H-bridge motor driver


### Features

Type	R <sub>DS(on)</sub>	I <sub>out</sub>	V <sub>ccmax</sub>
VNH3ASP30-E	42mΩ max (per leg)	30A	41V

- 5V logic level compatible inputs
- Undervoltage and overvoltage shutdown
- Overvoltage clamp
- Thermal shut down
- Cross-conduction protection
- Linear current limiter
- Very low standby power consumption
- PWM operation up to 20 kHz
- Protection against loss of ground and loss of V<sub>CC</sub>
- Current-sense output proportional to motor current
- Package: ECOPACK®

### Description

The VNH3ASP30-E is a full-bridge motor driver intended for a wide range of automotive applications. The device incorporates a dual monolithic high-side driver (HSD) and two low-side switches. The HSD switch is designed using STMicroelectronics proprietary VIPower™ M0 technology that efficiently integrates a true Power MOSFET with an intelligent signal/protection circuit on the same die.

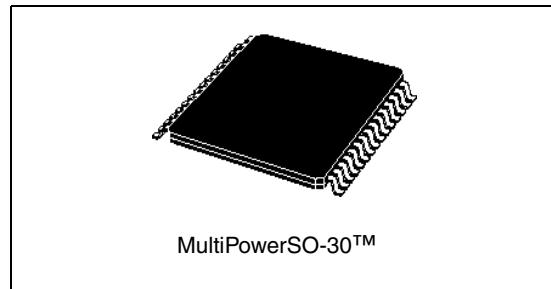

MultiPowerSO-30™

The low-side switches are vertical MOSFETs manufactured using STMicroelectronics proprietary EHD ("STripFET™") process. The three circuits are assembled in a MultiPowerSO-30 package on electrically isolated lead frames. This package, specifically designed for the harsh automotive environment, offers improved thermal performance thanks to exposed die pads. Moreover, its fully symmetrical mechanical design provides superior manufacturability at board level. The input signals IN<sub>A</sub> and IN<sub>B</sub> can directly interface with the microcontroller to select the motor direction and the brake condition. Pins DIAG<sub>A</sub>/EN<sub>A</sub> or DIAG<sub>B</sub>/EN<sub>B</sub>, when connected to an external pull-up resistor, enable one leg of the bridge. They also provide a feedback digital diagnostic signal. The normal condition operation is explained in [Table 12: Truth table in normal operating conditions on page 14](#). The CS pin monitors the motor current by delivering a current proportional to its value. The speed of the motor can be controlled in all possible conditions by the PWM up to 20 kHz. In all cases, a low level state on the PWM pin will turn off both the LS<sub>A</sub> and LS<sub>B</sub> switches. When PWM rises to a high level, LS<sub>A</sub> or LS<sub>B</sub> turn on again depending on the input pin state.

**Table 1. Device summary**

Package	Order codes	
	Tube	Tape & reel
MultiPowerSO-30	VNH3ASP30-E	VNH3ASP30TR-E

## Contents

<b>1</b>	<b>Block diagram and pin description</b>	<b>5</b>
<b>2</b>	<b>Electrical specifications</b>	<b>8</b>
2.1	Absolute maximum ratings	8
2.2	Electrical characteristics	9
2.3	Electrical characteristics curves	16
<b>3</b>	<b>Application information</b>	<b>20</b>
3.1	Reverse battery protection	21
<b>4</b>	<b>Package and PCB thermal data</b>	<b>25</b>
4.1	MultiPowerSO-30 thermal data	25
4.1.1	Thermal calculation in clockwise and anti-clockwise operation in Steady-state mode	26
4.1.2	Thermal resistances definition (values according to the PCB heatsink area)	26
4.1.3	Thermal calculation in Transient mode	26
4.1.4	Single pulse thermal impedance definition (values according to the PCB heatsink area)	26
<b>5</b>	<b>Package and packing information</b>	<b>29</b>
5.1	ECOPACK® packages	29
5.2	MultiPowerSO-30 package mechanical data	29
5.3	Packing information	31
<b>6</b>	<b>Revision history</b>	<b>32</b>

## List of tables


Table 1.	Device summary . . . . .	1
Table 2.	Block description . . . . .	5
Table 3.	Pin definitions and functions . . . . .	6
Table 4.	Pin functions description . . . . .	7
Table 5.	Absolute maximum ratings . . . . .	8
Table 6.	Power section . . . . .	9
Table 7.	Logic inputs (INA, INB, ENA, ENB) . . . . .	9
Table 8.	PWM . . . . .	9
Table 9.	Switching ( $V_{CC} = 13V$ , $R_{LOAD} = 1 \Omega$ ) . . . . .	10
Table 10.	Protection and diagnostic . . . . .	10
Table 11.	Current sense ( $9V < V_{CC} < 16V$ ) . . . . .	10
Table 12.	Truth table in normal operating conditions . . . . .	14
Table 13.	Truth table in fault conditions (detected on OUTA) . . . . .	14
Table 14.	Electrical transient requirements . . . . .	15
Table 15.	Thermal calculation in clockwise and anti-clockwise operation in Steady-state mode . . . . .	26
Table 16.	Thermal parameters . . . . .	28
Table 17.	MultiPowerSO-30 mechanical data . . . . .	29
Table 18.	Document revision history . . . . .	32

## List of figures

Figure 1.	Block diagram . . . . .	5
Figure 2.	Configuration diagram (top view) . . . . .	6
Figure 3.	Current and voltage conventions . . . . .	8
Figure 4.	Definition of the delay times measurement . . . . .	11
Figure 5.	Definition of the low-side switching times . . . . .	12
Figure 6.	Definition of the high-side switching times . . . . .	12
Figure 7.	Definition of dynamic cross conduction current during a PWM operation. . . . .	13
Figure 8.	On state supply current. . . . .	16
Figure 9.	Off state supply current. . . . .	16
Figure 10.	High-level input current. . . . .	16
Figure 11.	Input clamp voltage. . . . .	16
Figure 12.	Input high-level voltage. . . . .	16
Figure 13.	Input low-level voltage . . . . .	16
Figure 14.	Input hysteresis voltage . . . . .	17
Figure 15.	High-level enable pin current . . . . .	17
Figure 16.	Delay time during change of operation mode . . . . .	17
Figure 17.	Enable clamp voltage . . . . .	17
Figure 18.	High-level enable voltage . . . . .	17
Figure 19.	Low-level enable voltage . . . . .	17
Figure 20.	PWM high-level voltage . . . . .	18
Figure 21.	PWM low-level voltage . . . . .	18
Figure 22.	PWM high-level current . . . . .	18
Figure 23.	Ovovoltage shutdown . . . . .	18
Figure 24.	Undervoltage shutdown . . . . .	18
Figure 25.	Current limitation. . . . .	18
Figure 26.	On state high-side resistance vs Tcase . . . . .	19
Figure 27.	On state low-side resistance vs Tcase . . . . .	19
Figure 28.	On state high-side resistance vs VCC . . . . .	19
Figure 29.	On state low-side resistance vs VCC . . . . .	19
Figure 30.	Output voltage rise time . . . . .	19
Figure 31.	Output voltage fall time . . . . .	19
Figure 32.	Typical application circuit for DC to 20 kHz PWM operation short circuit protection . . . . .	20
Figure 33.	Half-bridge configuration . . . . .	21
Figure 34.	Multi-motors configuration . . . . .	22
Figure 35.	Waveforms in full-bridge operation . . . . .	23
Figure 36.	Waveforms in full-bridge operation (continued ) . . . . .	24
Figure 37.	MultiPowerSO-30™ PC board . . . . .	25
Figure 38.	Chipset configuration . . . . .	25
Figure 39.	Auto and mutual RthJA vs PCB copper area in open box free air condition. . . . .	25
Figure 40.	MultiPowerSO-30 HSD thermal impedance junction ambient single pulse . . . . .	27
Figure 41.	MultiPowerSO-30 LSD thermal impedance junction ambient single pulse. . . . .	27
Figure 42.	Thermal fitting model of an H-bridge in MultiPowerSO-30 . . . . .	28
Figure 43.	MultiPowerSO-30 package outline . . . . .	29
Figure 44.	MultiPowerSO-30 suggested pad layout . . . . .	30
Figure 45.	MultiPowerSO-30 tube shipment (no suffix) . . . . .	31
Figure 46.	MultiPowerSO-30 tape and reel shipment (suffix "TR") . . . . .	31


# 1 Block diagram and pin description

**Figure 1. Block diagram**

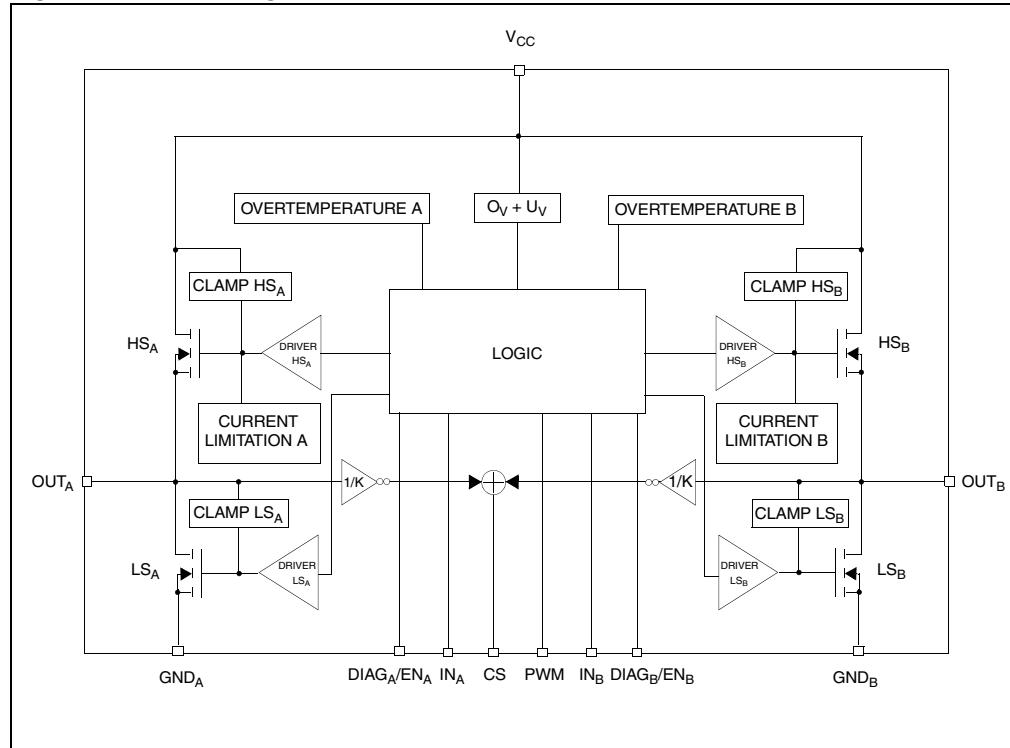

**Table 2. Block description**

Name	Description
Logic control	Allows the turn-on and the turn-off of the high-side and the low-side switches according to the truth table
Overvoltage + undervoltage	Shuts down the device outside the range [5.5V..16V] for the battery voltage
High-side and low-side clamp voltage	Protect the high-side and the low-side switches from the high voltage on the battery line in all configurations for the motor
High-side and low-side driver	Drives the gate of the concerned switch to allow a good $R_{DS(on)}$ for the leg of the bridge
Linear current limiter	Limits the motor current by reducing the high-side switch gate source voltage when short-circuit to ground occurs
Overtemperature protection	In case of short-circuit with the increase of the junction's temperature, shuts down the concerned high side to prevent its degradation and to protect the die
Fault detection	Signals an abnormal behavior of the switches in the half-bridge A or B by pulling low the concerned EN <sub>x</sub> /DIAG <sub>x</sub> pin

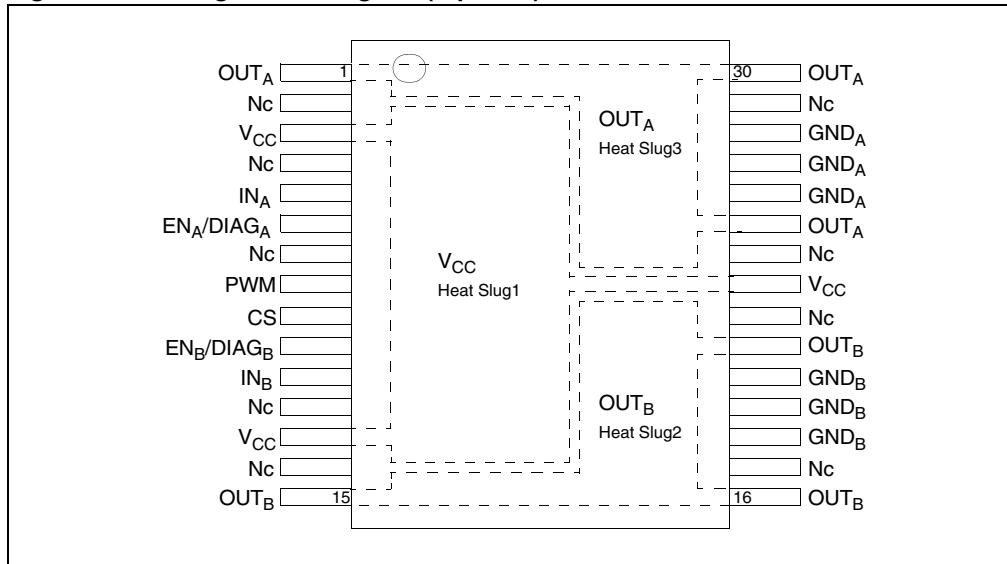**Figure 2. Configuration diagram (top view)****Table 3. Pin definitions and functions**

Pin No.	Symbol	Function
1, 25, 30	OUT <sub>A</sub> , Heat Slug3	Source of high-side switch A / Drain of low-side switch A
2, 4, 7, 12, 14, 17, 22, 24, 29	NC	Not connected
3, 13, 23	V <sub>CC</sub> , Heat Slug1	Drain of high-side switches and power supply voltage
5	IN <sub>A</sub>	Clockwise input
6	EN <sub>A</sub> /DIAG <sub>A</sub>	Status of high-side and low-side switches A; open drain output
8	PWM	PWM input
9	CS	Output of current sense
10	EN <sub>B</sub> /DIAG <sub>B</sub>	Status of high-side and low-side switches B; open drain output
11	IN <sub>B</sub>	Counter clockwise input
15, 16, 21	OUT <sub>B</sub> , Heat Slug2	Source of high-side switch B / Drain of low-side switch B
26, 27, 28	GND <sub>A</sub>	Source of low-side switch A <sup>(1)</sup>
18, 19, 20	GND <sub>B</sub>	Source of low-side switch B <sup>(1)</sup>


1. GND<sub>A</sub> and GND<sub>B</sub> must be externally connected together.

**Table 4. Pin functions description**

Name	Description
$V_{CC}$	Battery connection
$GND_A$ , $GND_B$	Power grounds; must always be externally connected together
$OUT_A$ , $OUT_B$	Power connections to the motor
$IN_A$ , $IN_B$	Voltage controlled input pins with hysteresis, CMOS compatible: These two pins control the state of the bridge in normal operation according to the truth table (brake to $V_{CC}$ , brake to GND, clockwise and counterclockwise).
PWM	Voltage controlled input pin with hysteresis, CMOS compatible: Gates of low-side FETs are modulated by the PWM signal during their ON phase allowing speed control of the motor.
$EN_A/DIAG_A$ , $EN_B/DIAG_B$	Open drain bidirectional logic pins. These pins must be connected to an external pull up resistor. When externally pulled low, they disable half-bridge A or B. In case of fault detection (thermal shutdown of a high-side FET or excessive ON state voltage drop across a low-side FET), these pins are pulled low by the device (see truth table in fault condition).
CS	Analog current-sense output. This output sources a current proportional to the motor current. The information can be read back as an analog voltage across an external resistor.

## 2 Electrical specifications

**Figure 3. Current and voltage conventions**

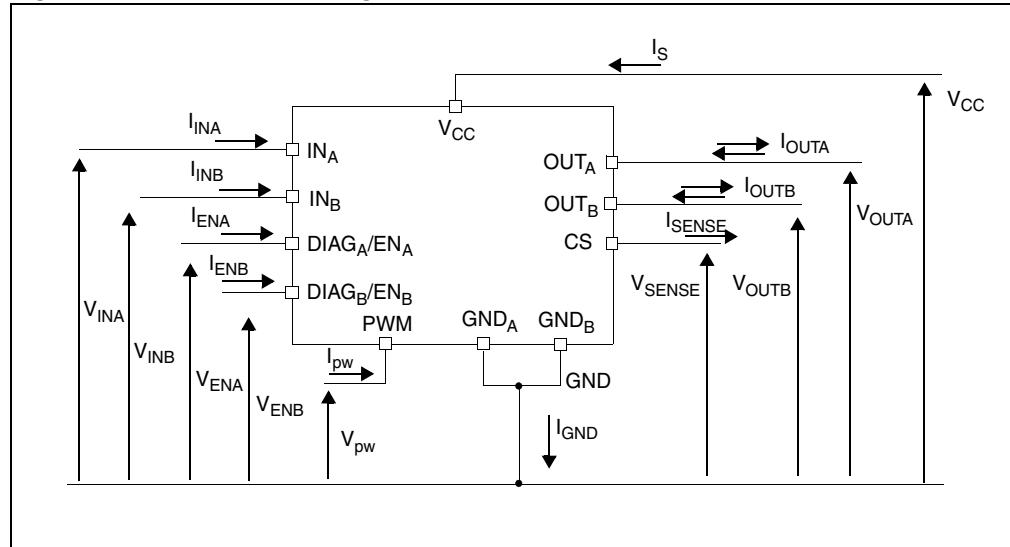

### 2.1 Absolute maximum ratings

**Table 5. Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{CC}$	Supply voltage	+41	V
$I_{max}$	Maximum output current (continuous)	30	A
$I_R$	Reverse output current (continuous)	-30	
$I_{IN}$	Input current (IN <sub>A</sub> and IN <sub>B</sub> pins)	$\pm 10$	mA
$I_{EN}$	Enable input current (DIAG <sub>A</sub> /EN <sub>A</sub> and DIAG <sub>B</sub> /EN <sub>B</sub> pins)	$\pm 10$	
$I_{PW}$	PWM input current	$\pm 10$	
$V_{CS}$	Current-sense maximum voltage	-3/+15	V
$V_{ESD}$	Electrostatic discharge (R = 1.5kΩ C = 100pF)		
	– CS pin	2	kV
	– logic pins	4	kV
	– output pins: OUT <sub>A</sub> , OUT <sub>B</sub> , V <sub>CC</sub>	5	kV
$T_J$	Junction operating temperature	Internally limited	
$T_C$	Case operating temperature	-40 to 150	°C
$T_{stg}$	Storage temperature	-55 to 150	

## 2.2 Electrical characteristics

$V_{CC} = 9V$  up to 16 V;  $-40^{\circ}C < T_J < 150^{\circ}C$ , unless otherwise specified.

**Table 6. Power section**

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{CC}$	Operating supply voltage		5.5		16	V
$I_S$	Supply current	Off state: $IN_A = IN_B = PWM = 0$ ; $T_J = 25^{\circ}C$ ; $V_{CC} = 13V$		12	30	$\mu A$
		$IN_A = IN_B = PWM = 0$ ;		60		$\mu A$
$R_{ONHS}$	Static high-side resistance	$I_{OUT} = 12A$ ; $T_J = 25^{\circ}C$ $I_{OUT} = 12A$ ; $T_J = -40$ to $150^{\circ}C$			30	$m\Omega$
	Static low-side resistance	$I_{OUT} = 12A$ ; $T_J = 25^{\circ}C$ $I_{OUT} = 12A$ ; $T_J = -40$ to $150^{\circ}C$			60	$m\Omega$
$V_f$	High-side freewheeling diode forward voltage	$I_f = 12A$		0.8	1.1	V
$I_{L(off)}$	High-side off-state output current (per channel)	$T_J = 25^{\circ}C$ ; $V_{OUTX} = EN_X = 0V$ ; $V_{CC} = 13V$			3	$\mu A$
		$T_J = 125^{\circ}C$ ; $V_{OUTX} = EN_X = 0V$ ; $V_{CC} = 13V$			5	
$I_{RM}$	Dynamic cross-conduction current	$I_{OUT} = 12A$ (see <i>Figure 7</i> )		1.7		A

**Table 7. Logic inputs ( $IN_A$ ,  $IN_B$ ,  $EN_A$ ,  $EN_B$ )**

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{IL}$	Input low-level voltage	Normal operation ( $DIAG_X/EN_X$ pin acts as an input pin)			1.25	V
$V_{IH}$	Input high-level voltage		3.25			
$V_{Ihys}$	Input hysteresis voltage		0.5			
$V_{ICL}$	Input clamp voltage	$I_{IN} = 1mA$	5.5	6.3	7.5	
		$I_{IN} = -1mA$	-1.0	-0.7	-0.3	
$I_{INL}$	Input low current	$V_{IN} = 1.25V$	1			$\mu A$
$I_{INH}$	Input high current	$V_{IN} = 3.25V$			10	
$V_{DIAG}$	Enable output low-level voltage	Fault operation ( $DIAG_X/EN_X$ pin acts as an output pin); $I_{EN} = 1mA$			0.4	V

**Table 8. PWM**

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{PWL}$	PWM low-level voltage				1.25	V
$I_{PWL}$	PWM low-level pin current	$V_{pw} = 1.25 \text{ V}$	1			$\mu\text{A}$
$V_{PWH}$	PWM high-level voltage		3.25			V
$I_{PWH}$	PWM high-level pin current	$V_{pw} = 3.25 \text{ V}$			10	$\mu\text{A}$
$V_{PW\text{hys}}$	PWM hysteresis voltage		0.5			V
$V_{PW\text{CL}}$	PWM clamp voltage	$I_{pw} = 1\text{mA}$	$V_{CC} + 0.3$	$V_{CC} + 0.7$	$V_{CC} + 1.0$	
		$I_{pw} = -1\text{mA}$	-6.0	-4.5	-3.0	
$C_{IN\text{PW}}$	PWM pin input capacitance	$V_{IN} = 2.5\text{V}$			25	pF

**Table 9. Switching ( $V_{CC} = 13\text{V}$ ,  $R_{LOAD} = 1 \Omega$ )**

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$f_{PW}$	PWM frequency		0		20	kHz
$t_{d(on)}$	Turn-on delay time	Input rise time < 1 $\mu\text{s}$ (see <i>Figure 6</i> )			250	$\mu\text{s}$
$t_{d(off)}$	Turn-off delay time	Input rise time < 1 $\mu\text{s}$ (see <i>Figure 6</i> )			250	
$t_r$	Rise time	(see <i>Figure 5</i> )		1	1.6	
$t_f$	Fall time	(see <i>Figure 5</i> )		1	2.4	
$t_{DEL}$	Delay time during change of operating mode	(see <i>Figure 4</i> )	300	600	1800	
$t_{rr}$	High-side freewheeling diode reverse recovery time	(see <i>Figure 7</i> )		110		ns



**Table 10. Protection and diagnostic**



Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{UV(\text{sd})}$	Undervoltage shutdown				5.5	V
$V_{UV(\text{reset})}$	Undervoltage reset			4.7		
$V_{OV(\text{sd})}$	Oversupply shutdown		16	19	22	
$I_{LIM}$	High-side current limitation		30	50	70	A
$V_{CLP}$	Total clamp voltage ( $V_{CC}$ to GND)	$I_{OUT} = 12\text{A}$	43	48	54	V
$T_{th(\text{sd})}$	Thermal shutdown temperature	$V_{IN} = 3.25\text{V}$	150	175	200	$^{\circ}\text{C}$
$T_{h(\text{reset})}$	Thermal reset temperature		135			
$T_{th(\text{hys})}$	Thermal hysteresis		7	15		

**Table 11. Current sense (9V < V<sub>CC</sub> < 16V)**

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
K <sub>1</sub>	I <sub>OUT</sub> /I <sub>SENSE</sub>	I <sub>OUT</sub> = 30A; R <sub>SENSE</sub> = 700Ω; T <sub>J</sub> = -40 to 150°C	4000	4700	5400	
K <sub>2</sub>	I <sub>OUT</sub> /I <sub>SENSE</sub>	I <sub>OUT</sub> = 8A; R <sub>SENSE</sub> = 700Ω; T <sub>J</sub> = -40 to 150°C	3750	4700	5650	
dK <sub>1</sub> /K <sub>1</sub> <sup>(1)</sup>	Analog sense current drift	I <sub>OUT</sub> = 30A; R <sub>SENSE</sub> = 700Ω; T <sub>J</sub> = -40 to 150°C	-8		+8	%
dK <sub>2</sub> /K <sub>2</sub> <sup>(1)</sup>	Analog sense current drift	I <sub>OUT</sub> = 8A; R <sub>SENSE</sub> = 700Ω; T <sub>J</sub> = -40 to 150°C	-10		+10	
I <sub>SENSEO</sub>	Analog sense leakage current	I <sub>OUT</sub> = 0A; V <sub>SENSE</sub> = 0V; T <sub>J</sub> = -40 to 150°C	0		70	µA

1. Analog sense current drift is deviation of factor K for a given device over (-40°C to 150°C and 9V < V<sub>CC</sub> < 16V) with respect to its value measured at T<sub>J</sub> = 25°C, V<sub>CC</sub> = 13V

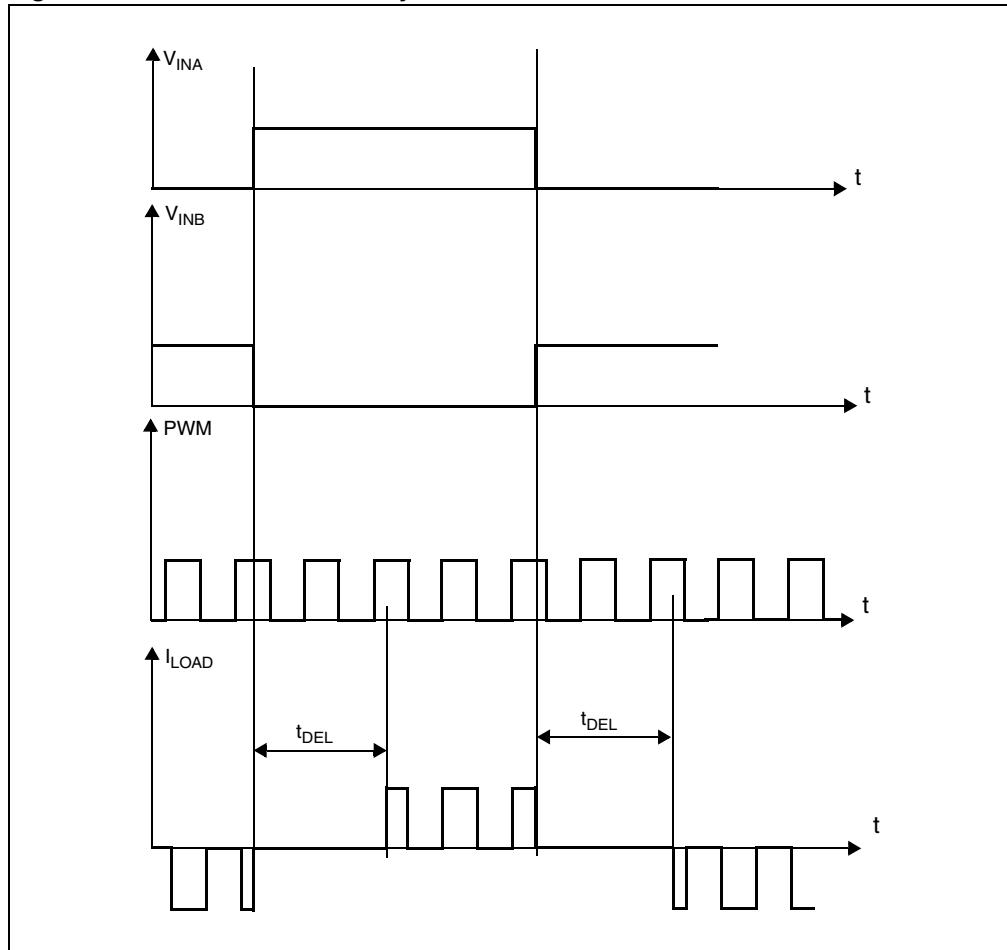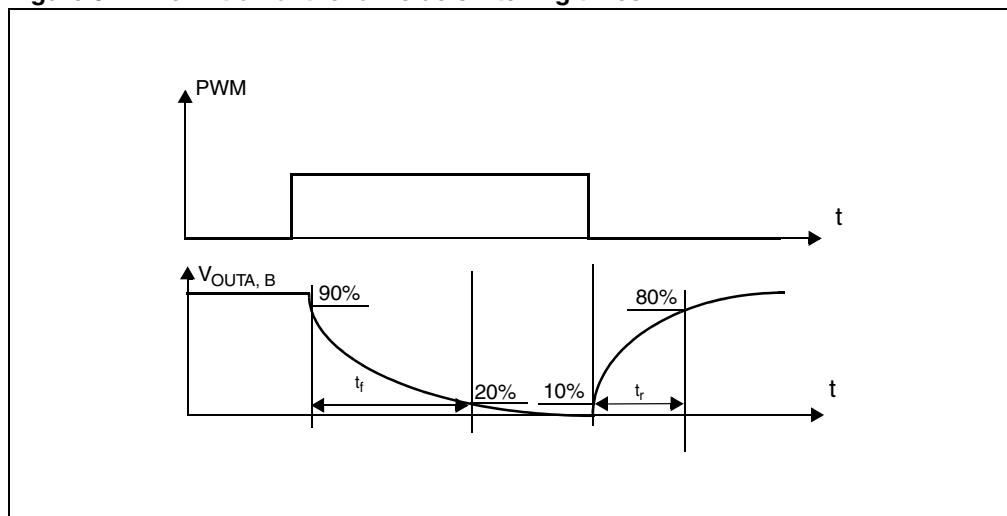**Figure 4. Definition of the delay times measurement****Figure 5. Definition of the low-side switching times**

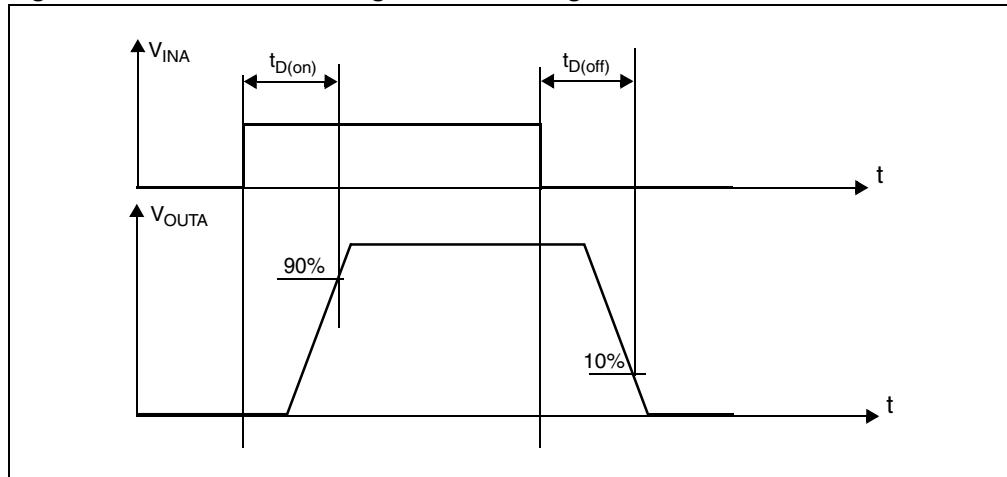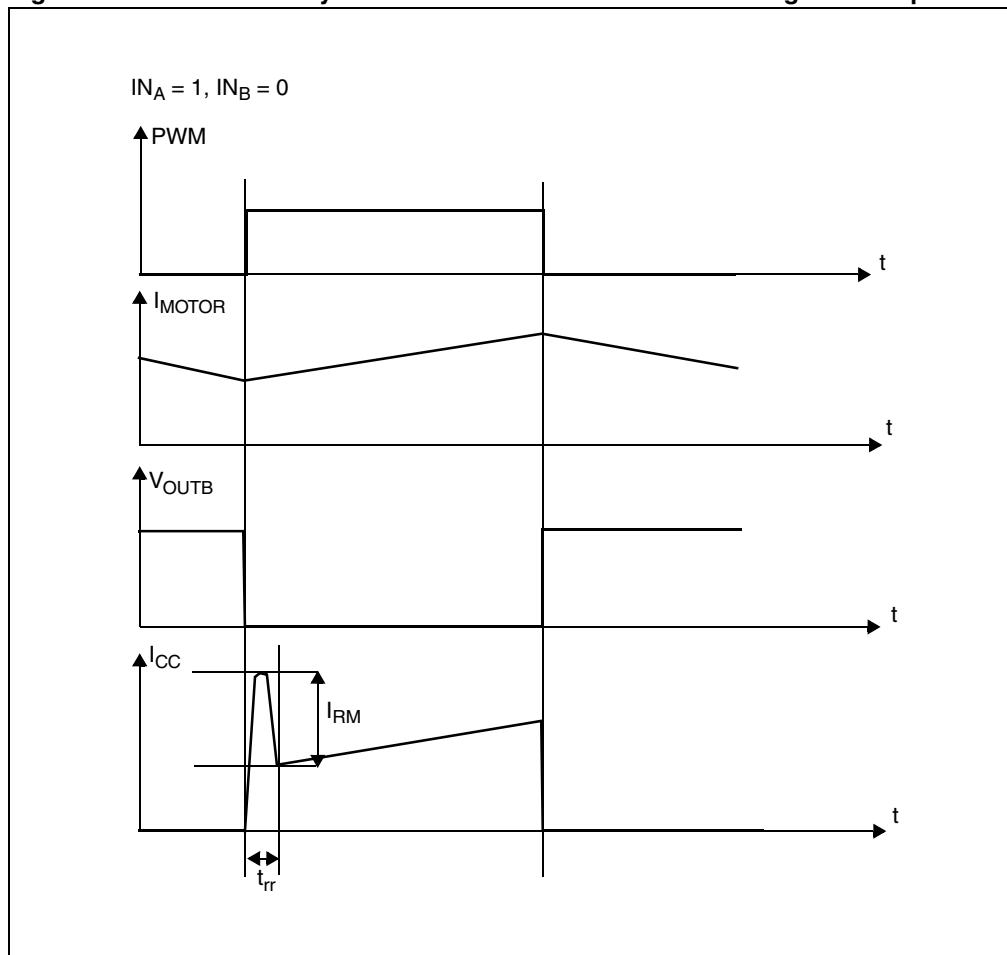**Figure 6. Definition of the high-side switching times****Figure 7. Definition of dynamic cross conduction current during a PWM operation**

**Table 12.** Truth table in normal operating conditions

IN <sub>A</sub>	IN <sub>B</sub>	DIAG <sub>A</sub> /EN <sub>A</sub>	DIAG <sub>B</sub> /EN <sub>B</sub>	OUT <sub>A</sub>	OUT <sub>B</sub>	CS	Operating mode
1	1	1	1	H	H	High Imp.	Brake to V <sub>CC</sub>
	0				L	I <sub>SENSE</sub> = I <sub>OUT</sub> /K	Clockwise (CW)
0	1			L	H	I <sub>SENSE</sub> = I <sub>OUT</sub> /K	Clockwise (CW)
	0				L	High Imp.	Brake to GND

**Table 13.** Truth table in fault conditions (detected on OUT<sub>A</sub>)

IN <sub>A</sub>	IN <sub>B</sub>	DIAG <sub>A</sub> /EN <sub>A</sub>	DIAG <sub>B</sub> /EN <sub>B</sub>	OUT <sub>A</sub>	OUT <sub>B</sub>	CS
1	1	0	1	OPEN	H	High Imp.
	0				L	
0	1				H	I <sub>OUTB</sub> /K
	0				L	High Imp.
X	X		0		OPEN	
	1				H	I <sub>OUTB</sub> /K
	0		1		L	High Imp.



**Note:** Notice that saturation detection on the low side power MOSFET is possible only if the impedance of the short-circuit from the output to the battery is less than 100mΩ when the device is supplied with a battery voltage of 13.5V.

**Table 14. Electrical transient requirements**

<b>ISO T/R - 7637/1 Test Pulse</b>	<b>Test Level I</b>	<b>Test Level II</b>	<b>Test Level III</b>	<b>Test Level IV</b>	<b>Test Levels Delays and Impedance</b>
1	-25V	-50V	-75V	-100V	2ms, 10Ω
2	+25V	+50V	+75V	+100V	0.2ms, 10Ω
3a	-25V	-50V	-100V	-150V	0.1μs, 50Ω
3b	+25V	+50V	+75V	+100V	
4	-4V	-5V	-6V	-7V	100ms, 0.01Ω
5	+26.5V	+46.5V	+66.5V	+86.5V	400ms, 2Ω

<b>ISO T/R - 7637/1 Test Pulse</b>	<b>Test Levels Result I</b>	<b>Test Levels Result II</b>	<b>Test Levels Result III</b>	<b>Test Levels Result IV</b>
1	C	C	C	C
2				
3a				
3b				
4		E	E	E
5 <sup>(1)</sup>				

1. For load dump exceeding the above value a centralized suppressor must be adopted.

<b>Class</b>	<b>Contents</b>
C	All functions of the device performed as designed after exposure to disturbance.
E	One or more functions of the device did not perform as designed after exposure to disturbance and cannot be returned to proper operation without replacing the device.

## 2.3 Electrical characteristics curves

Figure 8. On state supply current

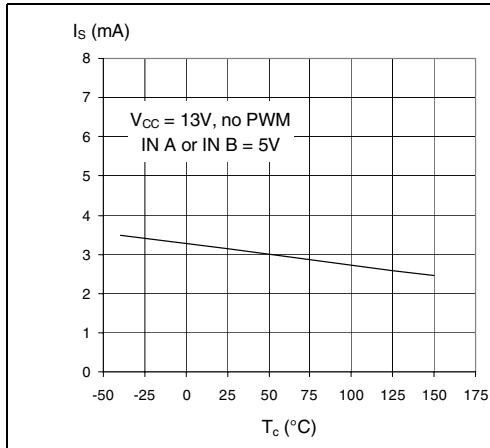


Figure 9. Off state supply current

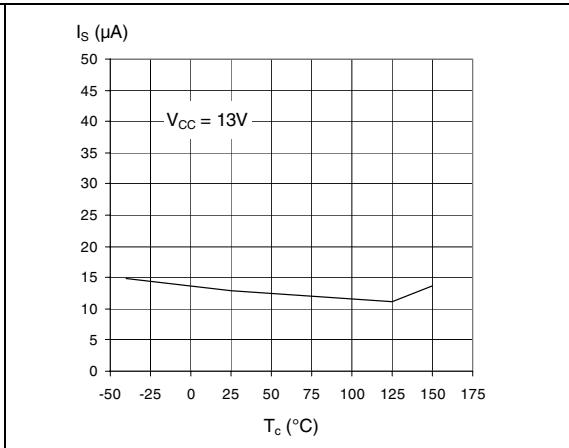


Figure 10. High-level input current

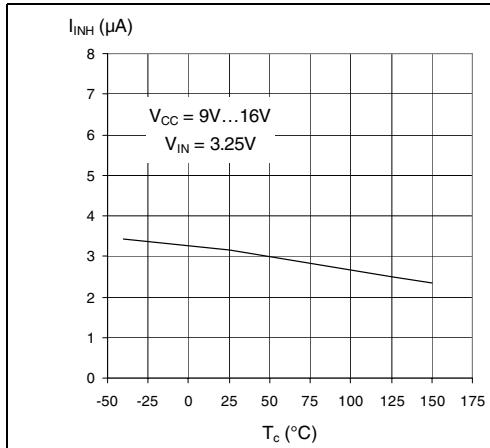


Figure 11. Input clamp voltage

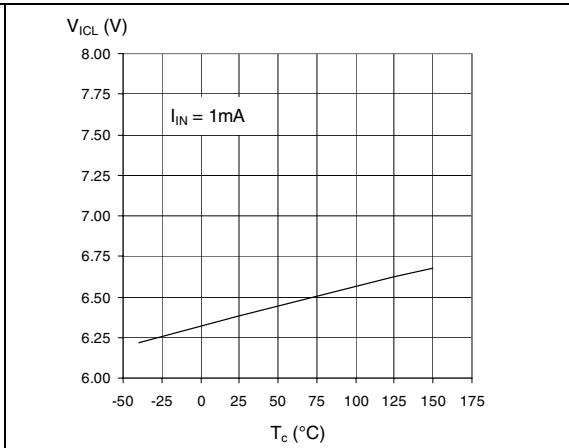


Figure 12. Input high-level voltage




















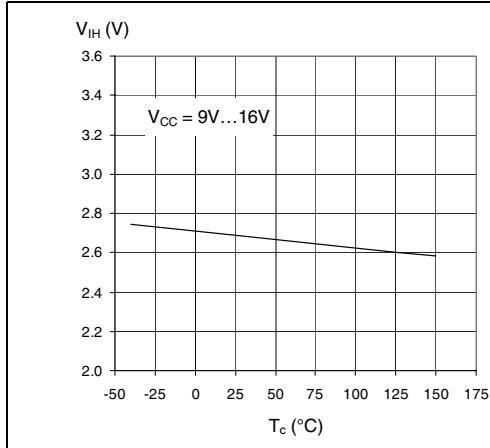


Figure 13. Input low-level voltage

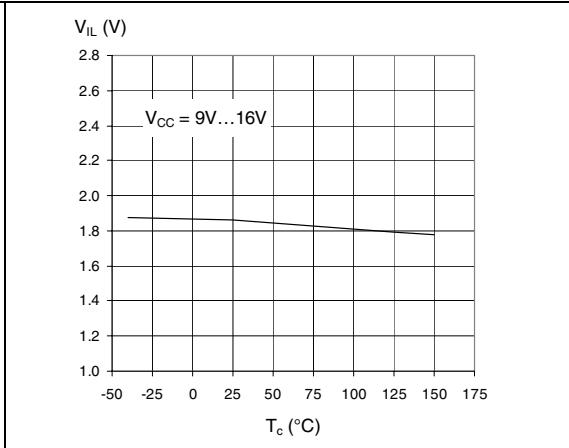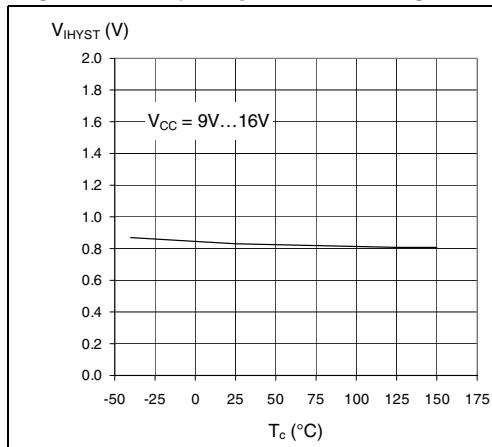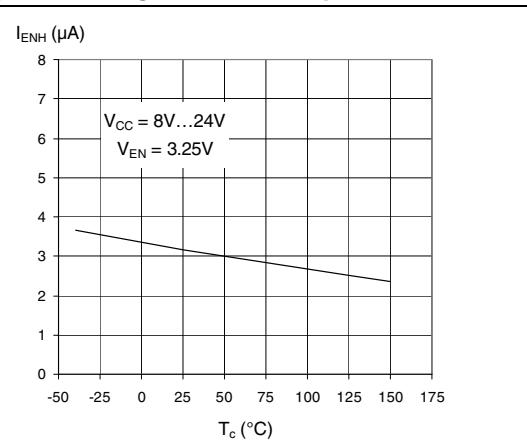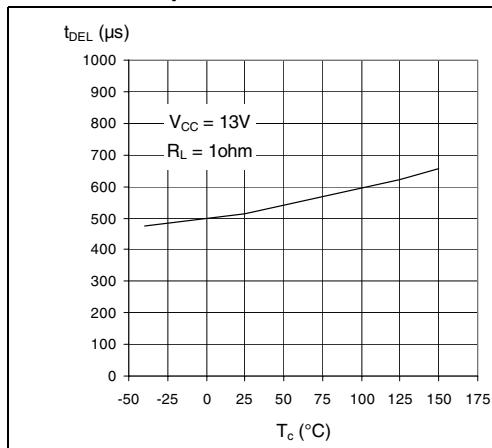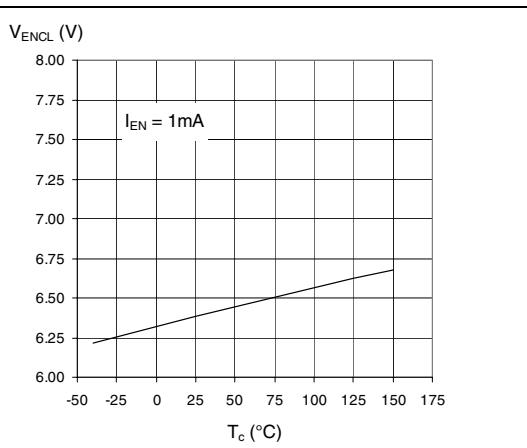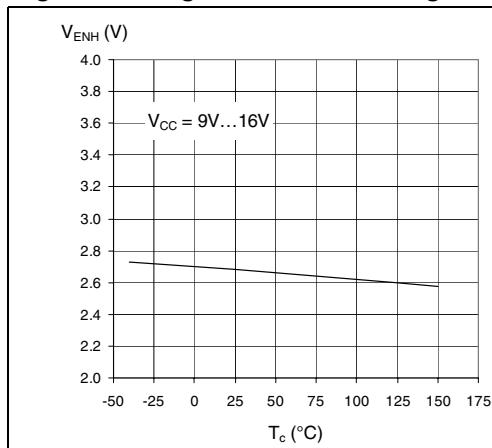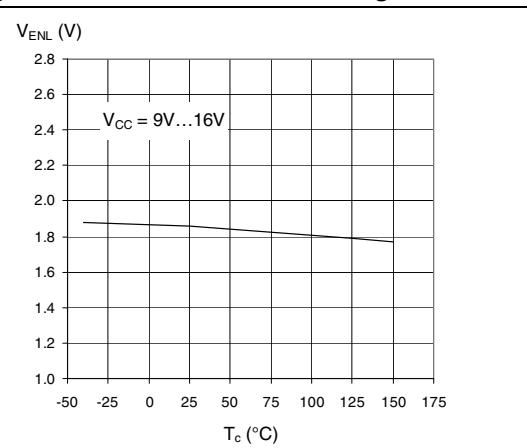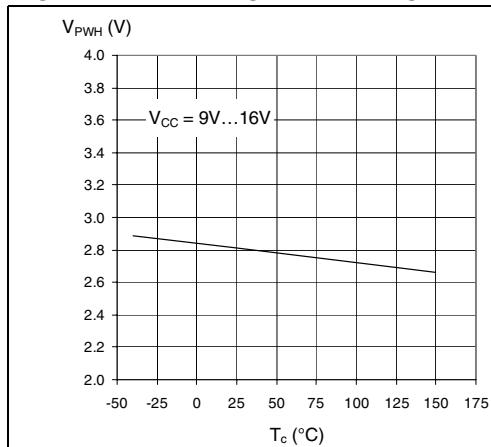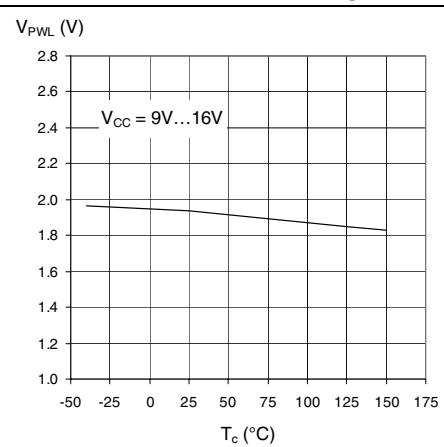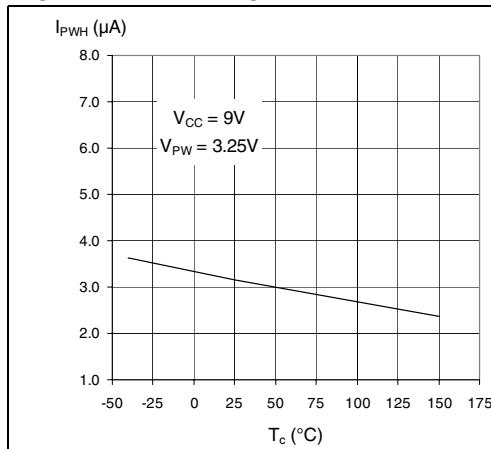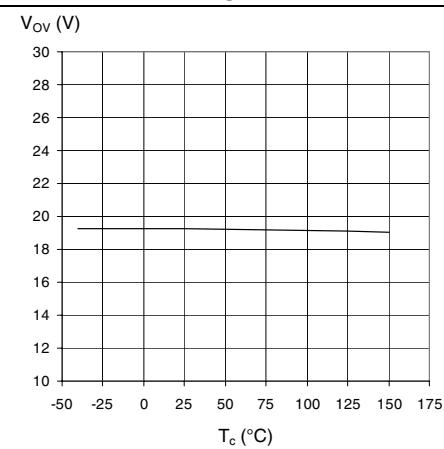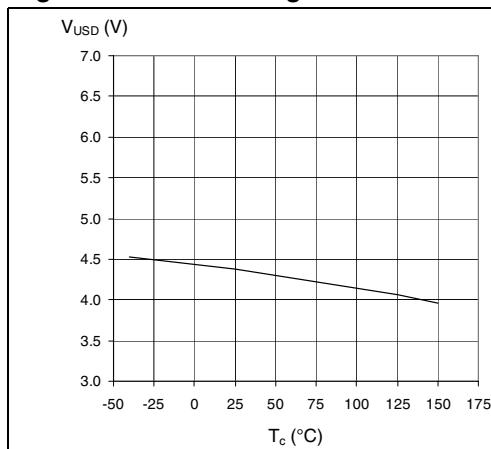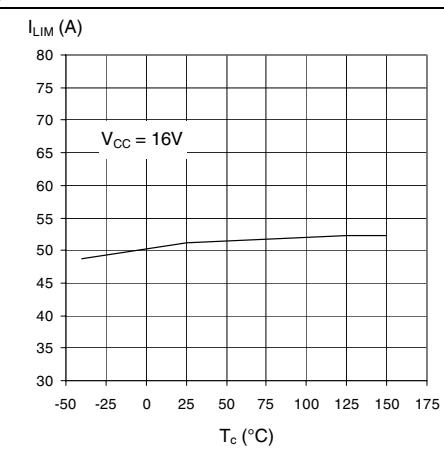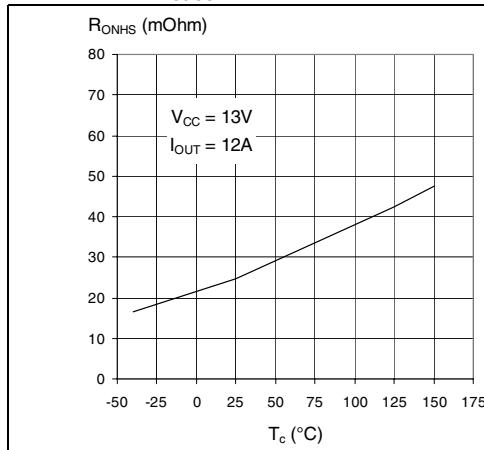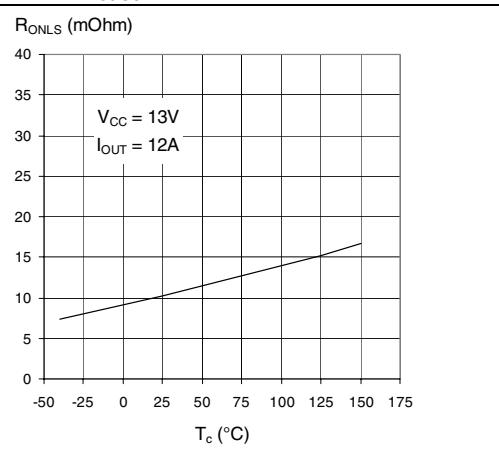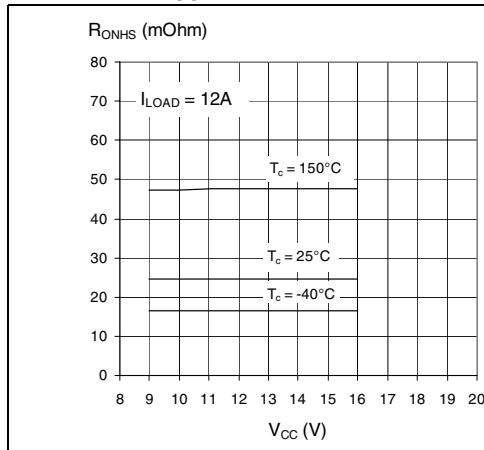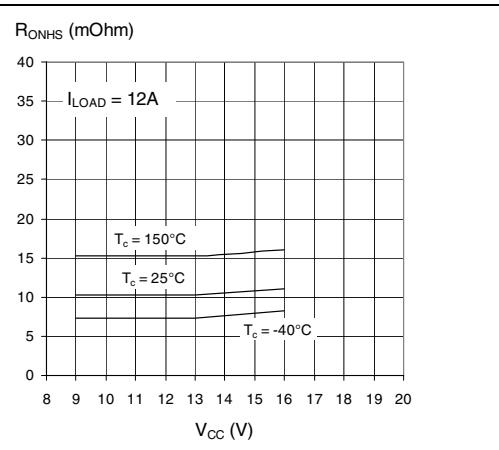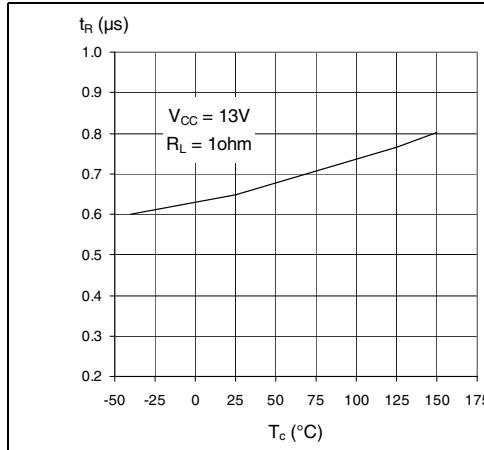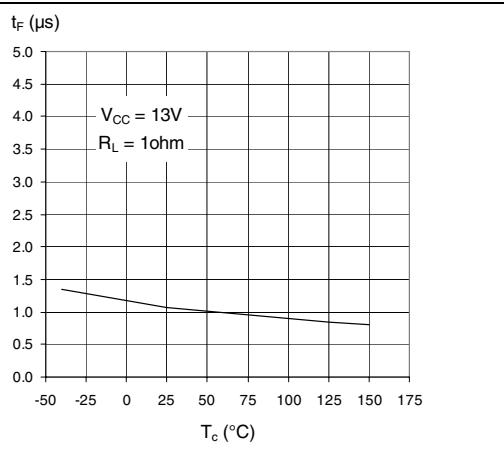

**Figure 14. Input hysteresis voltage****Figure 15. High-level enable pin current****Figure 16. Delay time during change of operation mode****Figure 17. Enable clamp voltage****Figure 18. High-level enable voltage****Figure 19. Low-level enable voltage**

**Figure 20. PWM high-level voltage****Figure 21. PWM low-level voltage****Figure 22. PWM high-level current****Figure 23. Overvoltage shutdown****Figure 24. Undervoltage shutdown****Figure 25. Current limitation**


**Figure 26. On state high-side resistance vs  $T_{case}$** **Figure 27. On state low-side resistance vs  $T_{case}$** **Figure 28. On state high-side resistance vs  $V_{CC}$** **Figure 29. On state low-side resistance vs  $V_{CC}$** **Figure 30. Output voltage rise time****Figure 31. Output voltage fall time**

### 3 Application information

In normal operating conditions the  $\text{DIAG}_X/\text{EN}_X$  pin is considered as an input pin by the device. This pin must be externally pulled high.

PWM pin usage: In all cases, a "0" on the PWM pin will turn off both  $\text{LS}_A$  and  $\text{LS}_B$  switches. When PWM rises back to "1",  $\text{LS}_A$  or  $\text{LS}_B$  turn on again depending on the input pin state.

**Figure 32. Typical application circuit for DC to 20 kHz PWM operation short circuit protection**

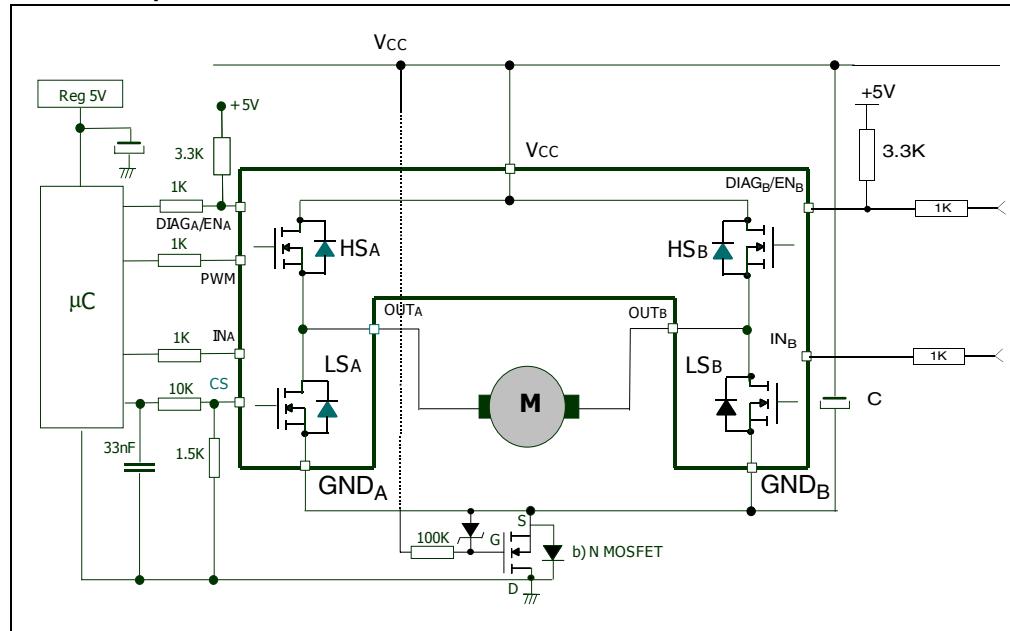

**Note:**

The value of the blocking capacitor ( $C$ ) depends on the application conditions and defines voltage and current ripple onto supply line at PWM operation. Stored energy of the motor inductance may fly back into the blocking capacitor, if the bridge driver goes into tri-state. This causes a hazardous overvoltage if the capacitor is not big enough. As basic orientation,  $500\mu\text{F}$  per  $10\text{A}$  load current is recommended.

In case of a fault condition the  $\text{DIAG}_X/\text{EN}_X$  pin is considered as an output pin by the device.

The fault conditions are:

overtemperature on one or both high sides

short to battery condition on the output (saturation detection on the low-side power MOSFET)

Possible origins of fault conditions may be:

$\text{OUT}_A$  is shorted to ground → overtemperature detection on high side A

$\text{OUT}_A$  is shorted to  $V_{CC}$  → low-side power MOSFET saturation detection

When a fault condition is detected, the user can know which power element is in fault by monitoring the IN<sub>A</sub>, IN<sub>B</sub>, DIAG<sub>A</sub>/EN<sub>A</sub> and DIAG<sub>B</sub>/EN<sub>B</sub> pins.

In any case, when a fault is detected, the faulty leg of the bridge is latched off. To turn on the respective output (OUT<sub>X</sub>) again, the input signal must rise from low to high level.

### 3.1 Reverse battery protection

Three possible solutions can be considered:

a Schottky diode D connected to V<sub>CC</sub> pin


an N-channel MOSFET connected to the GND pin (see [Figure 32: Typical application circuit for DC to 20 kHz PWM operation short circuit protection on page 20](#))

a P-channel MOSFET connected to the V<sub>CC</sub> pin


The device sustains no more than -30A in reverse battery conditions because of the two body diodes of the power MOSFETs. Additionally, in reverse battery condition the I/Os of are pulled down to the V<sub>CC</sub> line (approximately -1.5V). A series resistor must be inserted to limit the current sunk from the microcontroller I/Os. If I<sub>Rmax</sub> is the maximum target reverse current through µC I/Os, the series resistor is:

$$R = \frac{V_{IOs} - V_{CC}}{I_{Rmax}}$$


**Figure 33. Half-bridge configuration**

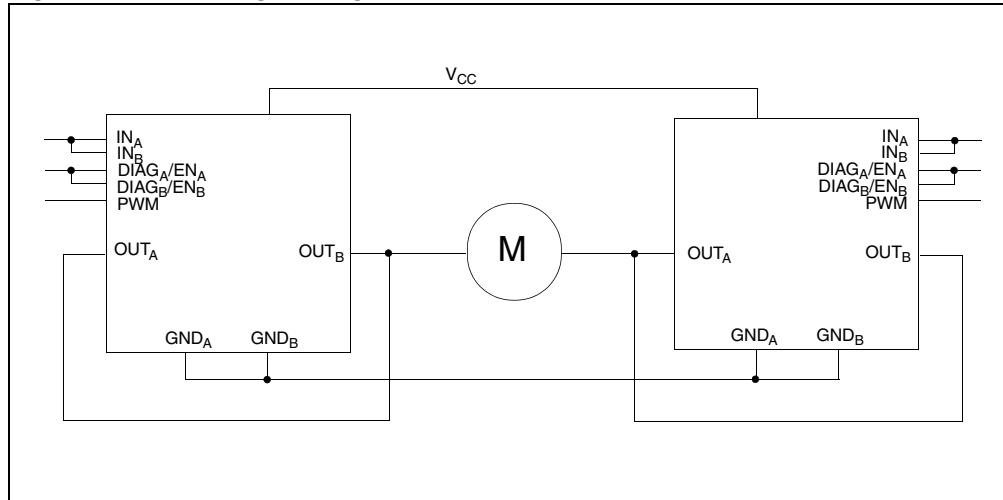


**Note:** The VNH3ASP30-E can be used as a high power half-bridge driver achieving an On resistance per leg of 21 mΩ

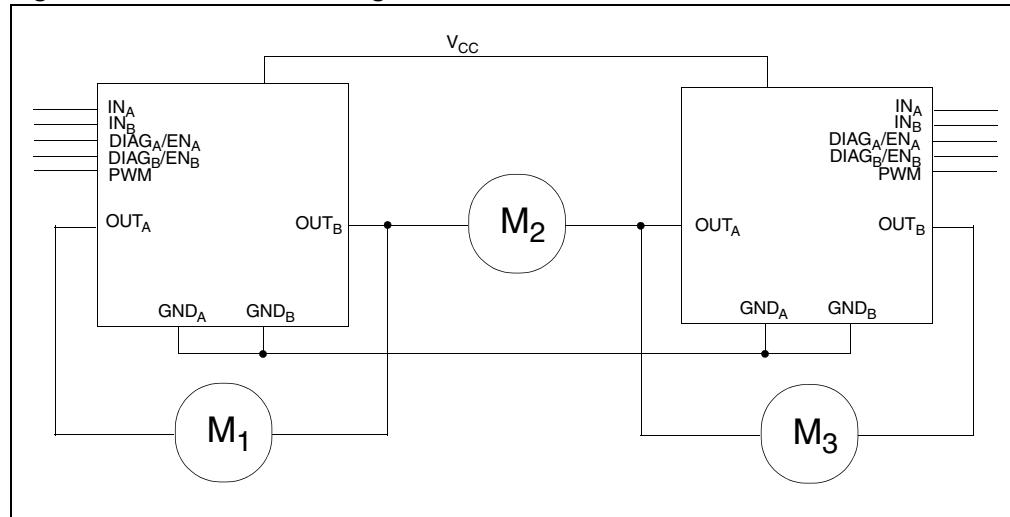**Figure 34. Multi-motors configuration**

**Note:** The VNH3ASP30-E can easily be designed in multi-motors driving applications such as seat positioning systems where only one motor must be driven at a time.  $\text{DIAG}_X/\text{EN}_X$  pins allow to put unused half-bridges in high impedance.

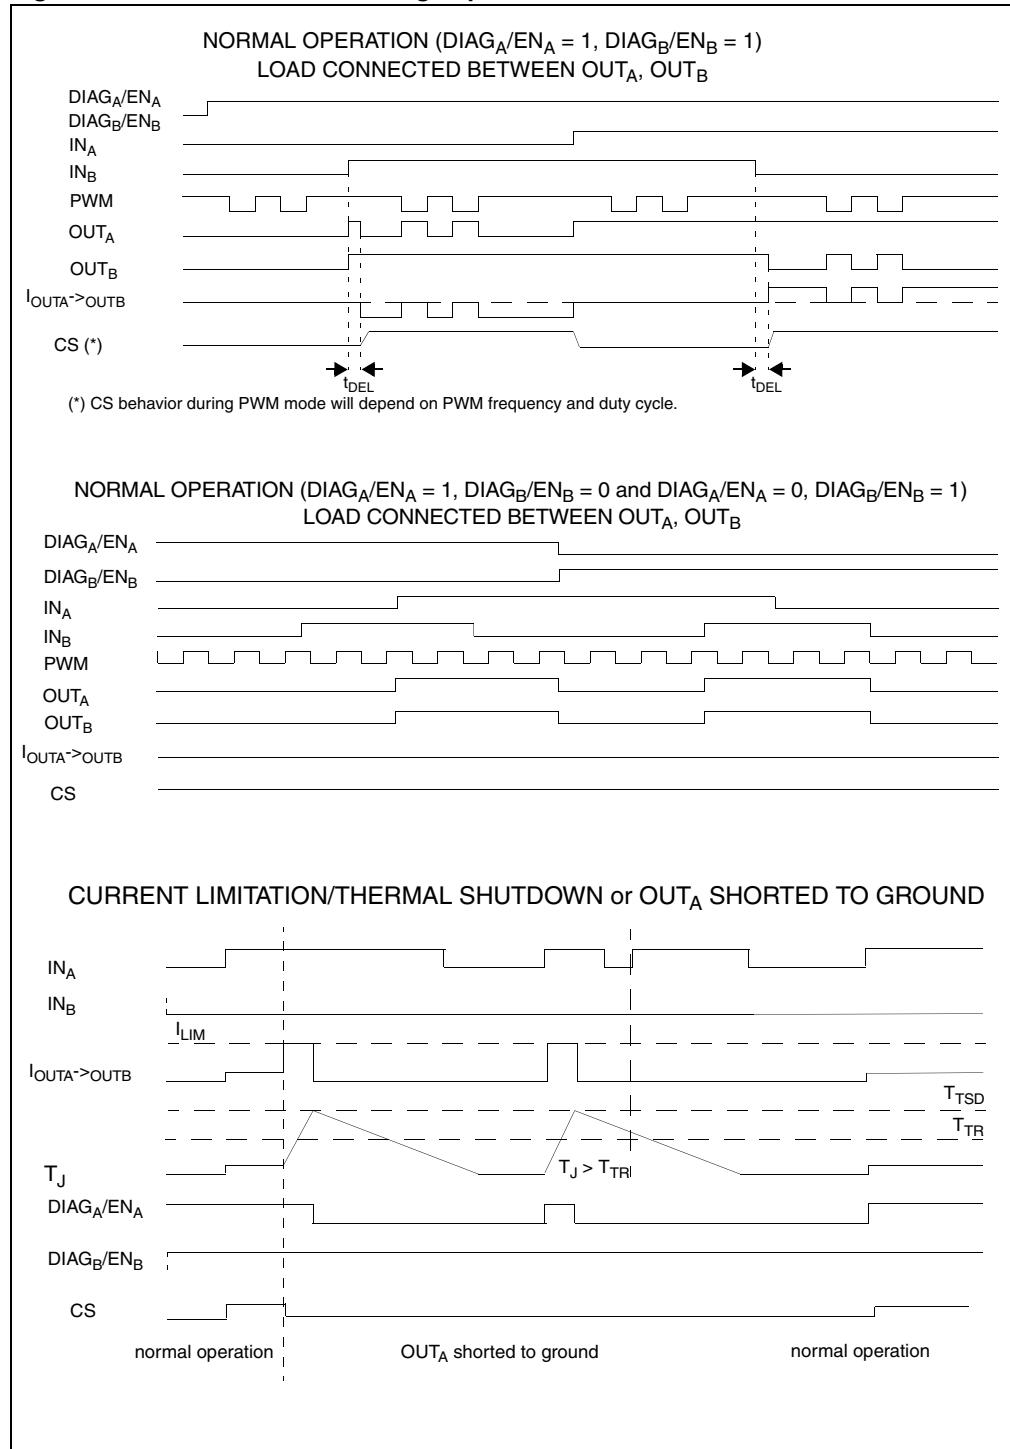
**Figure 35. Waveforms in full-bridge operation**

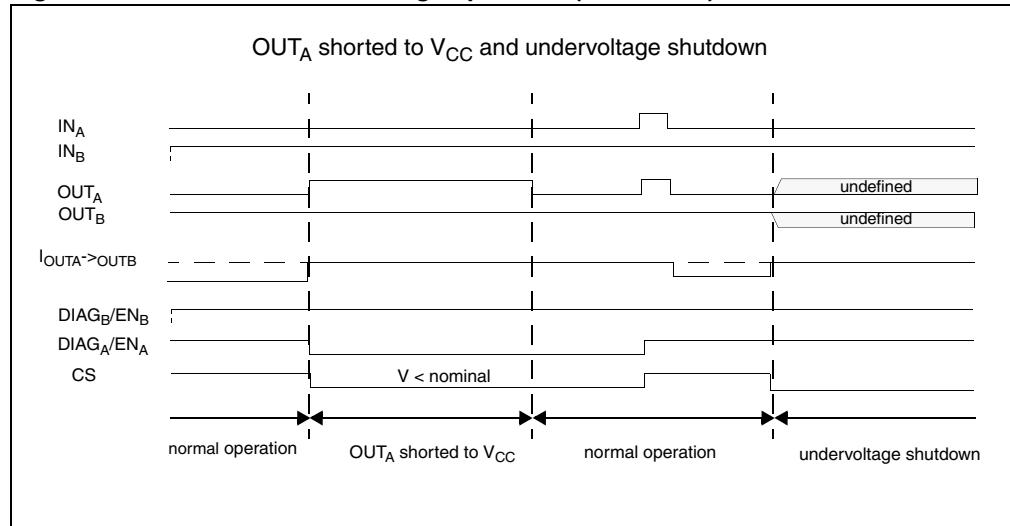**Figure 36. Waveforms in full-bridge operation (continued )**

## 4 Package and PCB thermal data

### 4.1 MultiPowerSO-30 thermal data

Figure 37. MultiPowerSO-30™ PC board

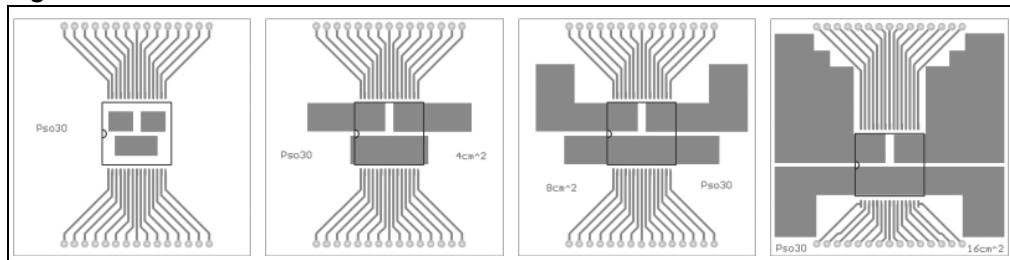

Note:

*Layout condition of R<sub>th</sub> and Z<sub>th</sub> measurements (PCB FR4 area= 58mm x 58mm, PCB thickness=2mm, Cu thickness=35µm, Copper areas: from minimum pad lay-out to 16cm<sup>2</sup>).*

Figure 38. Chipset configuration


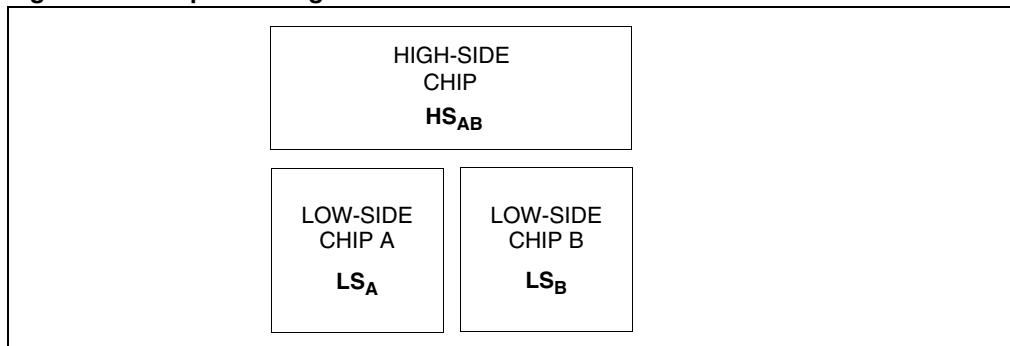


Figure 39. Auto and mutual R<sub>thJA</sub> vs PCB copper area in open box free air condition

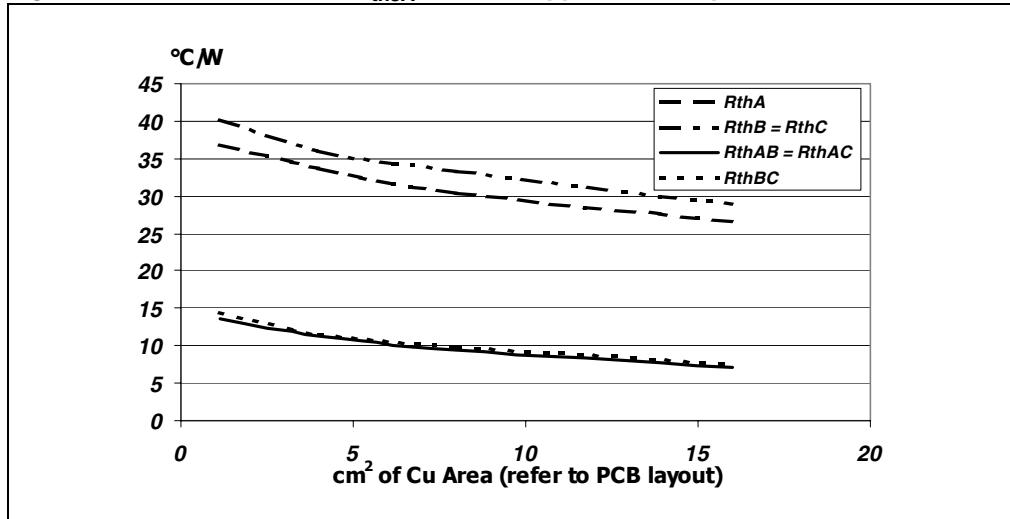

#### 4.1.1 Thermal calculation in clockwise and anti-clockwise operation in Steady-state mode

**Table 15. Thermal calculation in clockwise and anti-clockwise operation in Steady-state mode**

HS <sub>A</sub>	HS <sub>B</sub>	LS <sub>A</sub>	LS <sub>B</sub>	T <sub>JHSAB</sub>	T <sub>JLSA</sub>	T <sub>JLSB</sub>
ON	OFF	ON	ON	P <sub>dHSAB</sub> × R <sub>thHS</sub> + P <sub>dLSB</sub> × R <sub>thHSL</sub> + T <sub>A</sub>	P <sub>dHSAB</sub> × R <sub>thHSL</sub> + P <sub>dLSB</sub> × R <sub>thLSL</sub> + T <sub>A</sub>	P <sub>dHSAB</sub> × R <sub>thHSL</sub> + P <sub>dLSB</sub> × R <sub>thLS</sub> + T <sub>A</sub>
OFF	ON	OFF	OFF	P <sub>dHSB</sub> × R <sub>thHS</sub> + P <sub>dLSA</sub> × R <sub>thHSL</sub> + T <sub>A</sub>	P <sub>dHSB</sub> × R <sub>thHSL</sub> + P <sub>dLSA</sub> × R <sub>thLS</sub> + T <sub>A</sub>	P <sub>dHSB</sub> × R <sub>thHSL</sub> + P <sub>dLSA</sub> × R <sub>thLSL</sub> + T <sub>A</sub>

#### 4.1.2 Thermal resistances definition (values according to the PCB heatsink area)

R<sub>thHS</sub> = R<sub>thHSA</sub> = R<sub>thHSB</sub> = High-Side Chip Thermal Resistance Junction to Ambient (HS<sub>A</sub> or HS<sub>B</sub> in ON state)

R<sub>thLS</sub> = R<sub>thLSA</sub> = R<sub>thLSB</sub> = Low-Side Chip Thermal Resistance Junction to Ambient

R<sub>thHSL</sub> = R<sub>thHSALSB</sub> = R<sub>thHSBLSA</sub> = Mutual Thermal Resistance Junction to Ambient between High-Side and Low-Side Chips

R<sub>thLSL</sub> = R<sub>thLSALSB</sub> = Mutual Thermal Resistance Junction to Ambient between Low-Side Chips

#### 4.1.3 Thermal calculation in Transient mode<sup>(a)</sup>

$$T_{JHSAB} = Z_{thHS} \times P_{dHSAB} + Z_{thHSL} \times (P_{dLSA} + P_{dLSB}) + T_A$$

$$T_{JLSA} = Z_{thHSL} \times P_{dHSAB} + Z_{thLS} \times P_{dLSA} + Z_{thLSL} \times P_{dLSB} + T_A$$

$$T_{JLSB} = Z_{thHSL} \times P_{dHSAB} + Z_{thLSL} \times P_{dLSA} + Z_{thLS} \times P_{dLSB} + T_A$$

#### 4.1.4 Single pulse thermal impedance definition (values according to the PCB heatsink area)

Z<sub>thHS</sub> = High-Side Chip Thermal Impedance Junction to Ambient

Z<sub>thLS</sub> = Z<sub>thLSA</sub> = Z<sub>thLSB</sub> = Low-Side Chip Thermal Impedance Junction to Ambient

Z<sub>thHSL</sub> = Z<sub>thHSALSA</sub> = Z<sub>thHSBLSA</sub> = Mutual Thermal Impedance Junction to Ambient between High-Side and Low-Side Chips



Z<sub>thLSL</sub> = Z<sub>thLSALSB</sub> = Mutual Thermal Impedance Junction to Ambient between Low-Side Chips


a. Calculation is valid in any dynamic operating condition. P<sub>d</sub> values set by user.

**Equation 1: pulse calculation formula**

$$Z_{TH\delta} = R_{TH} \cdot \delta + Z_{THtp}(1 - \delta)$$

where  $\delta = t_p / T$

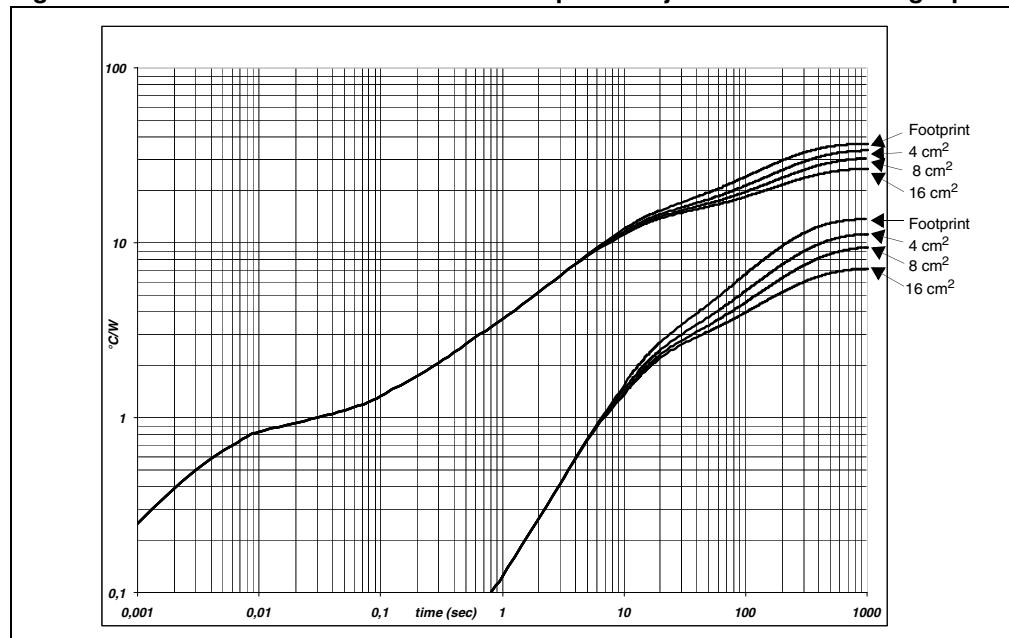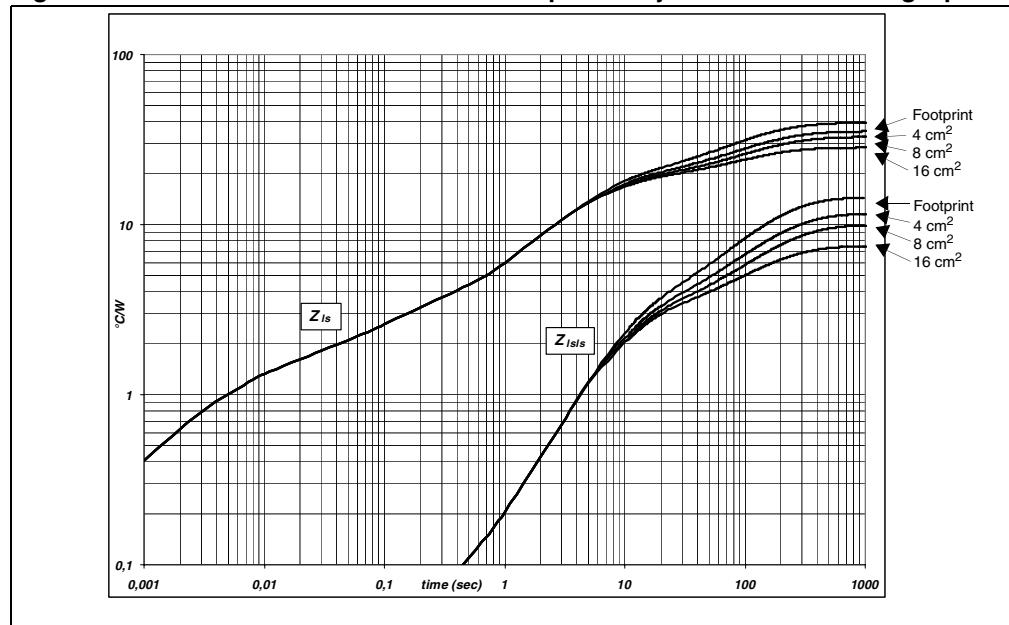**Figure 40. MultiPowerSO-30 HSD thermal impedance junction ambient single pulse****Figure 41. MultiPowerSO-30 LSD thermal impedance junction ambient single pulse**

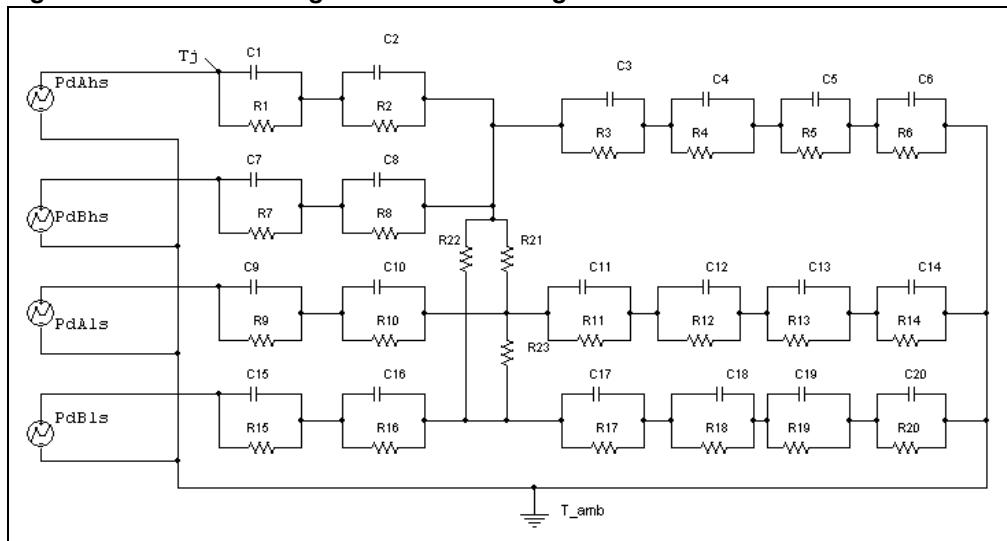**Figure 42.** Thermal fitting model of an H-bridge in MultiPowerSO-30**Table 16.** Thermal parameters<sup>(1)</sup>

Area/island (cm <sup>2</sup> )	Footprint	4	8	16
R1 = R7 (°C/W)	0.05			
R2 = R8 (°C/W)	0.3			
R3 (°C/W)	0.5			
R4 (°C/W)	1.3			
R5 (°C/W)	14			
R6 (°C/W)	44.7	39.1	31.6	23.7
R9 = R15 (°C/W)	0.11			
R10 = R16 (°C/W)	0.21			
R11 = R17 (°C/W)	0.42			
R12 = R18 (°C/W)	1.5			
R13 = R19 (°C/W)	20			
R14 = R20 (°C/W)	46.9	36.1	30.4	20.8
R21 = R22 = R23 (°C/W)	115			
C1 = C7 (W.s/°C)	0.005			
C2 = C8 (W.s/°C)	0.008			
C3	0.01			
C4 = C13 = C19 (W.s/°C)	0.3			
C5 (W.s/°C)	0.6			
C6 (W.s/°C)	5	7	9	11
C9 = C15 (W.s/°C)	0.0016			
C10 = C16 (W.s/°C)	0.0032			
C11 = C17 (W.s/°C)	0.0053			
C12 = C18 (W.s/°C)	0.075			
C14 = C20 (W.s/°C)	2.5	3.5	4.5	5.5

1. The blank space means that the value is the same as the previous one.

## 5 Package and packing information


### 5.1 ECOPACK® packages

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second-level interconnect. The category of Second-Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97.

The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).

### 5.2 MultiPowerSO-30 package mechanical data

**Figure 43.** MultiPowerSO-30 package outline

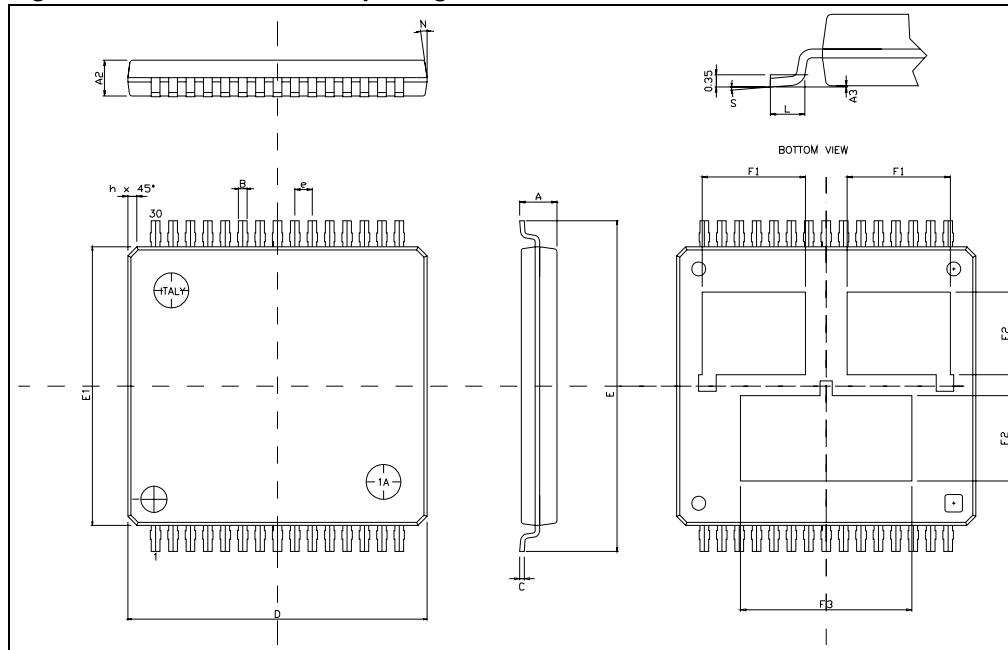


**Table 17.** MultiPowerSO-30 mechanical data

Symbol	Millimeters		
	Min	Typ	Max
A			2.35
A2	1.85		2.25
A3	0		0.1
B	0.42		0.58
C	0.23		0.32
D	17.1	17.2	17.3
E	18.85		19.15

**Table 17. MultiPowerSO-30 mechanical data (continued)**


Symbol	Millimeters		
	Min	Typ	Max
E1	15.9	16	16.1
e		1	
F1	5.55		6.05
F2	4.6		5.1
F3	9.6		10.1
L	0.8		1.15
N			10 deg
S	0 deg		7 deg

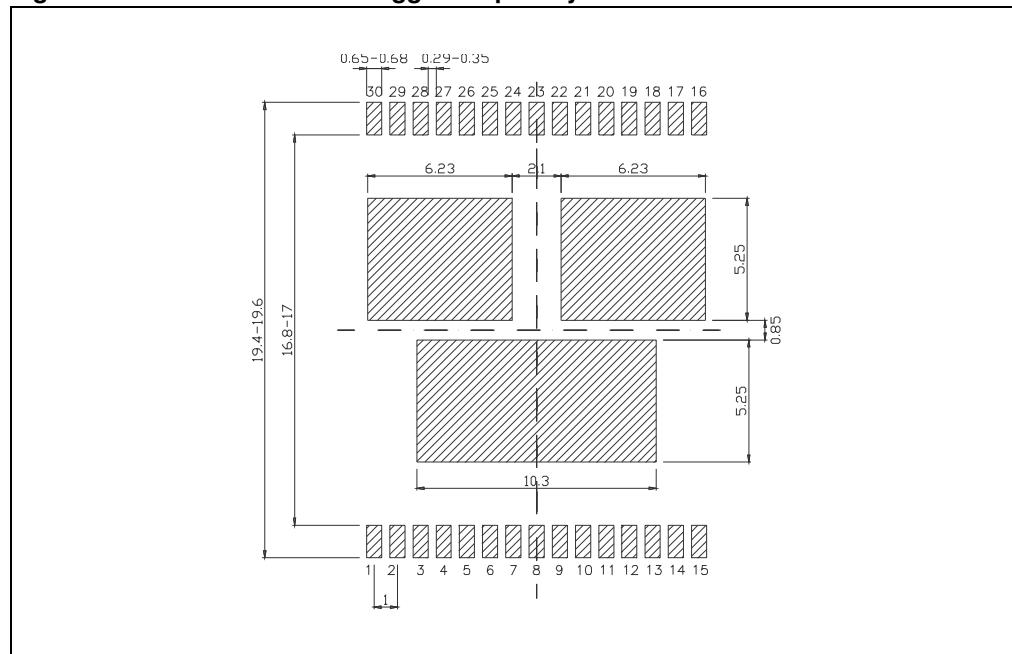**Figure 44. MultiPowerSO-30 suggested pad layout**


## 5.3 Packing information

**Note:** The devices can be packed in tube or tape and reel shipments (see the [Device summary on page 1](#) for packaging quantities).

**Figure 45. MultiPowerSO-30 tube shipment (no suffix)**

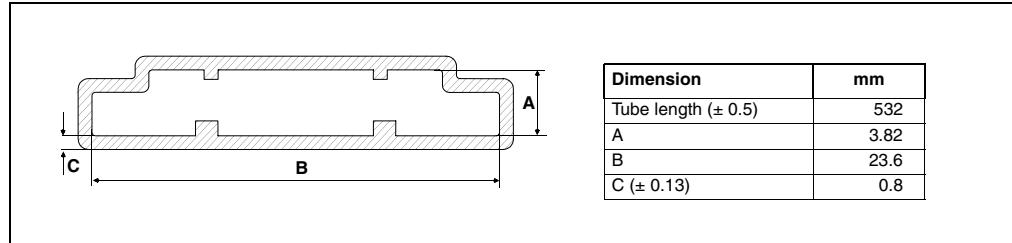

**Figure 46. MultiPowerSO-30 tape and reel shipment (suffix "TR")**

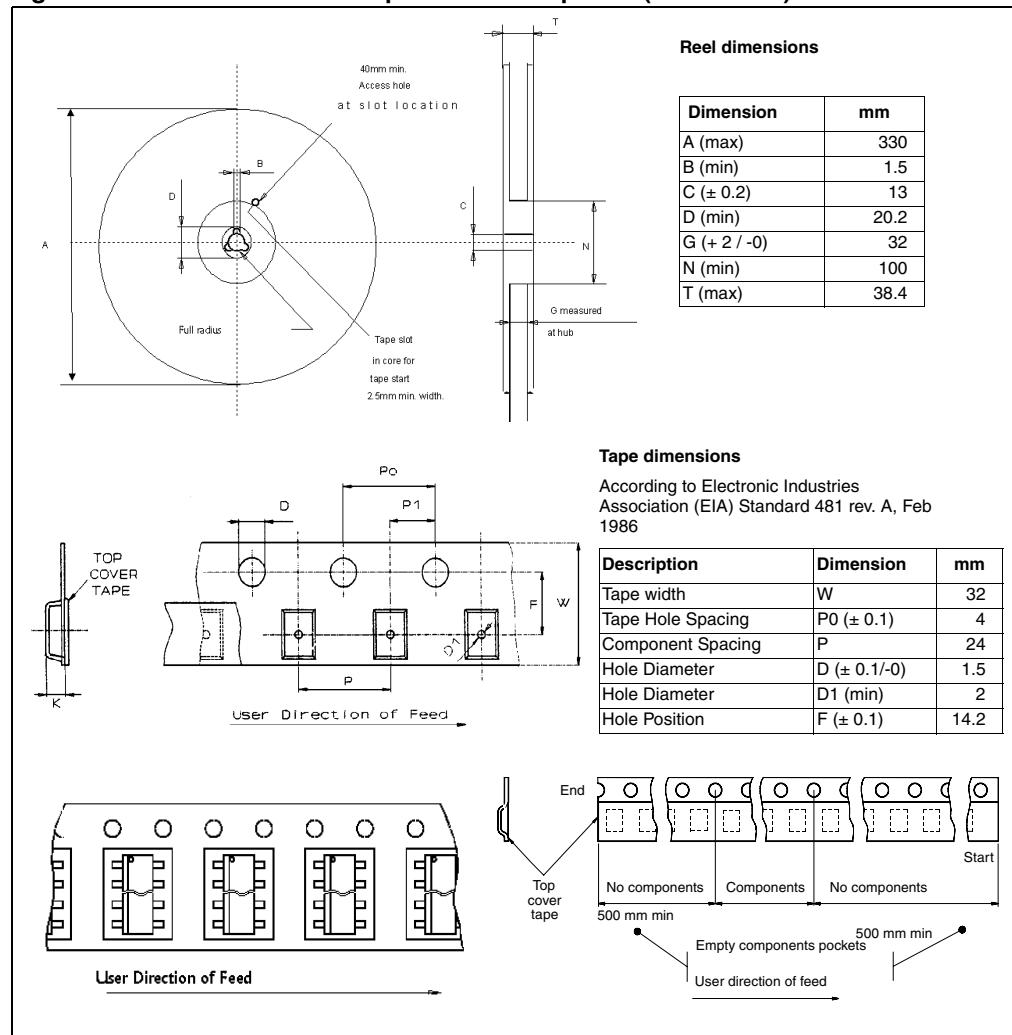

## 6 Revision history

**Table 18. Document revision history**

Date	Revision	Description of changes
Sep-2004	1	First issue
Dec-2005	2	Resistance per leg modification <i>Figure 33: Half-bridge configuration on page 21</i>
6-Feb-2007	3	<p>Document converted into new ST template.          Changed <i>Features on page 1</i> to add ECOPACK® package          Removed Table 7. Thermal Data from page 4  <i>Table 6: Power section on page 9</i>: Changed test conditions and max values for supply current in Off state and On state  <i>Table 7: Logic inputs (INA, INB, ENA, ENB) on page 9</i>: Modified parameter descriptions for <math>I_{INL}</math> and <math>I_{INH}</math>  <i>Table 8: PWM on page 10</i>: Modified parameter descriptions for <math>I_{PWL}</math> and <math>I_{PWH}</math>  <i>Table 10: Protection and diagnostic on page 10</i>: Modified all symbols except <math>I_{LIM}</math> and <math>V_{CLP}</math>  <i>Table 11 on page 11</i>: Changed test conditions for <math>K_2</math> analog sense current drift  <i>Section Table 13.: Truth table in fault conditions (detected on OUTA) on page 14</i>: Changed first of two fault conditions  <i>Figure 6: Definition of the high-side switching times on page 13</i>: Added vertical limitation line to left side of <math>t_{D(off)}</math> arrow  <i>Figure 36: Waveforms in full-bridge operation (continued ) on page 24</i>: Added dotted vertical limitation lines          Added <i>Section 2.3: Electrical characteristics curves on page 16</i>          Added <i>Section 4: Package and PCB thermal data on page 25</i>          Added <i>Section 5: Package and packing information on page 29</i>          Updated disclaimer on last page       </p>
01-Jun-2007	4	<p>Document reformatted.  <i>Table 6: Power section on page 9</i>: changed test conditions and max values for supply current in Off state       </p>
06-Feb-2008	5	Corrected Heat Slug numbers in <i>Table 3: Pin definitions and functions</i> .

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

