

General Description

The MIC281 is a digital thermal sensor capable of measuring the temperature of a remote PN junction. It is optimized for applications favoring low cost and small size. The remote junction may be an inexpensive commodity transistor, e.g., 2N3906, or an embedded thermal diode such as found in Intel Pentium® II/III/IV CPUs, AMD Athlon® CPUs, and Xilinx Virtex® FPGAs.

The MIC281 is 100% software and hardware backward compatible with the MIC280 and features the same industry-leading noise performance and small size. The advanced integrating A/D converter and analog front-end reduce errors due to noise for maximum accuracy and minimum guardbanding.

A 2-wire SMBus 2.0-compatible serial interface is provided for host communication. The clock and data pins are 5V-tolerant regardless of the value of V_{DD}. They will not clamp the bus lines low even if the device is powered down.

Superior performance, low power, and small size make the MIC281 an excellent choice for cost-sensitive thermal management applications.


Features

- Remote temperature measurement using embedded thermal diodes or commodity transistors
- Accurate remote sensing
±3°C max., 0°C to 100°C
- Excellent noise rejection
- I²C and SMBus 2.0 compatible serial interface
- SMBus timeout to prevent bus lockup
- Voltage tolerant I/Os
- Low power shutdown mode
- Failsafe response to diode faults
- 3.0V to 3.6V power supply range
- IttyBitty™ SOT23-6 Package

Applications

- Desktop, server and notebook computers
- Set-top boxes
- Game consoles
- Appliances

Typical Application

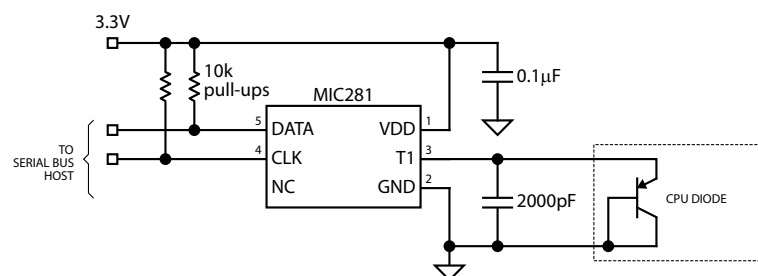

MIC281 Typical Application

IttyBitty is a registered trademark of Micrel, Inc.


*All trademarks are the property of their respective owners.

Ordering Information

| Part Number | | | | Slave Address | Ambient Temp. Range | Package |
|--------------|---------|--------------|--------------|------------------------|---------------------|---------|
| Standard | Marking | Pb-FREE | Marking | | | |
| MIC281-0BM6* | TB00 | MIC281-0YM6* | <u>T</u> B00 | 1001 000x _b | -55°C to +125°C | SOT23-6 |
| MIC281-1BM6* | TB01 | MIC281-1YM6* | <u>T</u> B01 | 1001 001x _b | -55°C to +125°C | SOT23-6 |
| MIC281-2BM6* | TB02 | MIC281-2YM6* | <u>T</u> B02 | 1001 010x _b | -55°C to +125°C | SOT23-6 |
| MIC281-3BM6* | TB03 | MIC281-3YM6* | <u>T</u> B03 | 1001 011x _b | -55°C to +125°C | SOT23-6 |
| MIC281-4BM6 | TB04 | MIC281-4YM6 | <u>T</u> B05 | 1001 100x _b | -55°C to +125°C | SOT23-6 |
| MIC281-5BM6* | TB05 | MIC281-5YM6* | <u>T</u> B05 | 1001 101x _b | -55°C to +125°C | SOT23-6 |
| MIC281-6BM6* | TB06 | MIC281-6YM6* | <u>T</u> B06 | 1001 110x _b | -55°C to +125°C | SOT23-6 |
| MIC281-7BM6* | TB07 | MIC281-7YM6* | <u>T</u> B07 | 1001 111x _b | -55°C to +125°C | SOT23-6 |

* Contact Micrel regarding availability

Pin Configuration



Pin Description

| Pin | Pin Name | Pin Description |
|-----|----------|--|
| 1 | VDD | Analog Input: Power supply input to the IC. |
| 2 | GND | Ground return for all IC functions. |
| 3 | T1 | Analog Input: Connection to remote diode junction. |
| 4 | CLK | Digital Input: Serial bit clock input. |
| 5 | DATA | Digital I/O: Open-drain. Serial data input/output. |
| 6 | NC | No Connection: Must be left unconnected. |

Absolute Maximum Ratings (Note 1)

| | |
|--|--------------------------------------|
| Power Supply Voltage, V_{DD} | 3.8V |
| Voltage on T1 | -0.3V to $V_{DD}+0.3V$ |
| Voltage on CLK, DATA..... | -0.3V to 6.0V |
| Current Into Any Pin | $\pm 10mA$ |
| Power Dissipation, $T_A = 125^\circ C$ | 109mW |
| Junction Temperature | 150°C |
| Storage Temperature | -65°C to +150°C |
| ESD Ratings, Note 7 | |
| Human Body Model | 1.5kV |
| Machine Model | 200V |
| Soldering (SOT23-6 Package) | |
| Vapor Phase (60s) | 220 ⁺⁵ / ₋₀ °C |
| Infrared (15s) | 235 ⁺⁵ / ₋₀ °C |

Operating Ratings (Note 2)

| | |
|--|----------------|
| Power Supply Voltage, V_{DD} | +3.0V to +3.6V |
| Ambient Temperature Range (T_A) | -40°C to +85°C |
| Package Thermal Resistance (θ_{JA}) | |
| SOT-23-6 | 230°C/W |

Electrical Characteristics

For typical values, $T_A=25^\circ C$, $V_{DD}=3.3V$ unless otherwise noted. **Bold** values are for $T_{MIN} \leq T_A \leq T_{MAX}$ unless otherwise noted. **Note 2**

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|---|--|--|------------|---------|-------------|------------|
| Power Supply | | | | | | |
| I_{DD} | Supply Current | T1 open; CLK=DATA=High; Normal Mode | | 0.23 | 0.4 | mA |
| | | Shutdown mode; T1 open; CLK = 100kHz; Note 5 | | 9 | | μA |
| | | Shutdown Mode; T1 open; CLK=DATA=High | | 6 | | μA |
| t_{POR} | Power-on reset time, Note 5 | $V_{DD} > V_{POR}$ | | 200 | | μs |
| V_{POR} | Power-on reset voltage | All registers reset to default values; A/D conversions initiated | | 2.65 | 2.95 | V |
| V_{HYST} | Power-on reset hysteresis voltage Note 5 | | | 300 | | mV |
| Temperature-to-Digital Converter Characteristics | | | | | | |
| | Accuracy, Notes 3, 5, 6 | $0^\circ C \leq T_D \leq 100^\circ C$; $0^\circ C \leq T_A \leq 85^\circ C$; $3.15V \leq V_{DD} \leq 3.45V$ | | ± 1 | ± 3 | $^\circ C$ |
| | | $-40^\circ C \leq T_D \leq 125^\circ C$; $0^\circ C \leq T_A \leq 85^\circ C$; $3.15V \leq V_{DD} \leq 3.45V$ | | ± 2 | ± 5 | $^\circ C$ |
| t_{CONV} | Conversion time, Note 5 | | | 200 | 240 | ms |
| Remote Temperature Input, T1 | | | | | | |
| I_F | Current into External Diode Note 5 | T1 forced to 1.0V, high level | | 192 | 400 | μA |
| | | Low level | 7 | 12 | | μA |
| Serial Data I/O Pin, DATA | | | | | | |
| V_{OL} | Low Output Voltage, Note 4 | $I_{OL} = 3mA$ | | | 0.3 | V |
| | | $I_{OL} = 6mA$ | | | 0.5 | V |
| V_{IL} | Low Input Voltage | $3.0V \leq V_{DD} \leq 5.5V$ | | | 0.8 | V |
| V_{IH} | High Input Voltage | $3.0V \leq V_{DD} \leq 5.5V$ | 2.1 | | 5.5 | V |
| C_{IN} | Input Capacitance, Note 5 | | | 10 | | pF |
| I_{LEAK} | Input Current | | | | ± 1 | μA |

| Symbol | Parameter | Condition | Min | Typ | Max | Units |
|--------------------------------|------------------------------------|------------------------------|-----|-----|---------|---------|
| Serial Clock Input, CLK | | | | | | |
| V_{IL} | Low Input Voltage | $3.0V \leq V_{DD} \leq 3.6V$ | | | 0.8 | V |
| V_{IH} | High Input Voltage | $3.0V \leq V_{DD} \leq 3.6V$ | 2.1 | | 5.5 | V |
| C_{IN} | Input Capacitance, Note 5 | | | 10 | | pF |
| I_{LEAK} | Input current | | | | ± 1 | μA |
| Serial Interface Timing | | | | | | |
| t_1 | CLK (clock) period | | 2.5 | | | μs |
| t_2 | Data in Setup Time to CLK High | | 100 | | | ns |
| t_3 | Data Out Stable After CLK Low | | 300 | | | ns |
| t_4 | DATA Low Setup Time to CLK Low | Start Condition | 100 | | | ns |
| t_5 | DATA High Hold Time After CLK High | Stop Condition | 100 | | | ns |
| t_{TO} | Bus timeout | | 25 | 30 | 35 | ms |

Note 1. The device is not guaranteed to function outside its operating range.

Note 2. Final test on outgoing product is performed at $T_A = 25^\circ C$.

Note 3. T_D is the temperature of the remote diode junction. Testing is performed using a single unit of one of the transistors listed in Table 5.


Note 4. Current into the DATA pin will result in self-heating of the device. Sink current should be minimized for best accuracy.

Note 5. Guaranteed by design over the operating temperature range. Not 100% production tested.

Note 6. Accuracy specifications do not include quantization noise which may be up to $\pm 0.5LSB$.

Note 7. Devices are ESD sensitive. Observe appropriate handling precautions.










Timing Diagram

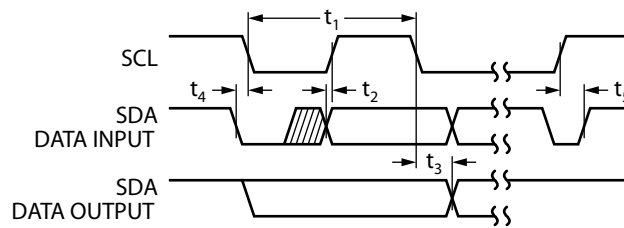

Serial Interface Timing

Typical Characteristics

$V_{DD} = 3.3V$; $T_A = 25^\circ C$, unless otherwise noted.

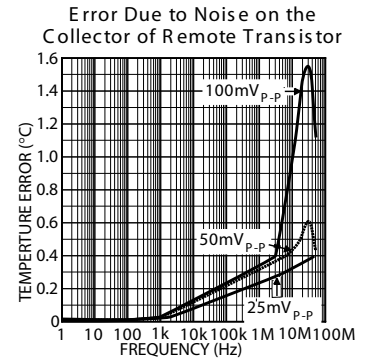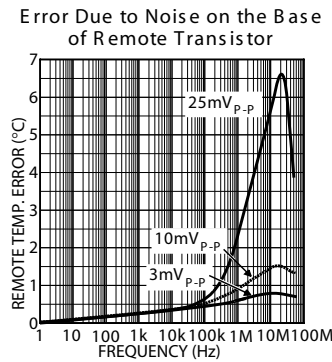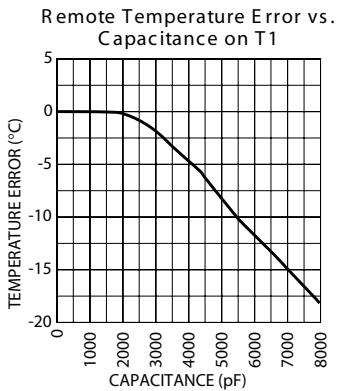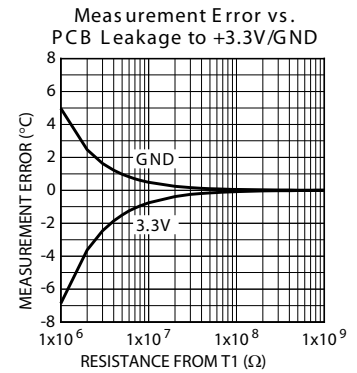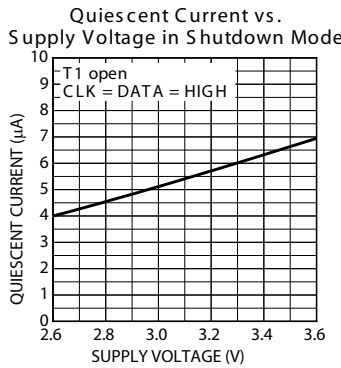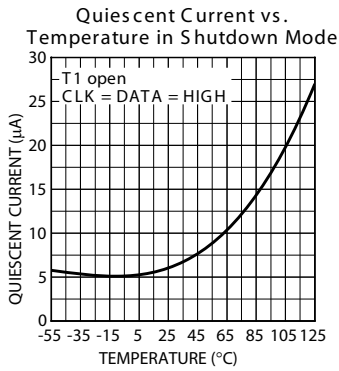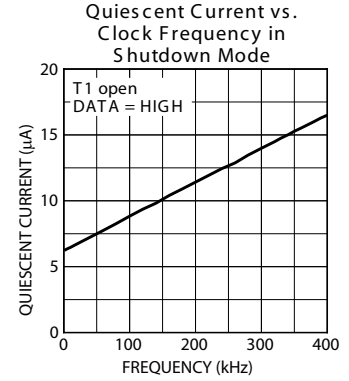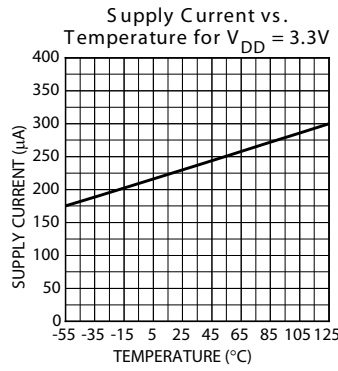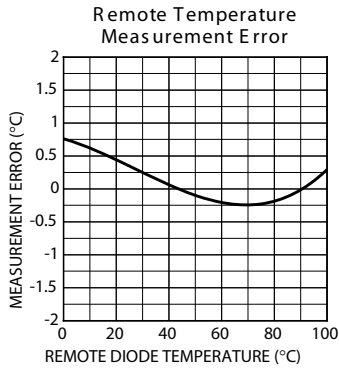

Functional Description

Serial Port Operation

The MIC281 uses standard SMBus Write_Byte and Read_Byte operations for communication with its host. The SMBus Write_Byte operation involves sending the device's slave address (with the R/W bit low to signal a write operation), followed by a command byte and the data byte. The SMBus Read_Byte operation is a composite write and read operation: the host first sends the device's slave address followed by the command byte, as in a write operation. A new start bit must then be sent to the MIC281, followed by a repeat of the

slave address with the R/W bit (LSB) set to the high (read) state. The data to be read from the part may then be clocked out. These protocols are shown in Figures 1 and 2.

The Command byte is eight bits (one byte) wide. This byte carries the address of the MIC281 register to be operated upon. The command byte values corresponding to the various MIC281 registers are shown in Table 1. Other command byte values are reserved, and should not be used.

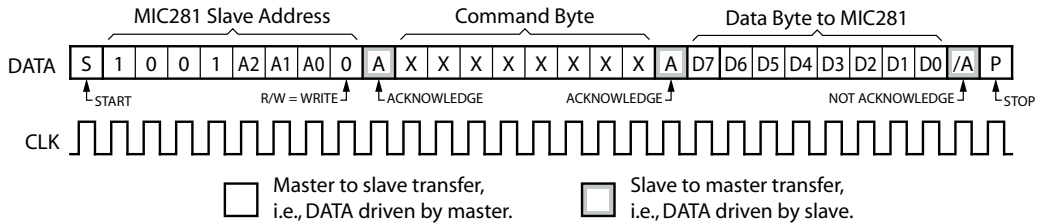


Figure 1. Write_Byte Protocol

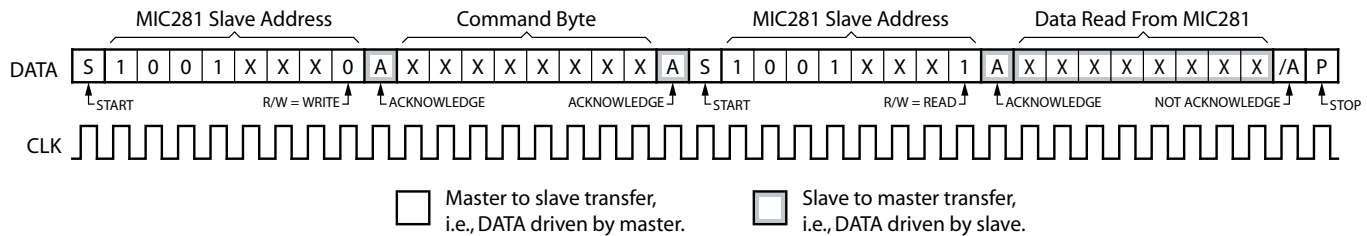


Figure 2. Read_Byte Protocol

| Target Register | | Command Byte Value | | Power-on Default |
|-----------------|------------------------------------|--------------------|-----------------|-----------------------|
| Label | Description | Read | Write | |
| TEMP | Remote temperature result | 01 _h | n/a | 00 _h (0°C) |
| CONFIG | Configuration | 03 _h | 03 _h | 80 _h |
| MFG_ID | Manufacturer identification | FE _h | n/a | 2A _h |
| DEV_ID | Device and revision identification | FF _h | n/a | 0x _h * |

* The lower nibble contains the die revision level, e.g., Rev 0 = 00h.

Table 1. MIC281 Register Addresses

Slave Address

The MIC281 will only respond to its own unique slave address. A match between the MIC281's address and the address specified in the serial bit stream must be made to initiate communication. The MIC281's slave address is fixed at the time of manufacture. Eight different slave addresses are available as determined by the part number. See Table 2 below and the Ordering Information table.

| Part Number | Slave Address |
|-------------|---|
| MIC281-0BM6 | 1001 000 _{x_b} = 90 _h |
| MIC281-1BM6 | 1001 001 _{x_b} = 92 _h |
| MIC281-2BM6 | 1001 010 _{x_b} = 94 _h |
| MIC281-3BM6 | 1001 011 _{x_b} = 96 _h |
| MIC281-4BM6 | 1001 100 _{x_b} = 98 _h |
| MIC281-5BM6 | 1001 101 _{x_b} = 9A _h |
| MIC281-6BM6 | 1001 110 _{x_b} = 9C _h |
| MIC281-7BM6 | 1001 111 _{x_b} = 9E _h |

Table 2. MIC281 Slave Addresses

Temperature Data Format

The least-significant bit of the temperature register represents one degree Centigrade. The values are in a two's complement format, wherein the most significant bit (D7) represents the sign: zero for positive temperatures and one for negative temperatures. Table 3 shows examples of the data format used by the MIC281 for temperatures.

| Temperature | Binary | Hex |
|-------------|-----------|-----|
| +127°C | 0111 1111 | 7F |
| +125°C | 0111 1101 | 7D |
| +25°C | 0001 1001 | 19 |
| +1°C | 0000 0001 | 01 |
| 0°C | 0000 0000 | 00 |
| -1°C | 1111 1111 | FF |
| -25°C | 1110 0111 | E7 |
| -125°C | 1000 0011 | 83 |
| -128°C | 1000 0000 | 80 |

Table 3. Digital Temperature Format

Diode Faults

The MIC281 is designed to respond in a failsafe manner to diode faults. If an internal or external fault occurs in the temperature sensing circuitry, such as T1 being open or shorted to V_{DD} or GND, the temperature result will be reported as the maximum full-scale value, +127°C. Note that diode faults will not be detected until the first A/D conversion cycle is completed following power-up or exiting shutdown mode.

Shutdown Mode

Setting the shutdown bit in the configuration register will cause the MIC281 to cease operation. The A/D converter will stop and power consumption will drop to the I_{SHDN} level. No registers will be affected by entering shutdown mode. The last temperature reading will persist in the TEMP register.

Detailed Register Descriptions

Remote Temperature Result (TEMP) 8-bits, read-only

| Remote Temperature Result Register | | | | | | | |
|------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| D[7] read-only | D[6] read-only | D[5] read-only | D[4] read-only | D[3] read-only | D[2] read-only | D[1] read-only | D[0] read-only |
| Temperature Data from ADC | | | | | | | |

| Bit | Function | Operation |
|--------|---|-----------|
| D[7:0] | Measured temperature data for the remote zone | Read-only |

Power-up default value: $0000\ 0000_b = 00_h$ (0°C)**

Command byte: $0000\ 0001_b = 01_h$

Each LSB represents one degree centigrade. The values are in a two's complement binary format such that 0°C is reported as 0000 0000b. See Temperature Data Format (above) for more details.

**TEMP will contain measured temperature data after the completion of one conversion.

Configuration Register (CONFIG) 8-bits, read/write

| Configuration Register | | | | | | | |
|------------------------|------------------|------------------|------------------|------------------|------------------|------------------|--------------------|
| D[7] reserved | D[6] reserved | D[5] reserved | D[4] reserved | D[3] reserved | D[2] reserved | D[1] reserved | D[0] write-only |
| Reserved | Shutdown (SHDN) | reserved | | | | | |

| Bits(s) | Function | Operation* |
|---------|--------------|---------------------------------------|
| D7 | Reserved | Always write as zero; reads undefined |
| SHDN | Shutdown bit | 0 = normal operation, 1 = shutdown |
| D[5:0] | Reserved | Always write as zero; reads undefined |

Power-up default value: $x0xx\ xxxx_b$ (Not in shutdown mode)

Command byte: $0000\ 0011_b = 03_h$

* Any write to CONFIG will result in any A/D conversion in progress being aborted and the result discarded. The A/D will begin a new conversion sequence once the write operation is complete.

Manufacturer ID Register (MFG_ID)
8-bits, read-only

| Manufacturer ID Register | | | | | | | |
|--------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| D[7] read-only | D[6] read-only | D[5] read-only | D[4] read-only | D[3] read-only | D[2] read-only | D[1] read-only | D[0] read-only |
| 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

| BIT(S) | FUNCTION | Operation* |
|--------|---|---|
| D[7:0] | Identifies Micrel as the manufacturer of the device. Always returns 2A _h . | Read-only. Always returns 2A _h |

Power-up default value: 0010 1010_b = 2A_h

Read command byte: 1111 1110_b = FE_h

Die Revision Register (DIE_REV)
8-bits, read-only

| Die Revision Register | | | | | | | |
|----------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| D[7] read-only | D[6] read-only | D[5] read-only | D[4] read-only | D[3] read-only | D[2] read-only | D[1] read-only | D[0] read-only |
| MIC281 DIE REVISION NUMBER | | | | | | | |

| Bit(s) | Function | Operation* |
|--------|---------------------------------------|------------|
| D[7:0] | Identifies the device revision number | Read-only |

Power-up default value: [Device revision number]_h

Read command byte: 1111 1111_b = FF_h

Application Information

Remote Diode Selection

Most small-signal PNP transistors with characteristics similar to the JEDEC 2N3906 will perform well as remote temperature sensors. Table 4 lists several examples of such parts that Micrel has tested for use with the MIC281. Other transistors equivalent to these should also work well.

| Vendor | Part Number | Package |
|-------------------------|-------------|---------|
| Fairchild Semiconductor | MMBT3906 | SOT-23 |
| On Semiconductor | MMBT3906L | SOT-23 |
| Infineon Technologies | SMBT3906 | SOT-23 |
| Samsung Semiconductor | KST3906-TF | SOT-23 |

Table 4. Transistors Suitable for Use as Remote Diodes

Minimizing Errors

Self-Heating

One concern when using a part with the temperature accuracy and resolution of the MIC281 is to avoid errors induced by self-heating ($V_{DD} \times I_{DD}$) + ($V_{OL} \times I_{OL}$). In order to understand what level of error this might represent, and how to reduce that error, the dissipation in the MIC281 must be calculated and its effects reduced to a temperature offset. The worst-case operating condition for the MIC281 is when $V_{DD} = 3.6V$. The maximum power dissipated in the part is given in Equation 1 below.

In most applications, the DATA pin will have a duty cycle of substantially below 25% in the low state. These considerations, combined with more typical device and application parameters, give a better system-level view of device self-heating. This is illustrated by Equation 2. In any application, the best approach is to verify performance against calculation in the final application environment. This is especially true when dealing with systems for which some temperature data may be poorly defined or unobtainable except by empirical means.

$$P_D = [(I_{DD} \times V_{DD}) + (I_{OL(DATA)} \times V_{OL(DATA)})]$$

$$P_D = [(0.4mA \times 3.6V) + (6mA \times 0.5V)]$$

$$P_D = 4.44mW$$

$R_{\theta(J-A)}$ of SOT23-6 package is 230°C/W, therefore...

the theoretical maximum self-heating is:

$$4.44mW \times 230^\circ C/W = 1.02^\circ C$$

Equation 1. Worst-Case Self-Heating

$$P_D = [(I_{DD} \times V_{DD}) + (I_{OL(DATA)} \times V_{OL(DATA)})]$$

$$P_D = [(0.23mA \times 3.3V) + (25\% \times 1.5mA \times 0.15V)]$$

$$P_D = 0.815mW$$

$R_{\theta(J-A)}$ of SOT23-6 package is 230°C/W, therefore...

the typical self-heating is:

$$0.815mW \times 230^\circ C/W = 0.188^\circ C$$

Equation 2. Real-World Self-Heating Example

Series Resistance

The operation of the MIC281 depends upon sensing the V_{CB-E} of a diode-connected PNP transistor ("diode") at two different current levels. For remote temperature measurements, this is done using an external diode connected between T1 and ground. Since this technique relies upon measuring the relatively small voltage difference resulting from two levels of current through the external diode, any resistance in series with the external diode will cause an error in the temperature reading from the MIC281. A good rule of thumb is this: for each ohm in series with the external transistor, there will be a 0.9°C error in the MIC281's temperature measurement. It is not difficult to keep the series resistance well below an ohm (typically < 0.1Ω), so this will rarely be an issue.

Filter Capacitor Selection

It is usually desirable to employ a filter capacitor between the T1 and GND pins of the MIC281. The use of this capacitor is recommended in environments with a lot of high frequency noise (such as digital switching noise), or if long traces or wires are used to connect to the remote diode. The recommended total capacitance from the T1 pin to GND is 2200pF. If the remote diode is to be at a distance of more than 6"-12" from the MIC281, using twisted pair wiring or shielded microphone cable for the connections to the diode can significantly reduce noise pickup. If using a long run of shielded cable, remember to subtract the cable's conductor-to-shield capacitance from the 2200pF total capacitance.

Layout Considerations

The following guidelines should be kept in mind when designing and laying out circuits using the MIC281:

1. Place the MIC281 as close to the remote diode as possible, while taking care to avoid severe noise sources such as high frequency power transformers, CRTs, memory and data busses, etc.
2. Since any conductance from the various voltages on the PC board and the T1 line can induce serious errors, it is good practice to guard the remote diode's emitter trace with a pair of ground traces. These ground traces should be returned to the MIC281's own ground pin. They should not be grounded at any other part of their run. However, it is highly desirable to use these guard traces to carry the diode's own ground return back to the ground pin of the MIC281, thereby providing a Kelvin connection for the base of the diode. See Figure 3.
3. When using the MIC281 to sense the temperature of a processor or other device which has an integral thermal diode, e.g., Intel's Pentium III, connect the emitter and base of the remote sensor to the MIC281 using the guard traces and Kelvin return shown in Figure 3. The collector of the remote diode is typically inaccessible to the user on these devices.
4. Due to the small currents involved in the measurement of the remote diode's ΔV_{BE} , it is important to adequately clean the PC board after soldering to prevent current leakage. This is most likely to show up as an issue in situations where water-soluble soldering fluxes are used.
5. In general, wider traces for the ground and T1 lines will help reduce susceptibility to radiated noise (wider traces are less inductive). Use trace widths and spacing of 10mm wherever possible and provide a ground plane under the MIC281 and under the connections from the MIC281 to the remote diode. This will help guard against stray noise pickup.
6. Always place a good quality power supply bypass capacitor directly adjacent to, or underneath, the MIC281. This should be a 0.1 μ F ceramic capacitor. Surface mount parts provide the best bypassing because of their low inductance.


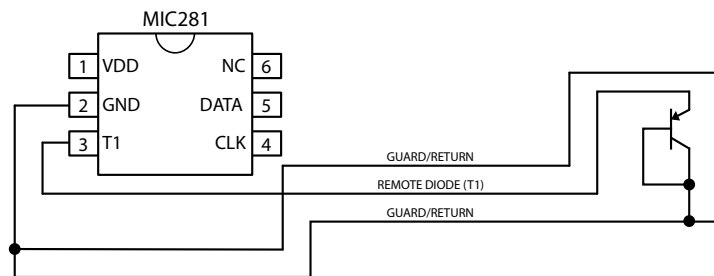


Figure 3. Guard Traces/Kelvin Ground Returns

Package Information

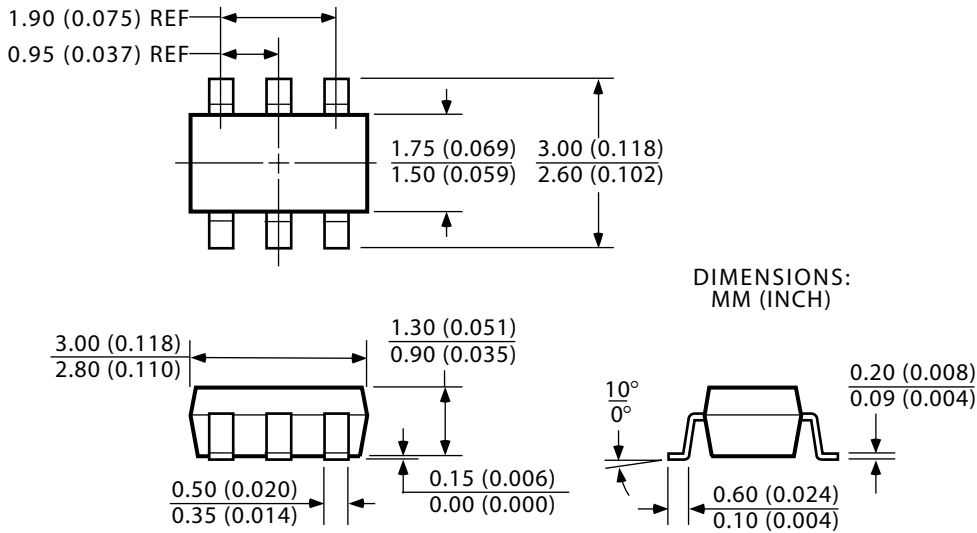

6-Lead SOT23 (M6)

MICREL INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
 TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

This information furnished by Micrel in this data sheet is believed to be accurate and reliable. However no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2004 Micrel Incorporated