


FRONT VIEW - FEMALE INSERT


4 POLE



- 1 BROWN
- 2 WHITE
- 3 BLUE
- 4 BLACK
- 5 NOT USED

FRONT VIEW - MALE INSERT

4 POLE




- 1 BROWN
- 2 WHITE
- 3 BLUE
- 4 BLACK

P/N: 884030K05MXXX

FINISHED LENGTH

- M003 = 0.3M
- M020 = 2M
- M050 = 5M
- M100 = 10M

FINISHED LENGTH

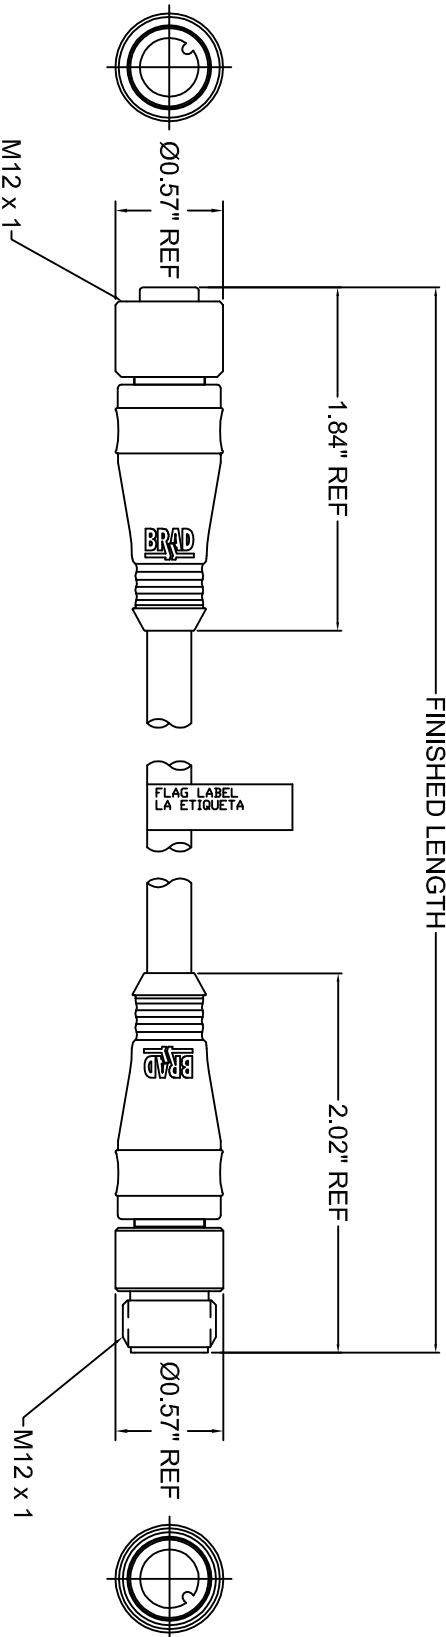

REFERENCE
USE ONLY

SPECS:
OVERMOLD: YELLOW TPE
COUPLING NUT: NICKEL-PLATED BRASS W/ TEFLON COAT
CABLE: #22-4 YELLOW TPE (O.D: Ø0.21" ±0.005")
ELECTRICAL: 250V AC/DC, 4A

GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH
4 PLACES		mm		mm		mm		mm	
3 PLACES		mm		mm		mm		mm	
2 PLACES		mm		mm		mm		mm	
1 PLACE		mm		mm		mm		mm	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWN BY: RB		DATE: ---		TITLE: BRAD CONNECTIVITY MICRO-CHANGE M12 4POLE FEMALE ST / MALE ST		DOCUMENT: MOLEX INCORPORATED	
MATERIAL NO.: 884030K05MXXX		CHECKED BY: ---		DATE: ---		SIZE: C		SHEET NO.: 1 OF 1	
APPROVED BY: ---		DATE: ---		DATE: ---		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			