

## Single Synchronous Buck Regulators with Integrated FET

The ISL6410, ISL6410A are synchronous current-mode PWM regulators designed to provide a total DC-DC solution for microcontrollers, microprocessors, CPLDs, FPGAs, core processors/BBP/MAC, and ASICs. The ISL6410 should be selected for applications using  $3.3V \pm 10\%$  as an input voltage and the ISL6410A in applications requiring  $5.0V \pm 10\%$ .

These synchronous current mode PWM regulators have integrated N- and P-Channel power MOSFETs and provide pre-set pin programmable outputs. Synchronous rectification with internal MOSFETs is used to achieve higher efficiency and a reduced external component count. The operating frequency of 750kHz typical allows the use of small inductor and capacitor values. The device can be synchronized to an external clock signal in the range of 500kHz to 1MHz. A power good signal "PG" is generated when the output voltage falls outside the regulation limits. Other features include overcurrent protection and thermal overload shutdown. The ISL6410, ISL6410A are available in an MSOP 10 lead package.

## Ordering Information

| PART NUMBER*       | TEMP. RANGE (°C) | PACKAGE                 | PKG. DWG. # |
|--------------------|------------------|-------------------------|-------------|
| ISL6410IR          | -40 to 85        | 16 Ld 4x4 QFN           | L16.4x4     |
| ISL6410IRZ (Note)  | -40 to 85        | 16 Ld 4x4 QFN (Pb-free) | L16.4x4     |
| ISL6410IU          | -40 to 85        | 10 Ld MSOP              | M10.118     |
| ISL6410IUZ (Note)  | -40 to 85        | 10 Ld MSOP (Pb-free)    | M10.118     |
| ISL6410AIR         | -40 to 85        | 16 Ld 4x4 QFN           | L16.4x4     |
| ISL6410AIRZ (Note) | -40 to 85        | 16 Ld 4x4 QFN (Pb-free) | L16.4x4     |
| ISL6410AIU         | -40 to 85        | 10 Ld MSOP              | M10.118     |
| ISL6410AIUZ (Note) | -40 to 85        | 10 Ld MSOP (Pb-free)    | M10.118     |

\*For tape and reel, add "-T", "-TK" or "-T5K" suffix.

NOTE: Intersil Pb-free products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which is compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J Std-020B.


## Features

- Fully Integrated Synchronous Buck Regulator
- PWM Fixed Output Voltage Options
  - 1.8V, 1.5V or 1.2V with ISL6410 ( $V_{IN} = 3.3V$ )
  - 3.3V, 1.8V or 1.2V with ISL6410A ( $V_{IN} = 5.0V$ )
- Continuous Output Current . . . . . 600mA
- Ultra-Compact DC-DC Converter Design
- Stable with Small Ceramic Output Capacitors
- High Conversion Efficiency
- Extensive Circuit Protection and Monitoring features
  - Overvoltage, UVLO
  - Overcurrent
  - Thermal Shutdown
- Available in MSOP and QFN packages
- QFN Package:
  - Compliant to JEDEC PUB95 MO-220
  - QFN - Quad Flat No Leads - Package Outline
  - Near Chip Scale Package footprint, which improves PCB efficiency and has a thinner profile
- Pb-Free Packaging Available


## Applications

- CPUs, DSP, CPLDs, FPGAs
- ASICs
- DVD and DSL applications
- WLAN Cards
- Generic 5V to 3.3V Conversion

## Pinouts

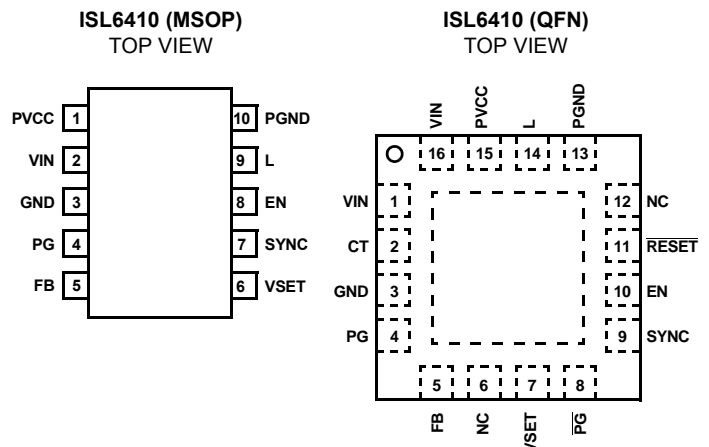


## Functional Block Diagram for MSOP Version

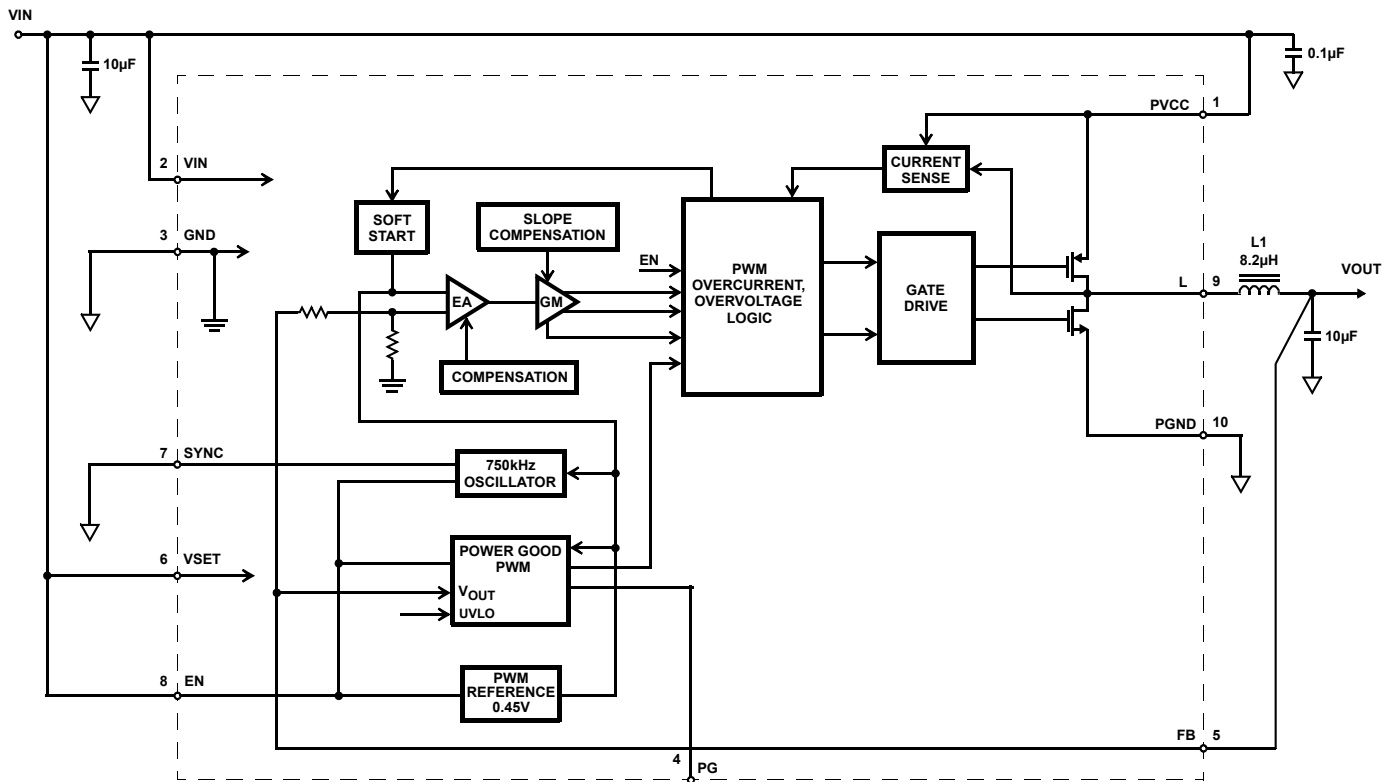

### NOTES:

1. VIN is 3.3V for ISL6410 and 5.0V for ISL6410A.
2. VSET in the above schematic is connected to VIN, so the VOUT is 1.8V for ISL6410 and 3.3V for ISL6410A.

## Functional Block Diagram for QFN Version

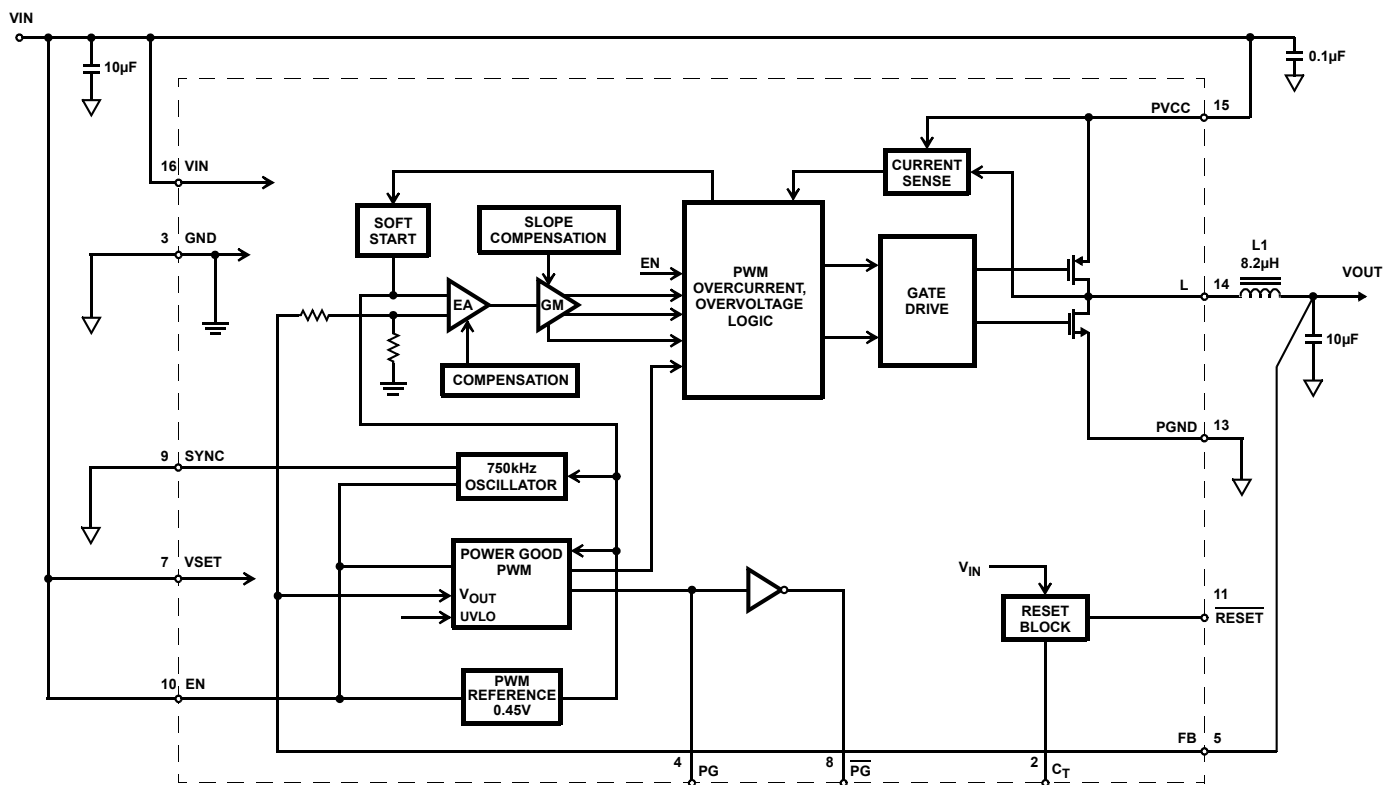

### NOTES:

- VIN is 3.3V for ISL6410 and 5.0V for ISL6410A.
- VSET in the above schematic is connected to VIN, so the VOUT is 1.8V for ISL6410 and 3.3V for ISL6410A.

## Typical Application Schematics

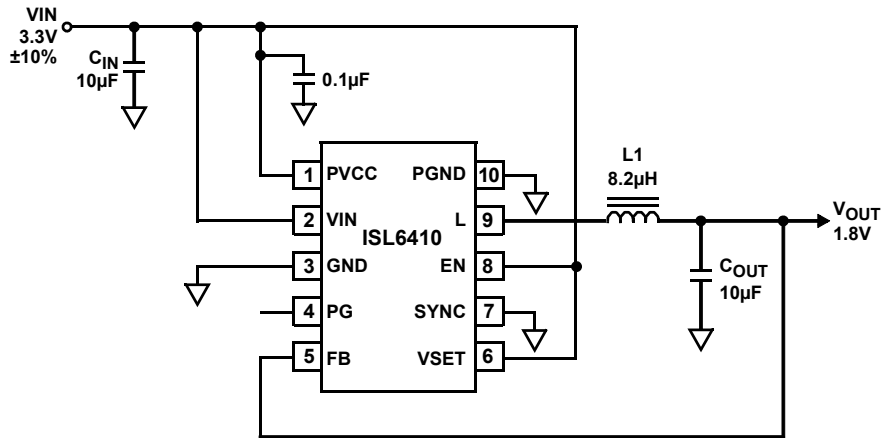


FIGURE 1. SCHEMATIC USING THE ISL6410 MSOP

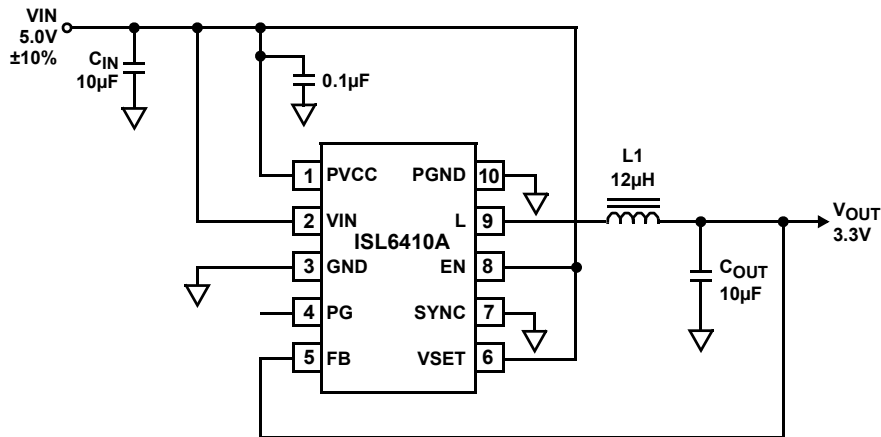


FIGURE 2. SCHEMATIC USING THE ISL6410A MSOP

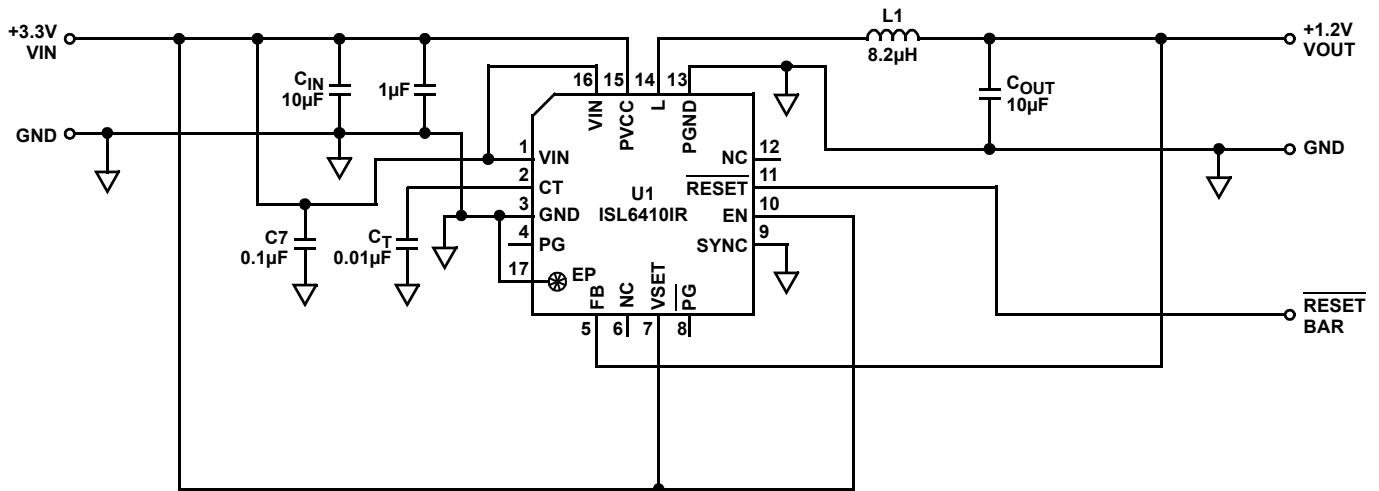


FIGURE 3. SCHEMATIC USING THE ISL6410 QFN

## Absolute Maximum Ratings

Supply Voltage,  $V_{CC}$  ..... -0.3V to +6.0V  
 SYNC, FB, VSET & Enable Input (Note 3) ..... -0.3V to  $V_{CC}+0.3V$   
 ESD Classification (Human Body Model) ..... Class 2

## Thermal Information

Thermal Resistance (Typical)  $\theta_{JA}$  (°C/W)  $\theta_{JC}$  (°C/W)  
 MSOP Package (Note 4) ..... 128 NA  
 QFN Package (Notes 4, 5) ..... 45 7.5  
 Maximum Junction Temperature (Plastic Package) ..... 150°C  
 Maximum Storage Temperature Range ..... -65°C to 150°C  
 Maximum Lead Temperature (10s, soldering) ..... 260°C  
 Ambient Temperature Range ..... -40°C to 85°C  
 Junction Temperature Range ..... -40°C to 125°C

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

### NOTES:

- All voltages are with respect to GND.
- $\theta_{JA}$  is measured in free air with the component mounted on a high effective thermal conductivity test board with "direct attach" features. See Tech Brief TB379.
- For  $\theta_{JC}$ , the "case temp" location is the center of the exposed metal pad on the package underside.

## Electrical Specifications

Recommended operating conditions unless otherwise noted.  $V_{IN} = 3.3V \pm 10\%$  (ISL6410) or  $5V \pm 10\%$  (ISL6410A),  $T_A = 25^\circ C$  (Note 6).

| PARAMETER                             | TEST CONDITIONS  | MIN  | TYP  | MAX  | UNITS      |
|---------------------------------------|--|------|------|------|------------|
| <b><math>V_{CC}</math> SUPPLY</b>     |  |      |      |      |            |
| Supply Voltage Range                  | VIN (ISL6410)  | 3.0  | 3.3  | 3.6  | V          |
|                                       | VIN (ISL6410A)   | 4.5  | 5.0  | 5.5  | V          |
| Input UVLO Threshold                  | $V_{TR}$ (ISL6410) Rising                                    | 2.62 | 2.68 | 2.73 | V          |
|                                       | $V_{TF}$ (ISL6410) Falling                                   | 2.53 | 2.59 | 2.64 | V          |
|                                       | $V_{TR}$ (ISL6410A) Rising                                   | 4.27 | 4.37 | 4.45 | V          |
|                                       | $V_{TF}$ (ISL6410A) Falling                                  | 4.1  | 4.22 | 4.32 | V          |
| Quiescent Supply Current              | $I_{OUT} = 0mA$  | -    | 2.3  | -    | mA         |
| Shutdown Supply Current               | EN = GND, $T_A = 25^\circ C$                                 | -    | 5    | 10   | $\mu A$    |
|                                       | EN = GND, $T_A = 85^\circ C$                                 | -    | 10   | 15   | $\mu A$    |
| Thermal Shutdown Temperature (Note 7) | Rising Threshold   | -    | 150  | -    | $^\circ C$ |
| Thermal Shutdown Hysteresis (Note 7)  |  | -    | 20   | 25   | $^\circ C$ |
| <b>SYNCHRONOUS BUCK PWM REGULATOR</b> |  |      |      |      |            |
| Output Voltage                        | ISL6410, VSET = L  | -    | 1.2  | -    | V          |
|                                       | ISL6410, VSET = H  | -    | 1.8  | -    | V          |
|                                       | ISL6410, VSET = OPEN   | -    | 1.5  | -    | V          |
|                                       | ISL6410A, VSET = L   | -    | 1.2  | -    | V          |
|                                       | ISL6410A, VSET = H   | -    | 3.3  | -    | V          |
|                                       | ISL6410A, VSET = OPEN  | -    | 1.8  | -    | V          |
| Output Voltage Accuracy               | $I_{OUT} = 3mA$ , $T_A = -40^\circ C$ to $85^\circ C$        | -1.5 | -    | +1.5 | %          |
| Line Regulation                       | $I_{OUT} = 3mA$  | -0.5 | -    | +0.5 | %          |
| Load Regulation                       | $I_{OUT} = 3mA$ to 600mA                                     | -1.5 | -    | +1.5 | %          |
| Maximum Output Current                |  | -    | -    | 600  | mA         |
| Peak Output Current Limit             |  | 700  | -    | 1300 | mA         |
| PMOS $r_{DS(ON)}$                     | $I_{OUT} = 200mA$  | -    | 230  | -    | m $\Omega$ |
| NMOS $r_{DS(ON)}$                     | $I_{OUT} = 200mA$  | -    | 230  | -    | m $\Omega$ |
| Efficiency                            | $I_{OUT} = 200mA$ , $V_{IN} = 3.3V$ , $V_O = 1.8V$ (ISL6410) | -    | 92   | -    | %          |

## ISL6410, ISL6410A

**Electrical Specifications** Recommended operating conditions unless otherwise noted.  $V_{IN} = 3.3V \pm 10\%$  (ISL6410) or  $5V \pm 10\%$  (ISL6410A),  $T_A = 25^\circ C$  (Note 6). **(Continued)**

| PARAMETER  | TEST CONDITIONS   | MIN           | TYP        | MAX   | UNITS   |
|--|---|---------------|------------|-------|---------|
| Efficiency   | $I_{OUT} = 200mA$ , $V_{IN} = 5.0V$ , $V_O = 3.3V$ (ISL6410A) | -             | 93         | -     | %       |
| Efficiency   | $I_{OUT} = 600mA$ , $V_{IN} = 5.0V$ , $V_O = 3.3V$ (ISL6410A) | -             | 91         | -     | %       |
| Soft-Start Time  | 4096 Clock Cycles @ 750kHz                                    | -             | 5.5        | -     | ms      |
| <b>OSCILLATOR</b>  |   |               |            |       |         |
| Oscillator Frequency   |   | 620           | 750        | 860   | kHz     |
| Frequency Synchronization Range ( $f_{SYNC}$ )                                     | Clock signal on SYNC pin                                      | 500           | -          | 1000  | kHz     |
| SYNC High Level Input Voltage  | As % of $V_{IN}$  | 70            | -          | -     | %       |
| SYNC Low Level Input Voltage   | As % of $V_{IN}$  | -             | -          | 30    | %       |
| Sync Input Leakage Current   | SYNC = GND or $V_{IN}$  | -1            | -          | 1     | $\mu A$ |
| Duty Cycle of External Clock Signal (Note 7)                                       |   | 20            | -          | 60    | %       |
| <b>PGOOD</b> (ISL6410 interfaces to 3.3V Logic, ISL6410A interfaces to 5.0V Logic) |   |               |            |       |         |
| Rising Threshold   | 1mA minimum source/sink                                       | +5.0          | 8.0        | +10.5 | %       |
| Falling Threshold  |   | -10.5         | -8.0       | -5.0  | %       |
| Rising/Falling Hysteresis  |   | -             | 1          | -     | %       |
| <b>ENABLE</b>  |   |               |            |       |         |
| EN High Level Input Voltage  | As % of $V_{IN}$  | 70            | -          | -     | %       |
| EN Low Level Input Voltage   | As % of $V_{IN}$  | -             | -          | 30    | %       |
| EN Input Leakage Current   | EN = GND or $V_{IN}$  | -1            |            | 1     | $\mu A$ |
| <b>OVERVOLTAGE</b>   |   |               |            |       |         |
| Overvoltage Threshold  |   | 27            | 30         | 33    | %       |
| <b>RESET BLOCK SPECIFICATIONS</b>  |   |               |            |       |         |
| RESET (reset released)   | ISL6410, ISOURCE = 500 $\mu A$ , $V_{IN} = 2.90V$             | $0.8V_{IN}$   | -          | -     | V       |
| RESET (reset asserted)   | ISL6410, ISINK = 1.2mA, $V_{IN} = 2.50V$                      | -             | -          | 0.3   | V       |
| RESET Rising Threshold   | ISL6410   | 2.74          | 2.78       | 2.81  | V       |
| RESET Falling Threshold  | ISL6410   | 2.72          | 2.77       | 2.79  | V       |
| RESET (reset released)   | ISL6410A, ISOURCE = 800 $\mu A$ , $V_{IN} = 4.70V$            | $0.8V_{IN}$   | -          | -     | V       |
| RESET (reset asserted)   | ISL6410A, ISINK = 3.2mA, $V_{IN} = 4.10V$                     | -             | -          | 0.4   | V       |
| RESET Rising Threshold   | ISL6410A  | 4.5           | 4.58       | 4.64  | V       |
| RESET Falling Threshold  | ISL6410A  | 4.47          | 4.55       | 4.61  | V       |
| RESET Threshold Hysteresis   | ISL6410   | -             | 20         | -     | mV      |
| RESET Threshold Hysteresis   | ISL6410A  | -             | 30         | -     | mV      |
| RESET Active Timeout Period (Note 8)   | $C_T = 0.01mF$  | -             | 25         | -     | ms      |
| <b>VSET</b>  |   |               |            |       |         |
| $V_{SET}$ High Level Input   |   | $V_{IN}-0.4V$ | -          | -     | V       |
| $V_{SET}$ Low Level Input  |   | -             | -          | 0.4   | V       |
| $V_{SET}$ Open Level Input   |   | -             | $V_{IN}/2$ | -     | V       |

**NOTES:**

- Specifications at  $-40^\circ C$  and  $+85^\circ C$  are guaranteed by design, not production tested.
- Guaranteed by design, not production tested.
- The RESET Timeout period is linear with  $C_T$  at a slope of 2.5ms/nF, thus a 10nF capacitor provides for 25ms.

## Pin Description

**VIN** - Supply voltage for the IC. It is recommended to place a 1µF decoupling capacitor as close as possible to the IC.

**GND** - Small signal ground for the PWM controller stage. All internal control circuits are referenced to this pin.

**PG** - The Power good is an open-drain output. A pull-up resistor should be connected between PG and VIN. It is asserted active high when the output voltage reaches 94.5% of the nominal value.

**FB** - The Feedback pin is used to sense the output voltage, and should be connected to VOUT for normal operation.

**VSET** - This pin is used to program the output voltages. Refer to Table 1 below for details.

TABLE 1.

| VSET      | ISL6410<br>Vo | ISL6410A<br>Vo |
|-----------|---------------|----------------|
| High      | 1.8V          | 3.3V           |
| Open (NC) | 1.5V          | 1.8V           |
| Low       | 1.2V          | 1.2V           |

**SYNC** - This pin is used for synchronization. The converter switching frequency can be synchronized to an external CMOS clock signal in the range of (500kHz to 1MHz).

**EN** - A logic high enables the converter, logic low forces the device into shutdown mode reducing the supply current to less than 10µA at 25°C. This pin should be pulled up to VCC via a 10K resistor.

**L** - This pin is the drain junction of the internal power MOSFETs and is to be connected to the external inductor.

**PGND** - Power ground. Connect all power grounds to this pin.

**PVCC** - This pin provides the Input supply for the internal MOSFETs. It is recommended to place a 1µF decoupling capacitor as close as possible to the IC.

**CT** - Timing capacitor connection to set the 25ms minimum pulse width for the  $\overline{\text{RESET}}$  signal.

**$\overline{\text{RESET}}$**  - The outputs of the reset supervisory circuit, which monitors VIN. The IC asserts these  $\overline{\text{RESET}}$  signals whenever the supply voltage drops below a preset threshold and keeps it asserted for at least 25ms after VCC (VIN) has risen above the reset threshold. These outputs are push-pull.  $\overline{\text{RESET}}$  is LOW when re-setting the microprocessor. The PWM will continue to operate until VIN drops below the UVLO threshold.

## Functional Description

The ISL6410, ISL6410A is a synchronous buck regulator with integrated N- and P-channel power MOSFET and provides pre-set pin programmable outputs. Synchronous rectification with internal MOSFETs is used to achieve higher

efficiency and reduced number of external components. Operating frequency of 750kHz typical allows the use of small inductor and capacitor values. The device can be synchronized to an external clock signal in the range of 500kHz to 1MHz. The PG output indicates loss of regulation on PWM output.

The PWM is based on the peak current mode control topology with internal slope compensation. At the beginning of each clock cycle, the high side P-channel MOSFET is turned on. The current in the inductor ramps up and is sensed via an internal circuit. On exceeding a preset limit the high side switch is turned off causing the PWM comparator to trip. This occurs whenever the output voltage is in regulation or when the inductor current reaches the current limit. After a minimum dead time to prevent shoot through current, the low side N-channel MOSFET turns on and the current ramps down. As the clock cycle is completed, the low side switch turns off and the next clock cycle is initiated.

The control loop is internally compensated thus reducing the amount of external components.

The switch current is internally sensed and the maximum current limit is 1300mA peak.

## Synchronization

The typical operating frequency for the converter is 750kHz. It is possible to synchronize the converter to an external clock frequency in the range of 500kHz to 1000kHz when an external signal is applied to SYNC pin. The device will automatically detect and synchronize to the rising edge of the first clock pulse. If the clock signal is stopped, the converter automatically switches back to the internal clock and continues its operation without interruption. The switch over will be initiated if no rising edge triggers are present on the SYNC pin for a duration of four clock cycles.

## Soft-Start

As the EN (Enable) pin goes high, the soft-start function will generate an internal voltage ramp. This causes the start-up current to slowly rise preventing output voltage overshoot and high inrush currents. The soft-start duration is typically 5.5ms with 750kHz switching frequency. When the soft-start is completed, the error amplifier will be connected directly to the internal voltage reference.

## Enable

Logic low on EN pin forces the PWM section into shutdown. In the shutdown mode all the major blocks of the PWM including power switches, drivers, voltage reference, and oscillator are turned off.

## Undervoltage Lockout

An undervoltage lockout circuit prevents the converter from turning on when the voltage on VIN is less than the values specified in the Input UVLO Threshold section of the electrical specification.

### Power Good

This output is asserted high when the PWM is enabled, and Vout is within 8.0% typical of its final value, and is active low outside this range. When disabled, the output turns active low. It is recommended to leave the PG pin unconnected when not used.

### PWM Overvoltage and Overcurrent Protection

The PWM output current is sampled at the end of each PWM cycle, exceeding the overcurrent limit, causes a 4 bit up/down counter to increment by one LSB. A normal current state causes the counter to decrement by one LSB (the counter will not however "rollover" or count below 0000). When the PWM goes into overcurrent, the counter rapidly reaches count 1111 and the PWM output is shut down and the soft-start counter is reset. After 16 clocks the PWM output is enabled and the soft-start cycle is started.

If Vout exceeds the overvoltage limit for 32 consecutive clock cycles the PWM output is shut off and the soft-start cycle is initiated.

### No Load Operation

If there is no load connected to the output, the converter will regulate the output voltage by allowing the inductor current to reverse for a short period of time.

### Output Capacitor Selection

For best performance, a low ESR output capacitor is needed. Output voltages below 1.8V require a larger output capacitor and ESR value to improve the performance and stability of the converter. For 1.8V output applications, a ceramic capacitor of 10μF or higher value with ESR ≤50mΩ is recommended.

The RMS ripple current is calculated as:

$$I_{RMS(CO)} = V_o \times \frac{1 - \frac{V_o}{V_{in}}}{L \times f} \times \frac{1}{2 \times \sqrt{3}}$$

L = the inductor value

f = the switching frequency

The overall output ripple voltage is the sum of the voltage spike caused by the output capacitor ESR and the voltage ripple caused by charge and discharge of the output capacitor:

$$\Delta V_o = V_o \times \frac{1 - \frac{V_o}{V_{in}}}{L \times f} \times \left( \frac{1}{8 \times C_o \times f} + ESR \right)$$

Where the highest output voltage ripple occurs at the highest input voltage VIN.

TABLE 2. RECOMMENDED OUTPUT CAPACITORS

| CAPACITOR VALUE | ESR (mΩ) | COMPONENT SUPPLIER | COMMENTS |
|-----------------|----------|--------------------|----------|
| 10μF            | <50      | AVX 08056D106KAT2A | Ceramic  |

### Input Capacitor Selection

The input current to the buck converter is pulsed, and therefore a low ESR input capacitor is required. This results in good input voltage filtering and minimizes the interference it causes to other circuits. The input capacitor should have a minimum value of 10μF and a higher value can be selected for improving input voltage filtering. The input capacitor should be rated for the maximum input ripple current calculated as:

$$I_{RMS} = I_o(\max) \times \sqrt{\frac{V_o}{V_{in}} \times \left( 1 - \frac{V_o}{V_{in}} \right)}$$

The worst case RMS ripple current occurs at D = 0.5 and is calculated as: Irms = Io/2.

D = Duty Cycle

Ceramic capacitors are preferred because of their low ESR value. They are also less sensitive to voltage transients when compared to tantalum capacitors. It is good practice to place the input capacitor as close as possible to the input pin of the IC for optimum performance.

### Inductor Selection

The ISL6410 is an internally compensated device and hence a minimum of 8.2μH must be used for the ISL6410 and a minimum of 12μH for the ISL6410A. The selected inductor must have a low DC resistance and a saturation current greater than the maximum inductor current value can be calculated from the equations below

$$dIL = V_o \times \frac{1 - \frac{V_o}{V_{in}}}{L \times f}$$

$$I_{L\max} = I_o \max + \frac{dIL}{2}$$

where

dIL = the peak to peak inductor current

L = the inductor value

f = the switching frequency

ILmax = the max inductor current

TABLE 3. RECOMMENDED INDUCTORS

| INDUCTOR VALUE | DCR (mΩ) | COMPONENT SUPPLIER         |
|----------------|----------|----------------------------|
| 8.2μH          | 75       | Coilcraft<br>MSS6122-822MX |
| 12μH           | 100      | Coilcraft<br>MSS6122-123MX |



## Layout Considerations

As in all switching power supplies, the layout is an important step in the design process, more so at high peak currents and switching frequencies. Improper layout practice will give rise to Stability and EMI issues. It is recommended that wide and short traces are used for the main current paths. The

input capacitor should be placed as close as possible to the IC pins. This applies to the output inductor and capacitor as well. The analog ground, GND, and the power ground, PGND, need to be separated. Use a common ground node to minimize the effects of ground noise.

## Performance Curves and Waveforms

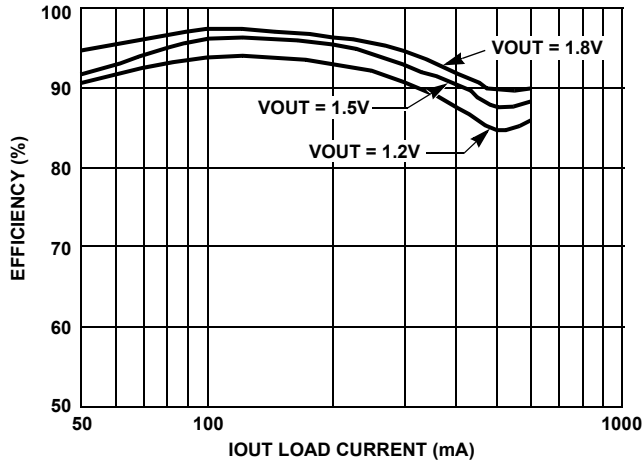


FIGURE 4. ISL6410 EFFICIENCY vs LOAD CURRENT

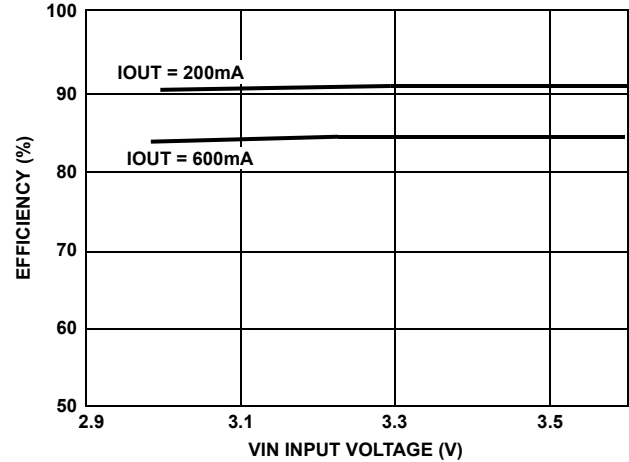


FIGURE 5. ISL6410 VIN vs EFFICIENCY

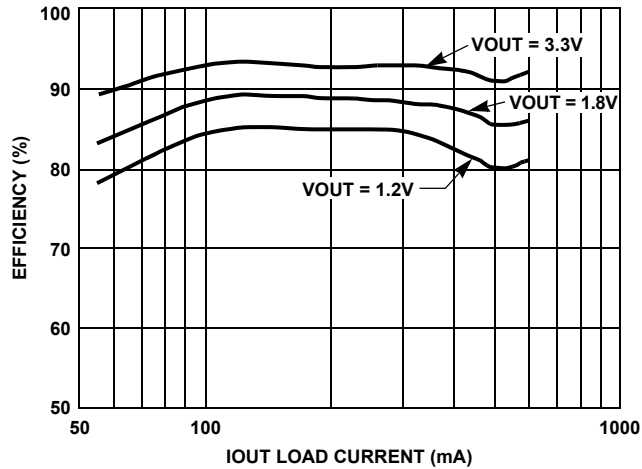


FIGURE 6. ISL6410A EFFICIENCY vs LOAD CURRENT

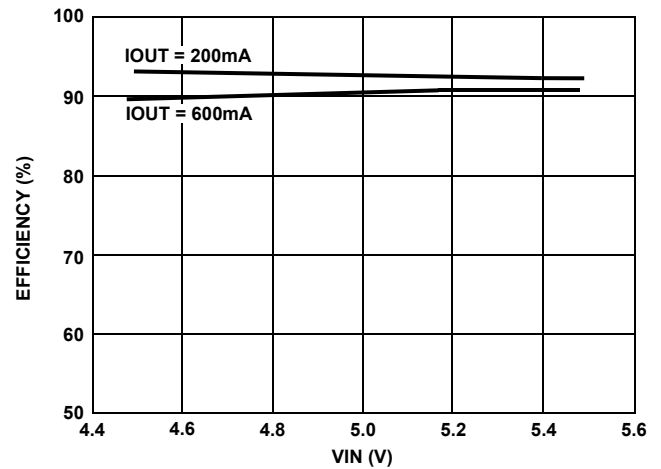


FIGURE 7. ISL6410A EFFICIENCY vs VIN

## Performance Curves and Waveforms (Continued)

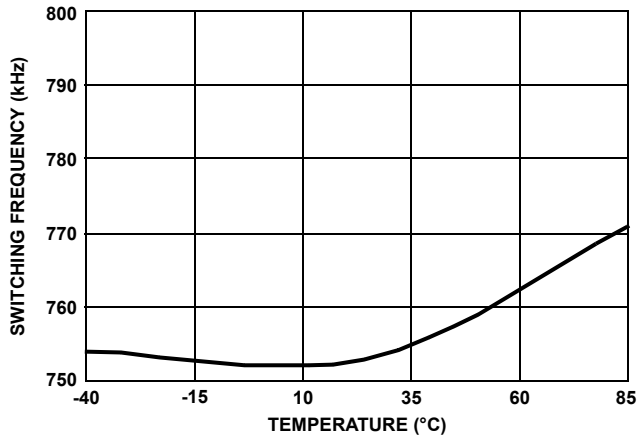


FIGURE 8. ISL6410 OSCILLATOR FREQUENCY vs TEMPERATURE

CH1 = Top, CH2 = Middle, CH4 = Bottom, where applicable

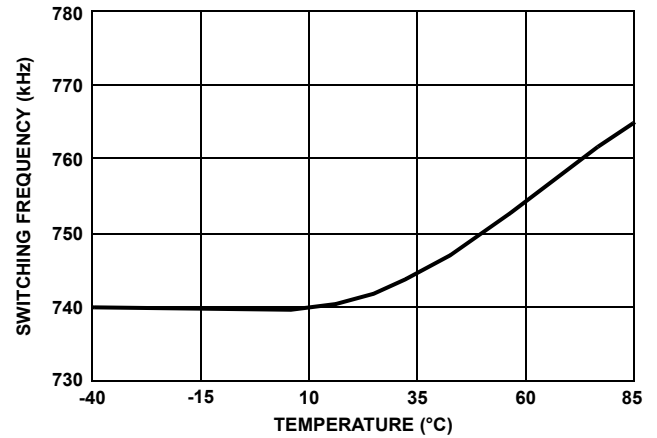


FIGURE 9. ISL6410A OSCILLATOR FREQUENCY vs TEMPERATURE

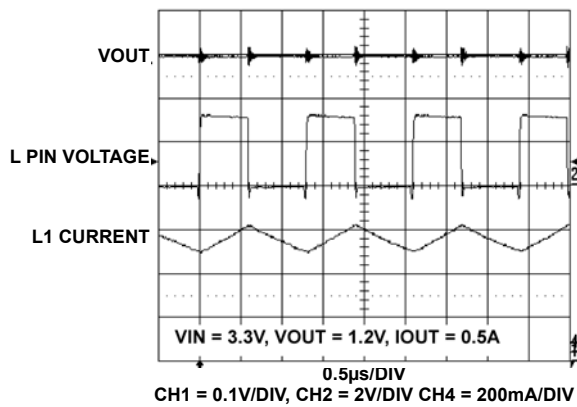


FIGURE 10. SWITCHING WAVEFORM FOR ISL6410

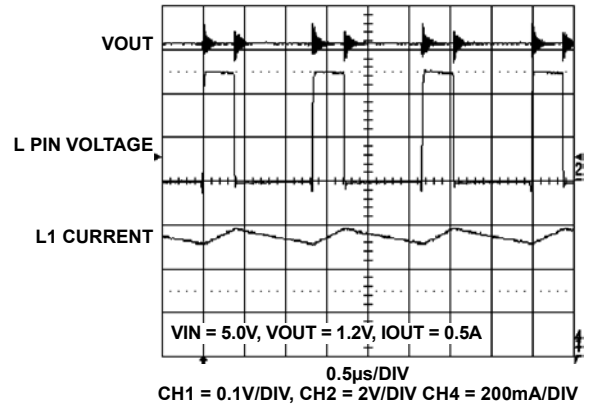


FIGURE 11. SWITCHING WAVEFORM FOR ISL6410A

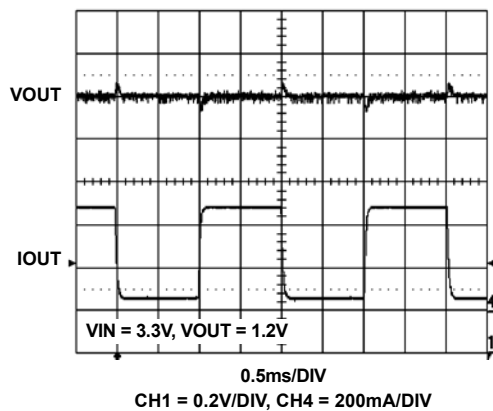


FIGURE 12. TRANSIENT LOAD WAVEFORM FOR ISL6410

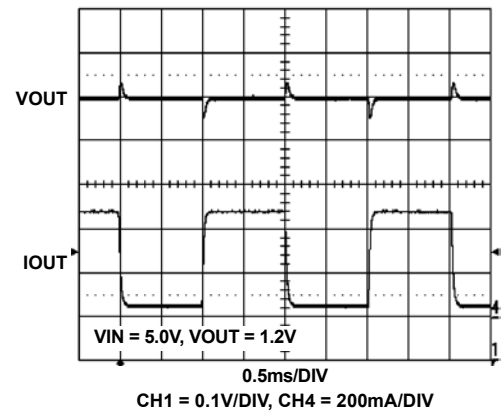


FIGURE 13. TRANSIENT LOAD WAVEFORM FOR ISL6410A

Performance Curves and Waveforms (Continued)

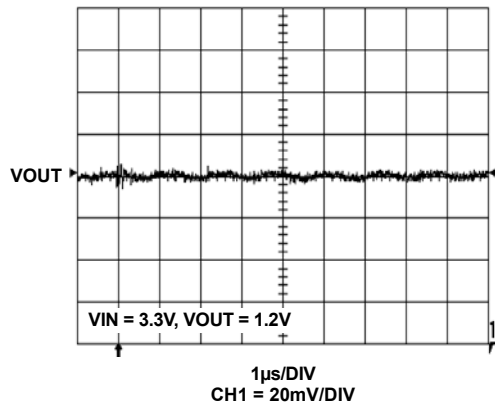


FIGURE 14. RIPPLE WAVEFORM FOR ISL6410

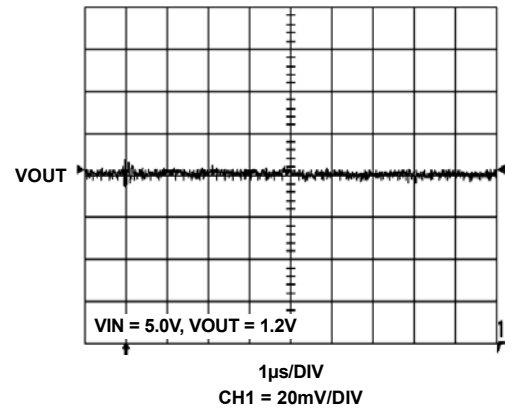


FIGURE 15. RIPPLE WAVEFORM FOR ISL6410A

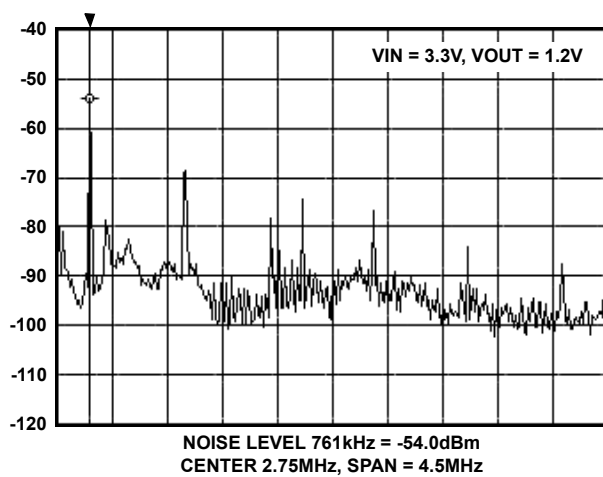


FIGURE 16. SWITCHING HARMONICS AND NOISE FOR ISL6410


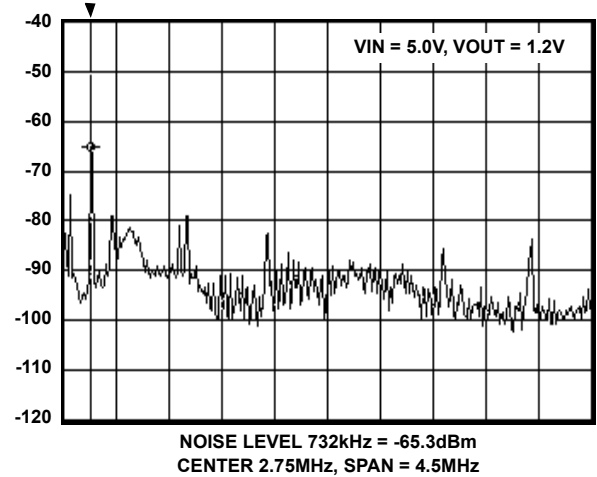


FIGURE 17. SWITCHING HARMONICS AND NOISE FOR ISL6410A



# Mini Small Outline Plastic Packages (MSOP)

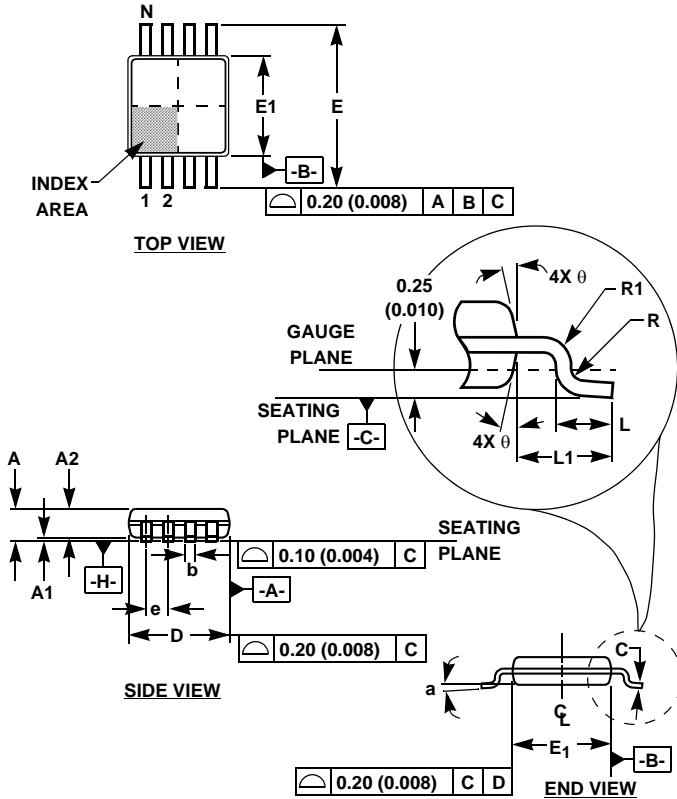

## M10.118 (JEDEC MO-187BA) 10 LEAD MINI SMALL OUTLINE PLASTIC PACKAGE

| SYMBOL   | INCHES    |       | MILLIMETERS |      | NOTES |
|----------|-----------|-------|-------------|------|-------|
|          | MIN       | MAX   | MIN         | MAX  |       |
| A        | 0.037     | 0.043 | 0.94        | 1.10 | -     |
| A1       | 0.002     | 0.006 | 0.05        | 0.15 | -     |
| A2       | 0.030     | 0.037 | 0.75        | 0.95 | -     |
| b        | 0.007     | 0.011 | 0.18        | 0.27 | 9     |
| c        | 0.004     | 0.008 | 0.09        | 0.20 | -     |
| D        | 0.116     | 0.120 | 2.95        | 3.05 | 3     |
| E1       | 0.116     | 0.120 | 2.95        | 3.05 | 4     |
| e        | 0.020 BSC |       | 0.50 BSC    |      | -     |
| E        | 0.187     | 0.199 | 4.75        | 5.05 | -     |
| L        | 0.016     | 0.028 | 0.40        | 0.70 | 6     |
| L1       | 0.037 REF |       | 0.95 REF    |      | -     |
| N        | 10        |       | 10          |      | 7     |
| R        | 0.003     | -     | 0.07        | -    | -     |
| R1       | 0.003     | -     | 0.07        | -    | -     |
| $\theta$ | 5°        | 15°   | 5°          | 15°  | -     |
| $\alpha$ | 0°        | 6°    | 0°          | 6°   | -     |

Rev. 0 12/02

### NOTES:

- These package dimensions are within allowable dimensions of JEDEC MO-187BA.
- Dimensioning and tolerancing per ANSI Y14.5M-1994.
- Dimension "D" does not include mold flash, protrusions or gate burrs and are measured at Datum Plane. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
- Dimension "E1" does not include interlead flash or protrusions and are measured at Datum Plane.  $\square$ -H- Interlead flash and protrusions shall not exceed 0.15mm (0.006 inch) per side.
- Formed leads shall be planar with respect to one another within 0.10mm (.004) at seating Plane.
- "L" is the length of terminal for soldering to a substrate.
- "N" is the number of terminal positions.
- Terminal numbers are shown for reference only.
- Dimension "b" does not include dambar protrusion. Allowable dambar protrusion shall be 0.08mm (0.003 inch) total in excess of "b" dimension at maximum material condition. Minimum space between protrusion and adjacent lead is 0.07mm (0.0027 inch).
- Datums  $\square$ -A- and  $\square$ -B- to be determined at Datum plane  $\square$ -H-.
- Controlling dimension: MILLIMETER. Converted inch dimensions are for reference only.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)