
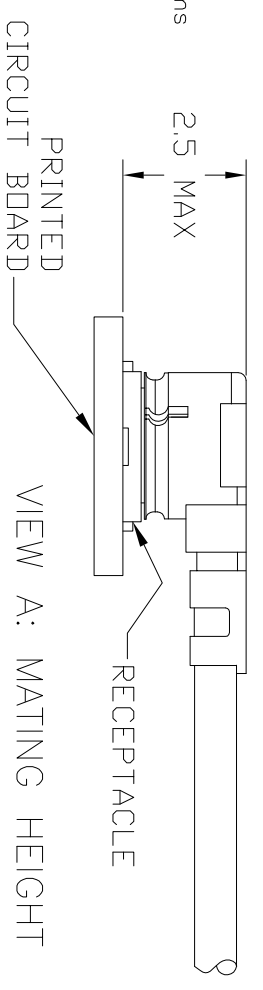


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	HT	DIST	LOC	DATE	DMN	APVD
0	OO			28APR05	HXF	DF

REV	DESCRIPTION	DATE	DMN	APVD
0			28APR05	HXF

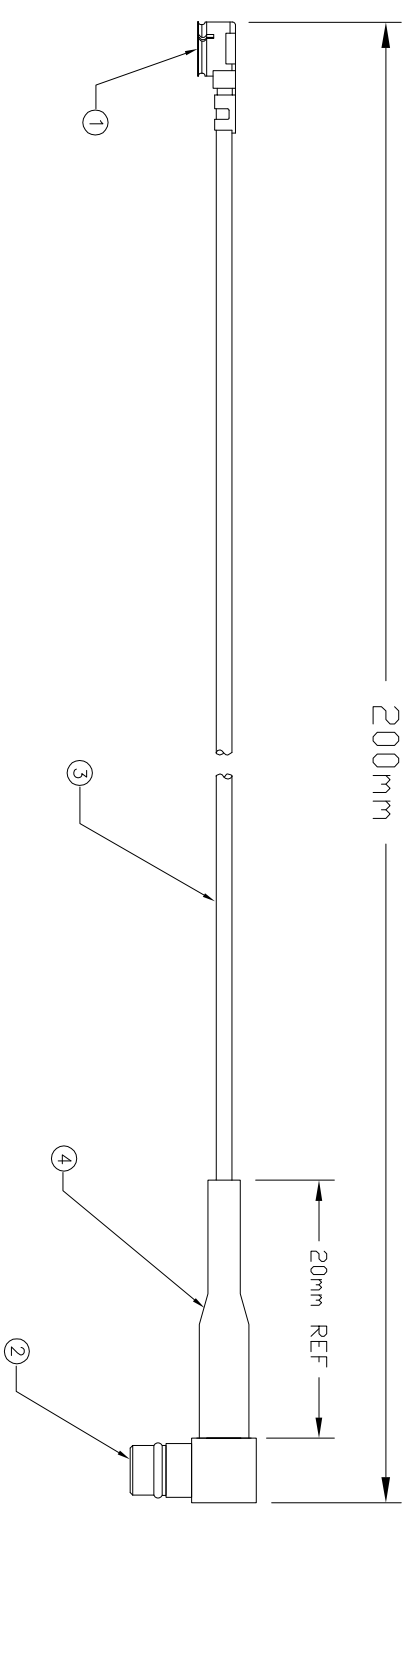

NOTES:

1. HIROSE COMPATIBLE
2. 100% ELECTRICAL TESTING FOR: CONTINUITY AND SHORTS. HI-POT AT 150 VDC FOR 100ms
FREQUENCY RANGE: DC TO 6 GHz
VSWR 1.4:1 MAX
3. PRODUCT RATINGS:
TEMPERATURE: -40 TO +90 DEG.C
VOLTAGE: 60 VAC
CHARACTERISTIC IMPEDANCE: 50 OHMS
UMCC MATING DURABILITY: 50 CYCLES
MMCX MATING DURABILITY: 500 CYCLES

QTY	UNIT	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	4
1	AR	MINIATURE COAX CABLE, 1.37mm OD	3
1	PC	MMCX R/A PLUG FOR 1.37 OD CABLE	2
1	PC	UMCC TYPE III PLUG	1

THIS DRAWING IS A CONTROLLED DOCUMENT.
 DIMENSIONS: MM
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ±
 1 PLC ±
 2 PLC ±
 3 PLC ±
 4 PLC ±
 ANGLES ±

DMN HAO Xiangfeng
 CHK PAUL Zhou
 APVD DENVER WILSON
 PRODUCT SPEC
 APPLICATION SPEC
 WEIGHT
 NAME Tyco Electronics Corporation
 KunShan, CHINA 215321

SIZE A4
 CAGE CODE 00779
 DRAWING NO 1-1750110-0
 SCALE 1:1
 SHEET 1 of 1
 REV 0