

**SPECIFICATION** 




#### Features:


- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in constant current limiting circuit
- 1U low profile 41mm
- Built-in cooling fan ON-OFF control
- Built-in DC OK signal
- Built-in remote sense function
- 5 years warranty



MODEL		HRP-300-3.3	HRP-300-5	HRP-300-7.5	HRP-300-12	HRP-300-15	HRP-300-24	HRP-300-36	HRP-300-48
	DC VOLTAGE	3.3V	5V	7.5V	12V	15V	24V	36V	48V
	RATED CURRENT	60A	60A	40A	27A	22A	14A	9A	7A
	CURRENT RANGE	0 ~ 60A	0 ~ 60A	0 ~ 40A	0 ~ 27A	0 ~ 22A	0 ~ 14A	0 ~ 9A	0 ~ 7A
	RATED POWER	198W	300W	300W	324W	330W	336W	324W	336W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	90mVp-p	100mVp-p	120mVp-p	150mVp-p	150mVp-p	250mVp-p	250mVp-p
OUTPUT	VOLTAGE ADJ. RANGE	2.8 ~ 3.8V	4.3 ~ 5.8V	6.8 ~ 9V	10.2 ~ 13.8V	13.5 ~ 18V	21.6 ~ 28.8V	28.8 ~ 39.6V	40.8 ~ 55.2\
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.3%	±0.3%	±0.2%	±0.2%	±0.2%
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	1000ms, 50ms/230VAC 2500ms, 50ms/115VAC at full load							
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load							
	VOLTAGE RANGE Note.5	85 ~ 264VAC	120 ~ 370VI	DC					
	FREQUENCY RANGE	47 ~ 63Hz							
	POWER FACTOR (Typ.)	PF>0.95/230V	AC PF>0.9	9/115VAC at ful	lload				
INPUT	EFFICIENCY (Typ.)	80%	82%	86%	88%	88%	87%	88%	89%
	AC CURRENT (Typ.)	5A/115VAC	2.5A/230VAC						
	INRUSH CURRENT (Typ.)	35A/115VAC 70A/230VAC							
	LEAKAGE CURRENT	<1.2mA/240VAC							
	OVERLOAD	105 ~ 135% rated output power							
	OVERLOAD	Protection type	: Constant curr	ent limiting, rec	overs automatic	ally after fault c	ondition is remo	ved	
	OVER VOLTAGE	3.96 ~ 4.62V	6 ~ 7V	9.4 ~ 10.9V	14.4 ~ 16.8V	18.8 ~ 21.8V	30 ~ 34.8V	41.4 ~ 48.6V	57.6 ~ 67.2
PROTECTION	OVER VOLIAGE	Protection type	: Shut down o/p	p voltage, re-pov	wer on to recove	r			
		90°C ±5°C (TSW1: detect on heatsink of power transistor)							
	OVER TEMPERATURE	$100^{\circ}\!$							
		Protection type: Shut down o/p voltage, recovers automatically after temperature goes down							
FUNCTION	DC OK SIGNAL	PSU turns on :	3.3 ~ 5.6V ; PSL	J turns off : 0 ~ 1	V				
FUNCTION	FAN CONTROL (Typ.)	Load 35±15% or RTH2 ≥50°C Fan on							
	WORKING TEMP.	-40 ~ +70°C (R	efer to output lo	ad derating curv	/e)				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing							
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)							
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes							
	SAFETY STANDARDS	UL60950-1, TU	JV EN60950-1 a	pproved					
CAFFTVO	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC							
SAFETY &	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH							
EMC (Note 4)	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B							
(	HARMONIC CURRENT	Compliance to	EN61000-3-2,-	3					
	EMS IMMUNITY	Compliance to	EN61000-4-2,3	,4,5,6,8,11, EN	V50204, EN550	24, EN61000-6-	2, heavy industr	y level, criteria	Α
OTHERS	MTBF	176K hrs min.	MIL-HDBK-2	17F (25°ℂ)					
	DIMENSION	199*105*41mm (L*W*H)							
	PACKING	0.95Kg;15pcs/1	5.3Kg/0.69CUF	Т					
NOTE	Ripple & noise are measure     Tolerance: includes set up     The power supply is consid     EMC directives. For guidan     (as available on http://www.	I parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  I parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  I pole & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  I power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets measured at component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets measured in the confirmed of component power supplies."  I savailable on http://www.meanwell.com)  I savailable on http://www.meanwell.com)  I savailable on http://www.meanwell.com)							
	·	-						File Name:HRP-30	0_SPEC 2010_1





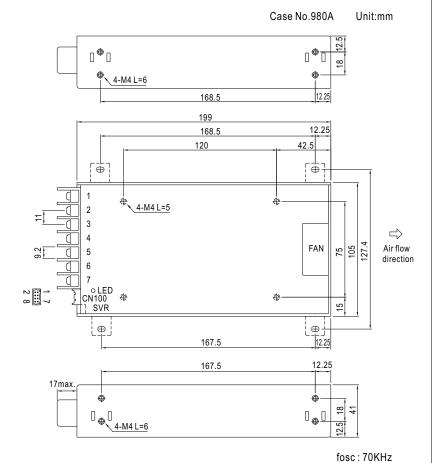


### Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4,5	DC OUTPUT -V
2	AC/N	6,7	DC OUTPUT +V
3	FG ≟		


# Connector Pin No. Assignment (CN100): HRS DF11-08DP-2DS or equivalent


Pin No.	Assignment	Mating Housing	Terminal		
1,2,4,6	NC	HRS DF11-8DS or equivalent			
3	DC-OK		HRS DF11-**SC or equivalent		
5	GND				
7	+S	orequivalent			
Ω	9				

## ■ Block Diagram

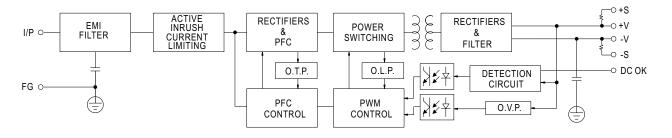

## ■ Derating Curve

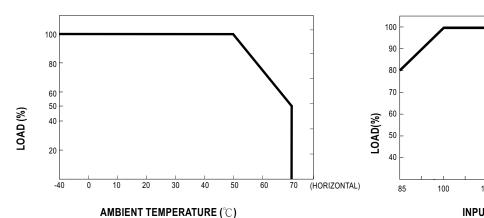

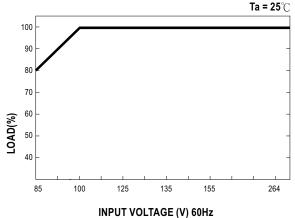

■ Output Derating VS Input Voltage