




# P2

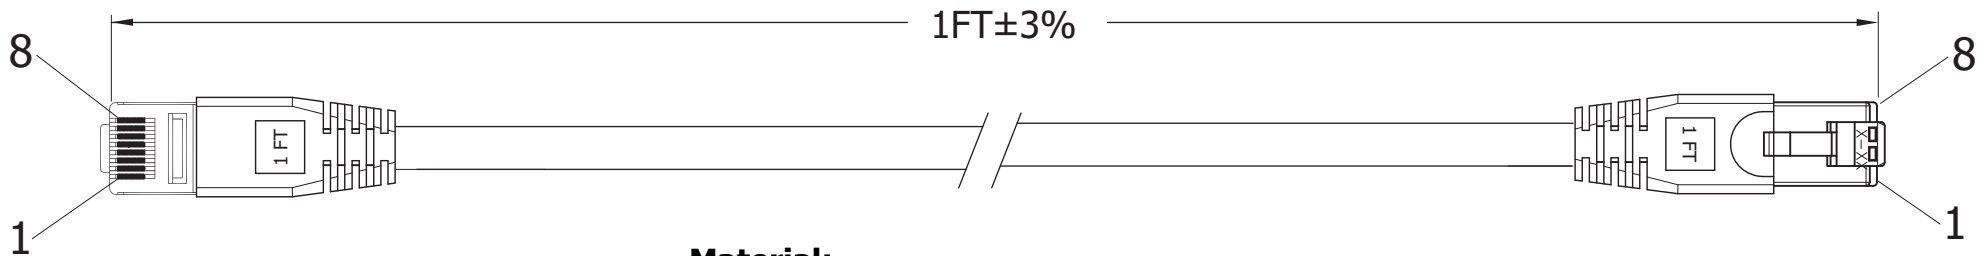


# P1

**Material:**

- 4x2, 24AWG, twisted pair, 7\*0.19±0.15MM  
- OD: 5.2MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC LD-4
- Contact Plug: UTP RJ45, 50μ"
- 568B Color wire standard
- Molded snagless boot with strain relief
- Spot length on boot
- Connection: 1:1

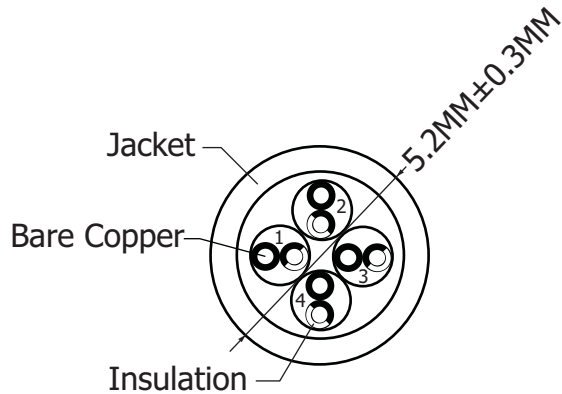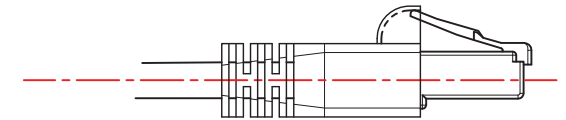

1	2	3	4
BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN

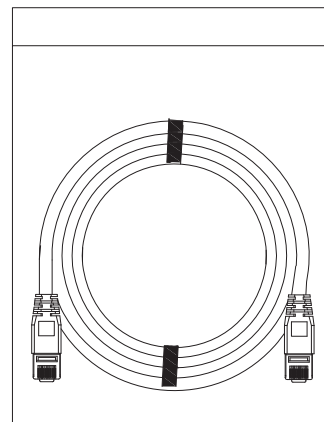

300 cables per carton

**PIN OUT**

P1	568B Color	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
4	Blue	4
5	White/Blue	5
6	Green	6
7	White/Brown	7
8	Brown	8

Ⓜ = Assmann logo



ITEM NO.

# DK-1511-001/B

TITLE CAT5e Patch Cord - Unshielded, Booted, 1 Foot,  
UTP, 24AWG, Contact Plating 50μ" of Gold, Blue

# ASSMANN

## Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved