




# P2

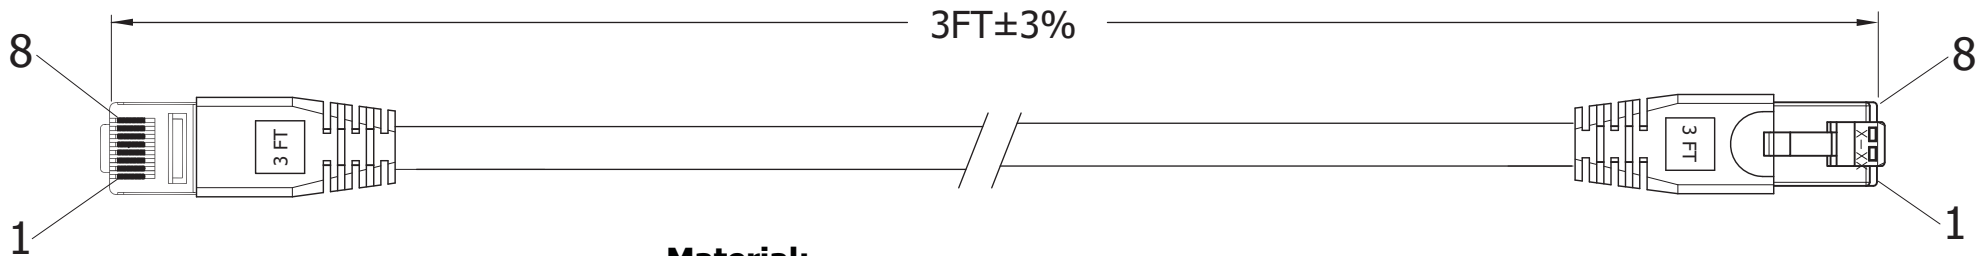


# P1

**Material:**

- 4x2, 24AWG, twisted pair, 7\*0.19±0.15MM  
- OD: 6.0MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC
- Contact Plug: UTP RJ45, 50µ"
- 568B Color wire standard
- Molded snagless boot with strain relief
- Spot length on boot
- Connection: 1:1

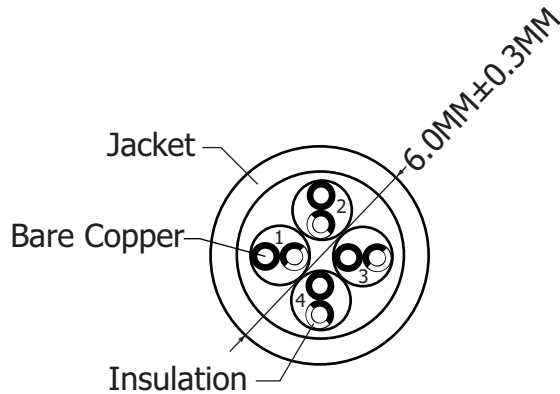

|               |               |               |               |
|---------------|---------------|---------------|---------------|
| 1             | 2             | 3             | 4             |
| BLU<br>WH/BLU | ORG<br>WH/ORG | GRN<br>WH/GRN | BWN<br>WH/BWN |

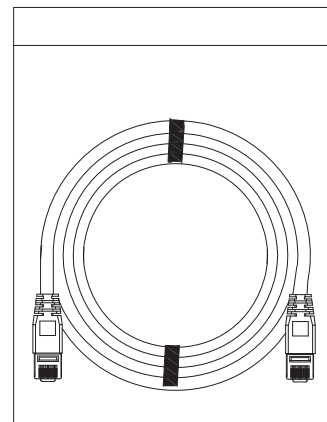

250 cables per carton

**PIN OUT**

| P1 | 568B Color   | P2 |
|----|--------------|----|
| 1  | White/Orange | 1  |
| 2  | Orange       | 2  |
| 3  | White/Green  | 3  |
| 4  | Blue         | 4  |
| 5  | White/Blue   | 5  |
| 6  | Green        | 6  |
| 7  | White/Brown  | 7  |
| 8  | Brown        | 8  |

Ⓜ = Assmann logo



ITEM NO.

# DK-1611-003/BL

TITLE

CAT6 Patch Cord - Unshielded, Booted, 3 Feet,  
UTP, 24AWG, Contact Plating 50µ" of Gold, Black

# ASSMANN

## Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved