




P2

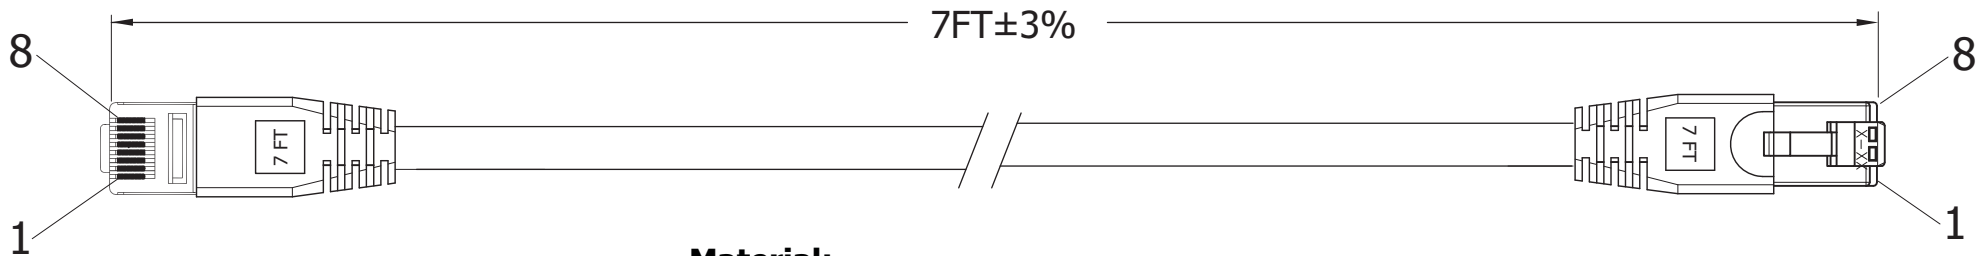


P1

Material:

- 4x2, 24AWG, twisted pair, 7*0.19±0.15MM
- OD: 5.2MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC
- Contact Plug: UTP RJ45, 50μ"
- 568B Color wire standard
- Molded snagless boot with strain relief
- Spot length on boot
- Connection: 1:1

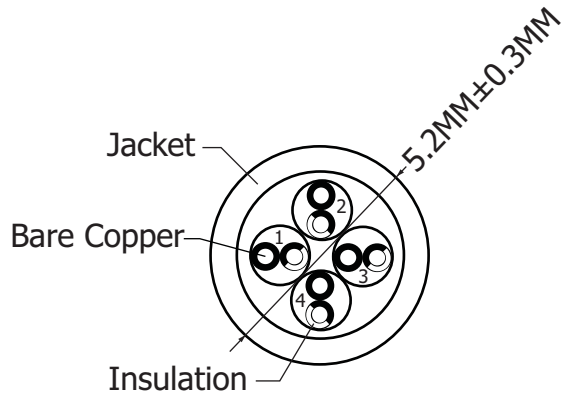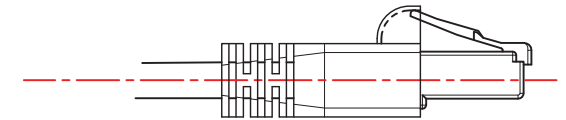

| | | | |
|---------------|---------------|---------------|---------------|
| 1 | 2 | 3 | 4 |
| BLU WH/BLU | ORG WH/ORG | GRN WH/GRN | BWN WH/BWN |

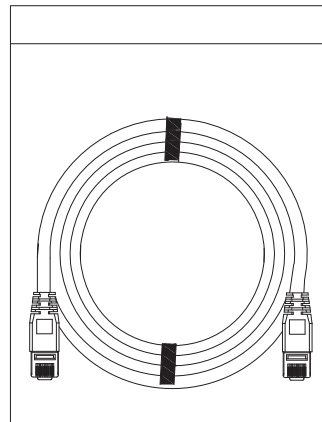

150 cables per carton

PIN OUT

| P1 | 568B Color | P2 |
|----|--------------|----|
| 1 | White/Orange | 1 |
| 2 | Orange | 2 |
| 3 | White/Green | 3 |
| 4 | Blue | 4 |
| 5 | White/Blue | 5 |
| 6 | Green | 6 |
| 7 | White/Brown | 7 |
| 8 | Brown | 8 |



ITEM NO.

DK-1511-007/B

TITLE CAT5e Patch Cord - Unshielded, Booted, 7 Feet,
UTP, 24AWG, Contact Plating 50μ" of Gold, Blue

ASSMANN

Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved