



# LM158W-LM258W-LM358W

## Low power dual operational amplifiers

### Features

- ESD internal protection: 2 kV
- Internally frequency-compensated
- Large DC voltage gain: 100 dB
- Wide bandwidth (unity gain): 1.1 MHz (temperature compensated)
- Very low supply current per operator essentially independent of supply voltage
- Low input bias current: 20 nA (temperature compensated)
- Low input offset voltage: 2 mV
- Low input offset current: 2 nA
- Input common-mode voltage range includes ground
- Differential input voltage range equal to the power supply voltage
- Large output voltage swing 0 V to  $V_{CC}^+ - 1.5$  V

### Description

These circuits consist of two independent, high-gain, internally frequency-compensated op-amps, which are specifically designed to operate from a single power supply over a wide range of voltages. The low-power supply drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, DC gain blocks and all the conventional op-amp circuits, which can now be more easily implemented in single power supply systems. For example, these circuits can be directly supplied with the standard +5 V, which is used in logic systems and will easily provide the required interface electronics with no additional power supply.

In linear mode the input common-mode voltage range includes ground and the output



**N**  
**DIP-8**  
(Plastic package)




**D & S**  
**SO-8 & miniSO-8**  
(Plastic micropackage)



**P**  
**TSSOP8**  
(Thin shrink small outline package)

### Pin connections (top view)




- 1 - Output 1
- 2 - Inverting input
- 3 - Non-inverting input
- 4 -  $V_{CC}^-$
- 5 - Non-inverting input 2
- 6 - Inverting input 2
- 7 - Output 2
- 8 -  $V_{CC}^+$

voltage can also swing to ground, even though operated from only a single power supply voltage.

# 1 Schematic diagram

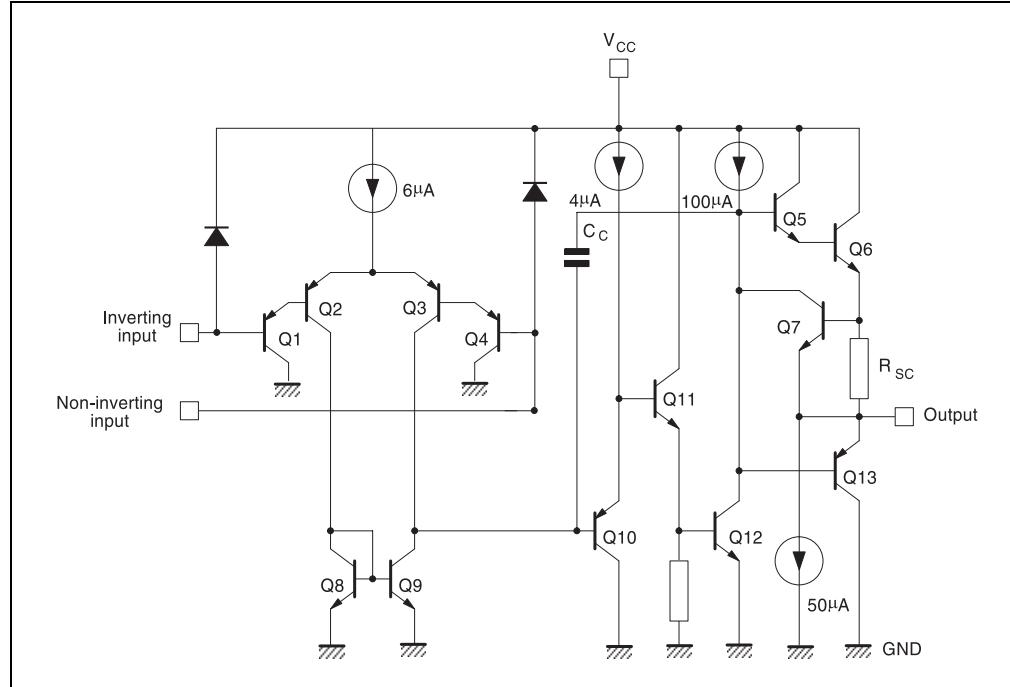Figure 1. Schematic diagram (1/2 LM158W)



## 2 Absolute maximum ratings and operating conditions

**Table 1. Absolute maximum ratings**

Symbol	Parameter	LM158W/AW	LM258W/AW	LM358W/AW	Unit
$V_{CC}^+$	Supply voltage	+32			V
$V_{in}$	Input voltage	-0.3 to $V_{CC}^+$ +0.3			V
$V_{id}$	Differential input voltage	-0.3 to $V_{CC}^+$ +0.3			V
	Output short-circuit duration <sup>(1)</sup>	Infinite			
$I_{in}$	Input current <sup>(2)</sup>	5mA in DC or 50mA in AC (duty cycle=10%, T=1s)			mA
$T_{oper}$	Operating free-air temperature range	-55 to +125	-40 to +105	0 to +70	°C
$T_{stg}$	Storage temperature range	-65 to +150			°C
$T_j$	Maximum junction temperature	150			°C
$R_{thja}$	Thermal resistance junction to ambient <sup>(3)</sup> SO-8 MiniSO-8 TSSOP8 DIP-8	125 190 120 85			°C/W
$R_{thjc}$	Thermal resistance junction to case <sup>(3)</sup> SO-8 MiniSO-8 TSSOP8 DIP-8	40 39 37 41			°C/W
ESD	HBM: human body model <sup>(4)</sup>	2			kV
	MM: machine model <sup>(5)</sup>	200			V
	CDM: charged device model <sup>(6)</sup>	1.5			kV

- Short-circuits from the output to  $V_{CC}$  can cause excessive heating if  $V_{CC} > 15$  V. The maximum output current is approximately 40 mA independent of the magnitude of  $V_{CC}$ . Destructive dissipation can result from simultaneous short-circuits on all amplifiers.
- This input current only exists when the voltage at any of the input leads is driven negative. It is due to the collector-base junction of the input PNP transistor becoming forward biased and thereby acting as input diode clamps. In addition to this diode action, there is also NPN parasitic action on the IC chip. This transistor action can cause the output voltages of the Op-amps to go to the  $V_{CC}$  voltage level (or to ground for a large overdrive) for the time during which an input is driven negative. This is not destructive and normal output will be restored for input voltage higher than -0.3 V.
- Short-circuits can cause excessive heating and destructive dissipation.  $R_{th}$  are typical values.
- Human body model: a 100 pF capacitor is discharged through a 1.5 kΩ resistor between two pins of the device, done for all couples of pin combinations with other pins floating.
- Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5 Ω), done for all couples of pin combinations with other pins floating.
- Charged device model: all pins plus package are charged together to the specified voltage and then discharged directly to the ground.

**Table 2. Operating conditions**

Symbol	Parameter	Value	Unit
$V_{CC}^+$	Supply voltage	3 to 30	V
$V_{icm}$	Common mode input voltage range <sup>(1)</sup>	$V_{DD} -0.3$ to $V_{CC} -1.5$	V
$T_{oper}$	Operating free air temperature range LM158W LM258W LM358W	-55 to +125 -40 to +105 0 to +70	°C

1. When used in comparator, the functionality is guaranteed as long as at least one input remains within the operating common mode voltage range.

### 3 Electrical characteristics

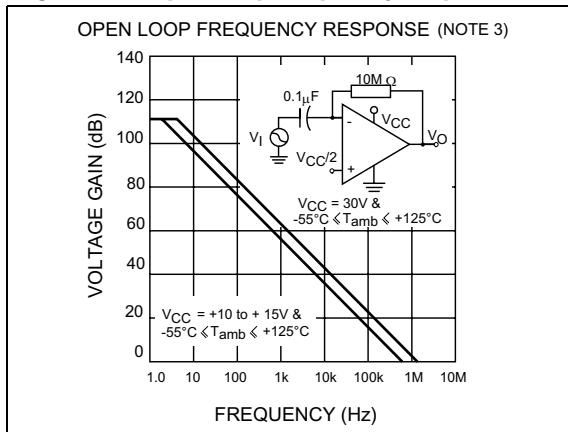
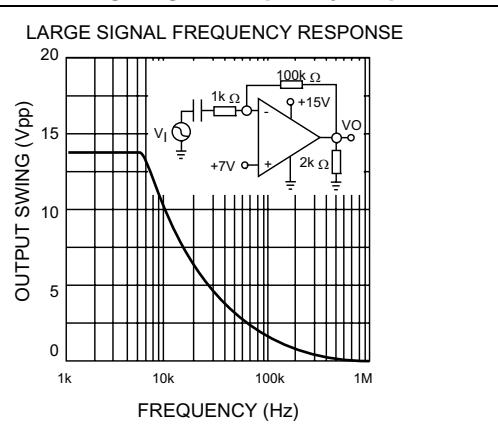
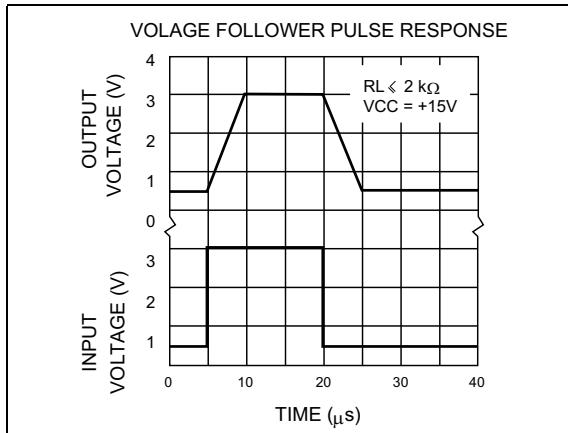
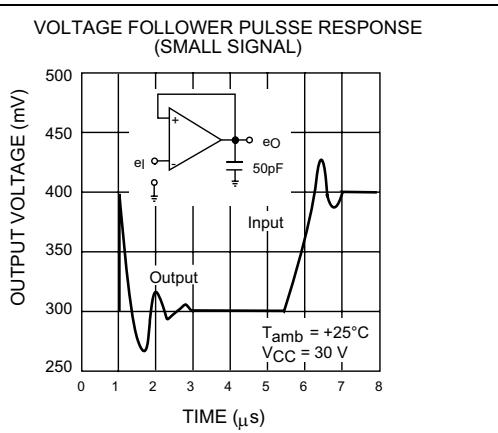
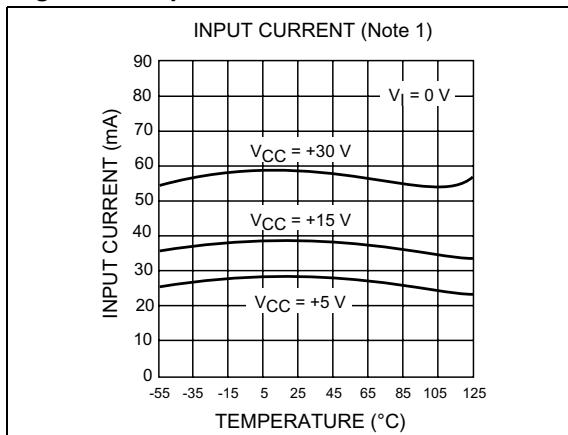
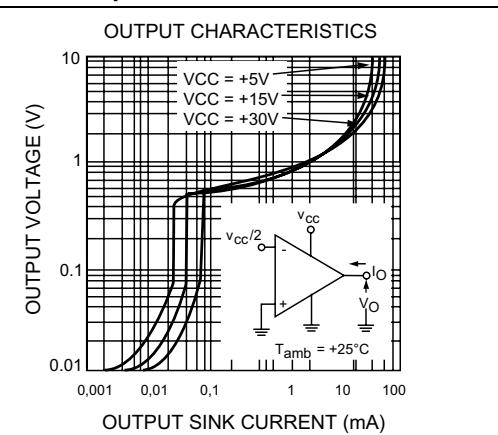
**Table 3.**  $V_{CC^+} = +5\text{ V}$ ,  $V_{CC^-} = \text{ground}$ ,  $V_o = 1.4\text{ V}$ ,  $T_{amb} = +25^\circ\text{C}$   
(unless otherwise specified)

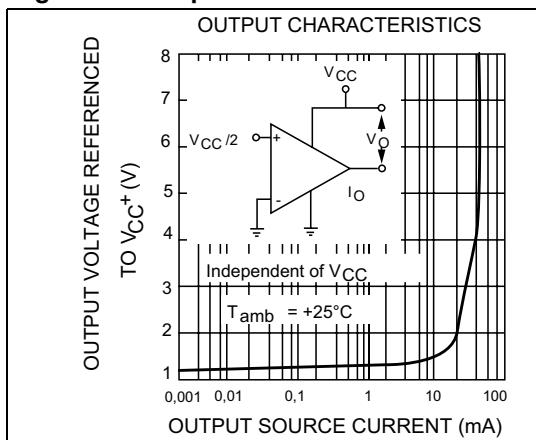
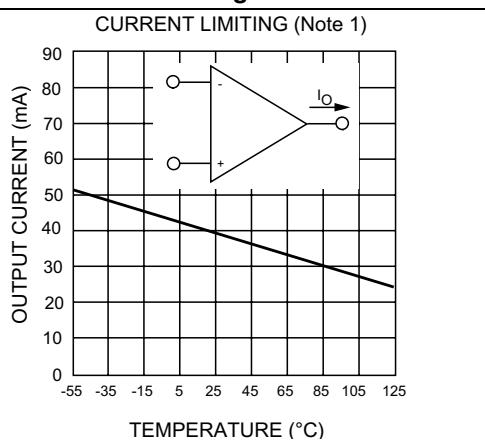
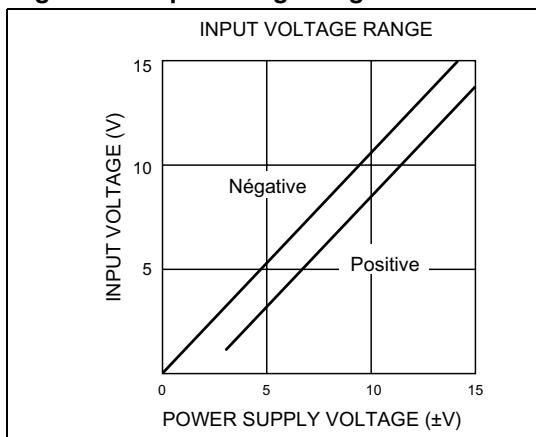
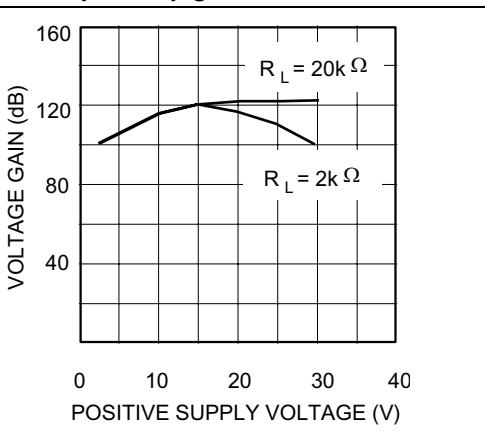
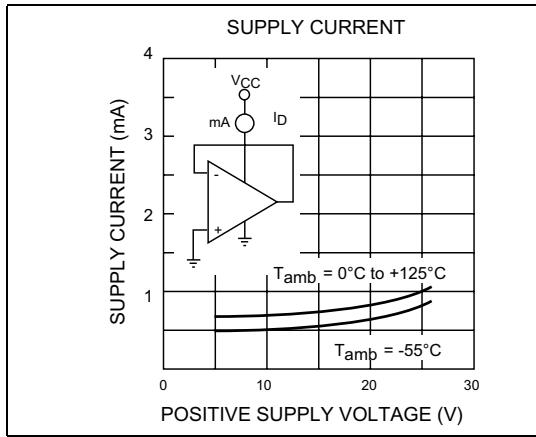
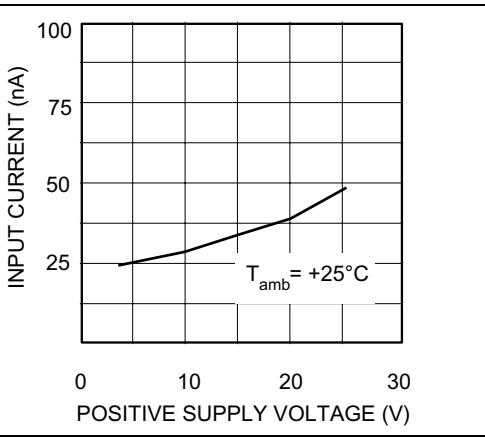
Symbol	Parameter	Min.	Typ.	Max.	Unit
$V_{io}$	Input offset voltage (1) LM158AW LM258AW, LM358AW LM158W, LM258W LM358W $T_{min} \leq T_{amb} \leq T_{max}$ LM158AW, LM258AW, LM358AW LM158W, LM258W LM358W		1 1 2 2	2 3 5 7 4 7 9	mV
$DV_{io}$	Input offset voltage drift LM158AW, LM258AW, LM358AW LM158W, LM258W, LM358W		7 7	15 30	$\mu\text{V}/^\circ\text{C}$
$I_{io}$	Input offset current LM158AW, LM258AW, LM358AW LM158W, LM258W, LM358W $T_{min} \leq T_{amb} \leq T_{max}$ LM158AW, LM258AW, LM358AW LM158W, LM258W, LM358W		2 2	10 30 30 40	nA
$DI_{io}$	Input offset current drift LM158AW, LM258AW, LM358AW LM158W, LM258W, LM358W		10 10	200 300	$\text{pA}/^\circ\text{C}$
$I_{ib}$	Input bias current (2) LM158AW, LM258AW, LM358AW LM158W, LM258W, LM358W $T_{min} \leq T_{amb} \leq T_{max}$ LM158AW, LM258AW, LM358AW LM158W, LM258W, LM358W		20 20	50 150 100 200	nA
$A_{vd}$	Large signal voltage gain $V_{CC^+} = +15\text{ V}$ , $R_L = 2\text{ k}\Omega$ , $V_o = 1.4\text{ V}$ to $11.4\text{ V}$ $T_{min} \leq T_{amb} \leq T_{max}$	50 25	100		$\text{V/mV}$
SVR	Supply voltage rejection ratio $R_s \leq 10\text{ k}\Omega$ , $V_{CC^+} = 5\text{ V}$ to $30\text{ V}$ $T_{min} \leq T_{amb} \leq T_{max}$	65 65	100		dB
$I_{cc}$	Supply current, all amp, no load $T_{min} \leq T_{amb} \leq T_{max}$ , $V_{CC^+} = +5\text{ V}$ $T_{min} \leq T_{amb} \leq T_{max}$ , $V_{CC^+} = +30\text{ V}$		0.7	1.2 2	mA





**Table 3.**  $V_{CC^+} = +5$  V,  $V_{CC^-}$  = ground,  $V_o = 1.4$  V,  $T_{amb} = +25^\circ C$   
(unless otherwise specified) (continued)

Symbol	Parameter	Min.	Typ.	Max.	Unit
$V_{icm}$	Input common mode voltage range $V_{CC^+} = +30$ V <sup>(3)</sup> $T_{amb} = +25^\circ C$ $T_{min} \leq T_{amb} \leq T_{max}$	0 0		$V_{CC^+} - 1.5$ $V_{CC^+} - 2$	V
CMR	Common mode rejection ratio $R_s \leq 10$ kΩ $T_{min} \leq T_{amb} \leq T_{max}$	70 60	85		dB
$I_{source}$	Output current source $V_{CC^+} = +15$ V, $V_o = +2$ V, $V_{id} = +1$ V	20	40	60	mA
$I_{sink}$	Output sink current $V_{CC^+} = +15$ V, $V_o = +2$ V, $V_{id} = -1$ V $V_{CC^+} = +15$ V, $V_o = +0.2$ V, $V_{id} = -1$ V	10 12	20 50		mA μA
$V_{OH}$	High level output voltage $R_L = 2$ kΩ, $V_{CC^+} = 30$ V $T_{min} \leq T_{amb} \leq T_{max}$ $R_L = 10$ kΩ, $V_{CC^+} = 30$ V $T_{min} \leq T_{amb} \leq T_{max}$	26 26 27 27	27 28		V
$V_{OL}$	Low level output voltage $R_L = 10$ kΩ $T_{min} \leq T_{amb} \leq T_{max}$		5	20 20	mV
SR	Slew rate $V_{CC^+} = 15$ V, $V_i = 0.5$ to $3$ V, $R_L = 2$ kΩ $C_L = 100$ pF, unity gain	0.3	0.6		V/μs
GBP	Gain bandwidth product $V_{CC^+} = 30$ V, $f = 100$ kHz, $V_{in} = 10$ mV, $R_L = 2$ kΩ $C_L = 100$ pF	0.7	1.1		MHz
THD	Total harmonic distortion $f = 1$ kHz, $A_v = 20$ dB, $R_L = 2$ kΩ, $V_o = 2$ V <sub>pp</sub> , $C_L = 100$ pF, $V_O = 2$ V <sub>pp</sub>		0.02		%
$e_n$	Equivalent input noise voltage $f = 1$ kHz, $R_s = 100$ Ω, $V_{CC^+} = 30$ V		55		$\frac{nV}{\sqrt{Hz}}$
$V_{o1}/V_{o2}$	Channel separation <sup>(4)</sup> $1$ kHz $\leq f \leq 20$ kHz		120		dB

- $V_o = 1.4$  V,  $R_s = 0$  Ω,  $5$  V  $< V_{CC^+} < 30$  V,  $0 < V_{ic} < V_{CC^+} - 1.5$  V
- The direction of the input current is out of the IC. This current is essentially constant, independent of the state of the output so there is no change in the load on the input lines.
- The input common-mode voltage of either input signal voltage should not be allowed to go negative by more than 0.3 V. The upper end of the common-mode voltage range is  $V_{CC^+} - 1.5$  V, but either or both inputs can go to +32 V without damage.
- Due to the proximity of external components ensure that there is no coupling originating via stray capacitance between these external parts. Typically, this can be detected at higher frequencies because then this type of capacitance increases.

**Figure 2. Open loop frequency response****Figure 3. Large signal frequency response****Figure 4. Voltage follower pulse response****Figure 5. Voltage follower pulse response****Figure 6. Input current****Figure 7. Output characteristics**


**Figure 8. Output characteristics****Figure 9. Current limiting****Figure 10. Input voltage range****Figure 11. Open loop gain****Figure 12. Supply current****Figure 13. Input current**

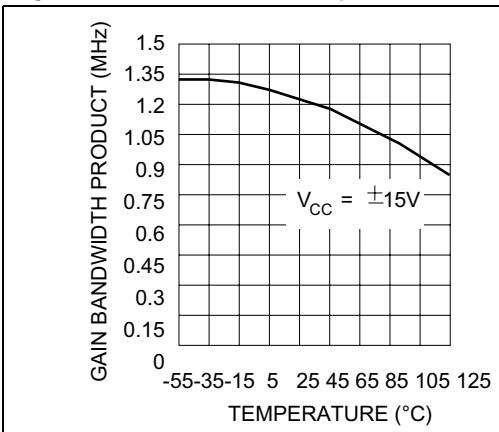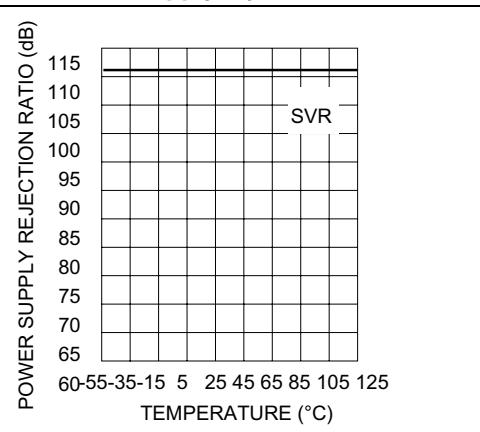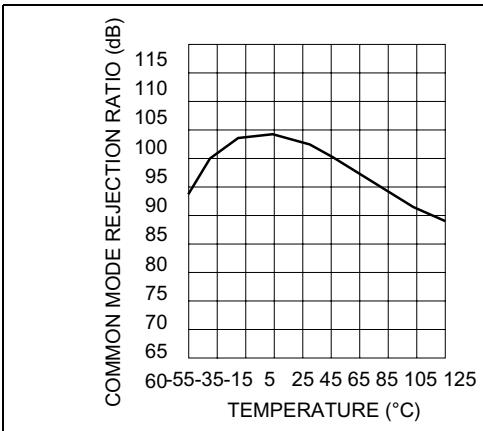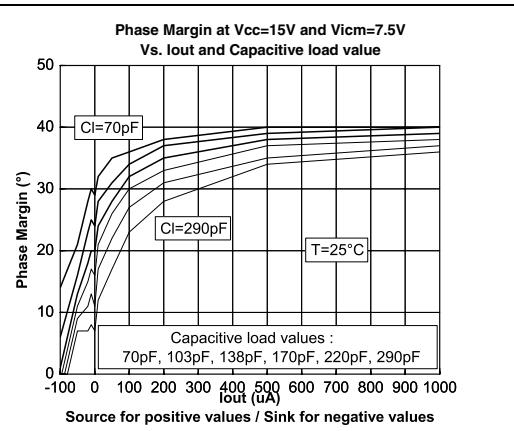**Figure 14. Gain bandwidth product****Figure 15. Power supply rejection ratio****Figure 16. Common mode rejection ratio****Figure 17. Phase margin vs. capacitive load**


## 4 Typical applications

Single supply voltage  $V_{CC} = +5 \text{ V}_{DC}$


**Figure 18. AC-coupled inverting amplifier**

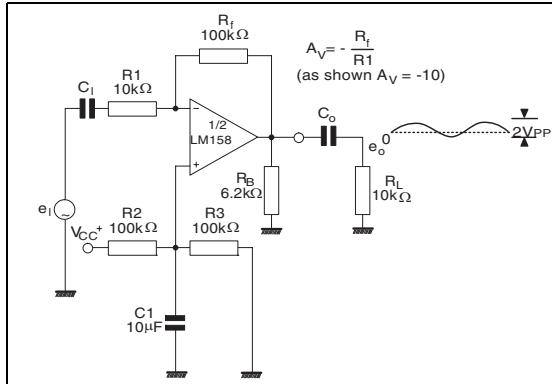


**Figure 19. Non-inverting DC amplifier**

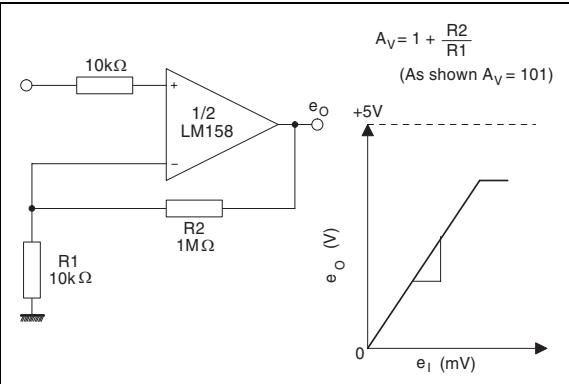


**Figure 20. AC-coupled non-inverting amplifier**

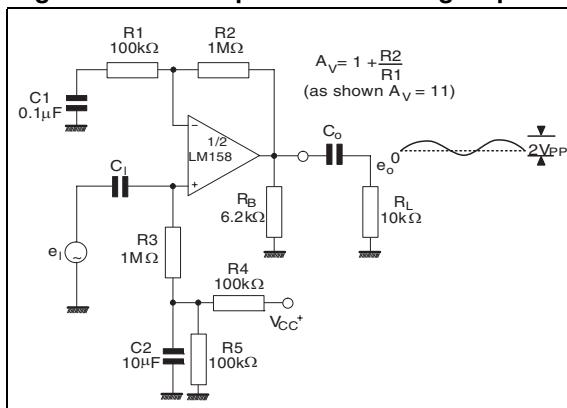


**Figure 21. DC summing amplifier**

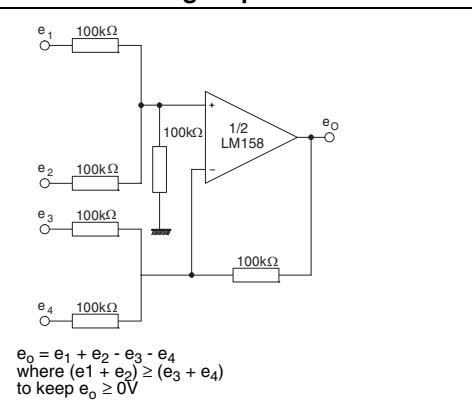


**Figure 22. High input Z, DC differential amplifier**

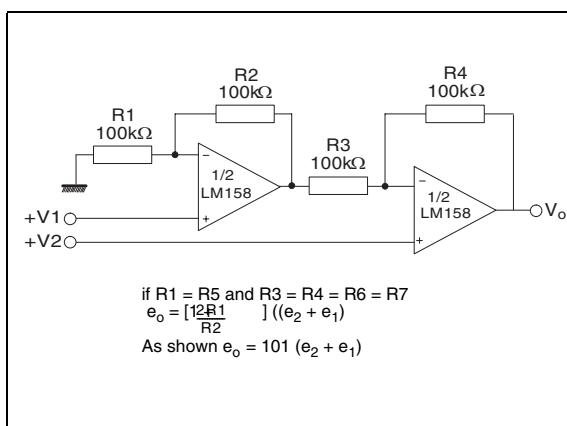


**Figure 23. High input Z adjustable gain DC instrumentation amplifier**

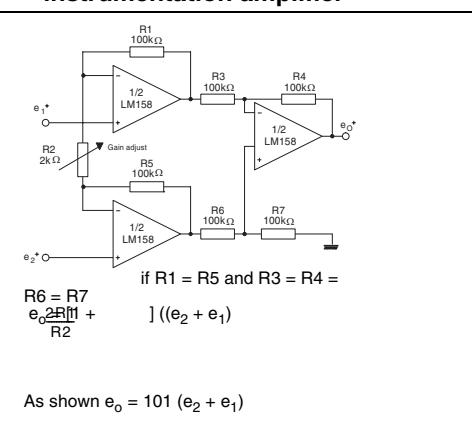


**Figure 24.** Using symmetrical amplifiers to reduce input current

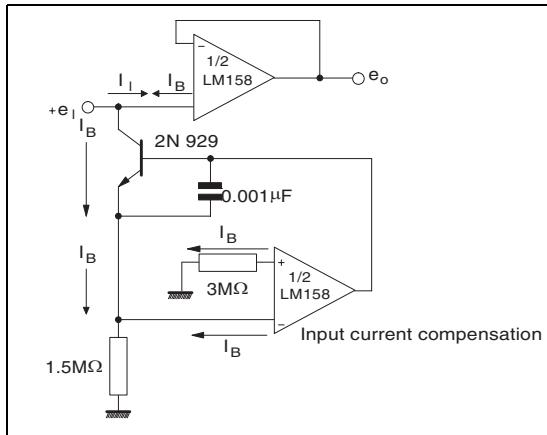

**Figure 25.** Low drift peak detector

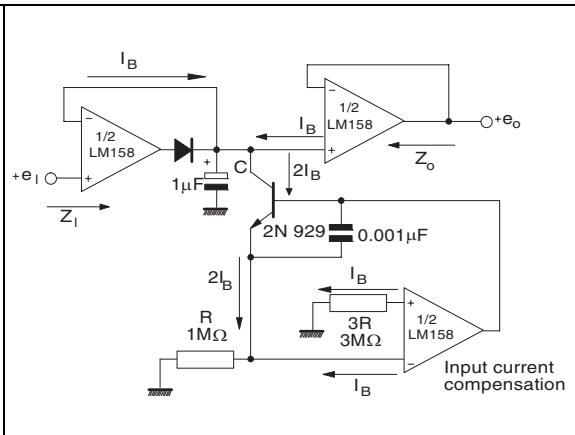

**Figure 26.** Active band-pass filter

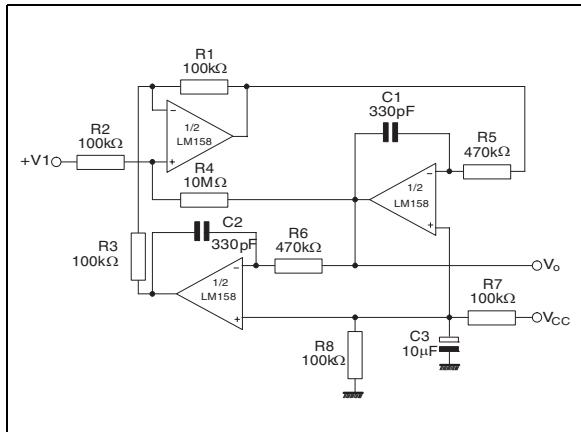

## 5 Package information

In order to meet environmental requirements, STMicroelectronics offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an STMicroelectronics trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).

## 5.1 DIP8 package information

Figure 27. DIP8 package mechanical drawing

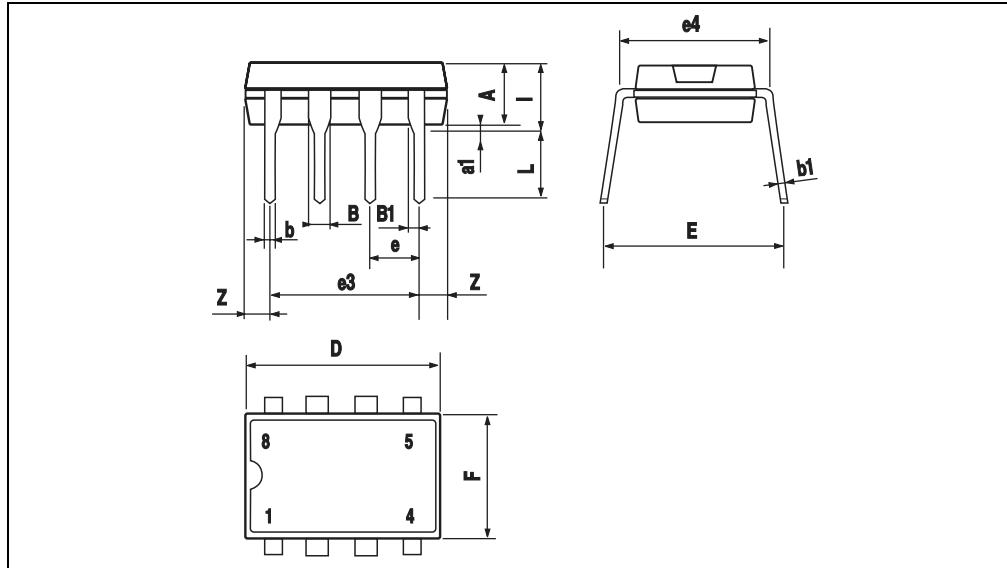


Table 4. DIP8 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		3.3			0.130	
a1	0.7			0.028		
B	1.39		1.65	0.055		0.065
B1	0.91		1.04	0.036		0.041
b		0.5			0.020	
b1	0.38		0.5	0.015		0.020
D			9.8			0.386
E		8.8			0.346	
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			7.1			0.280
I			4.8			0.189
L		3.3			0.130	
Z	0.44		1.6	0.017		0.063

## 5.2 SO-8 package information

Figure 28. SO-8 package mechanical drawing

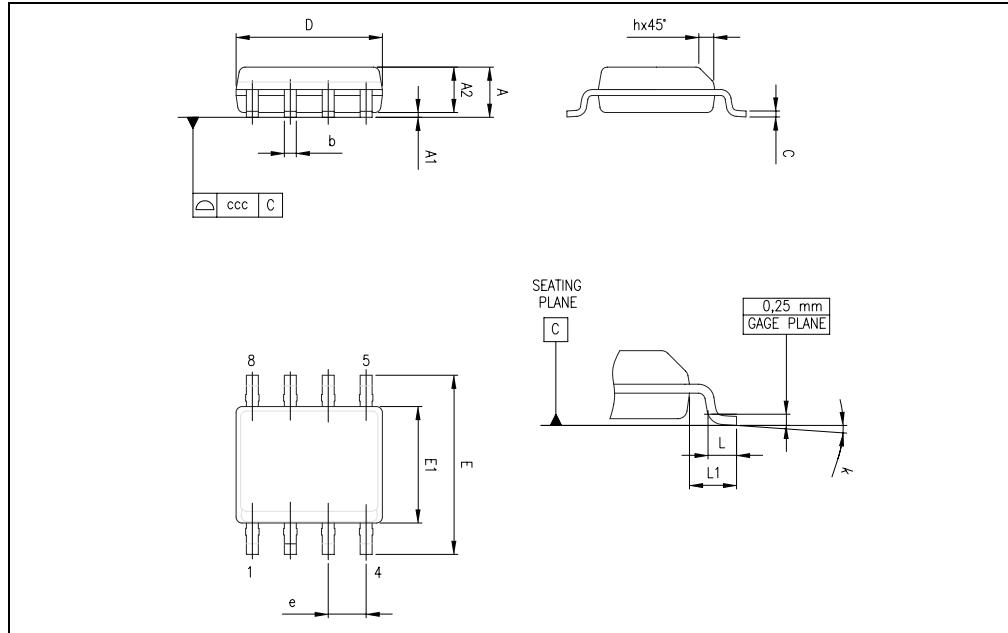


Table 5. SO-8 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
A1	0.10		0.25	0.004		0.010
A2	1.25			0.049		
b	0.28		0.48	0.011		0.019
c	0.17		0.23	0.007		0.010
D	4.80	4.90	5.00	0.189	0.193	0.197
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.154	0.157
e		1.27			0.050	
h	0.25		0.50	0.010		0.020
L	0.40		1.27	0.016		0.050
L1		1.04			0.040	
k	1°		8°	1°		8°
ccc			0.10			0.004

## 5.3 MiniSO-8 package information

Figure 29. MiniSO-8 package mechanical drawing

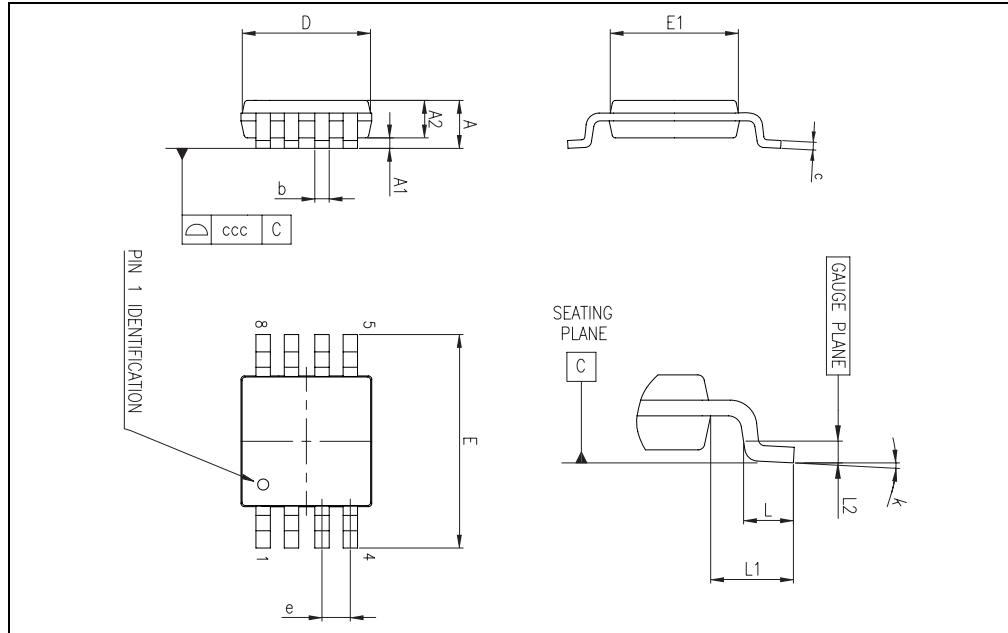


Table 6. MiniSO-8 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.1			0.043
A1	0		0.15	0		0.006
A2	0.75	0.85	0.95	0.030	0.033	0.037
b	0.22		0.40	0.009		0.016
c	0.08		0.23	0.003		0.009
D	2.80	3.00	3.20	0.11	0.118	0.126
E	4.65	4.90	5.15	0.183	0.193	0.203
E1	2.80	3.00	3.10	0.11	0.118	0.122
e		0.65			0.026	
L	0.40	0.60	0.80	0.016	0.024	0.031
L1		0.95			0.037	
L2		0.25			0.010	
k	0°		8°	0°		8°
ccc			0.10			0.004

## 5.4 TSSOP8 package information

Figure 30. TSSOP8 package mechanical drawing

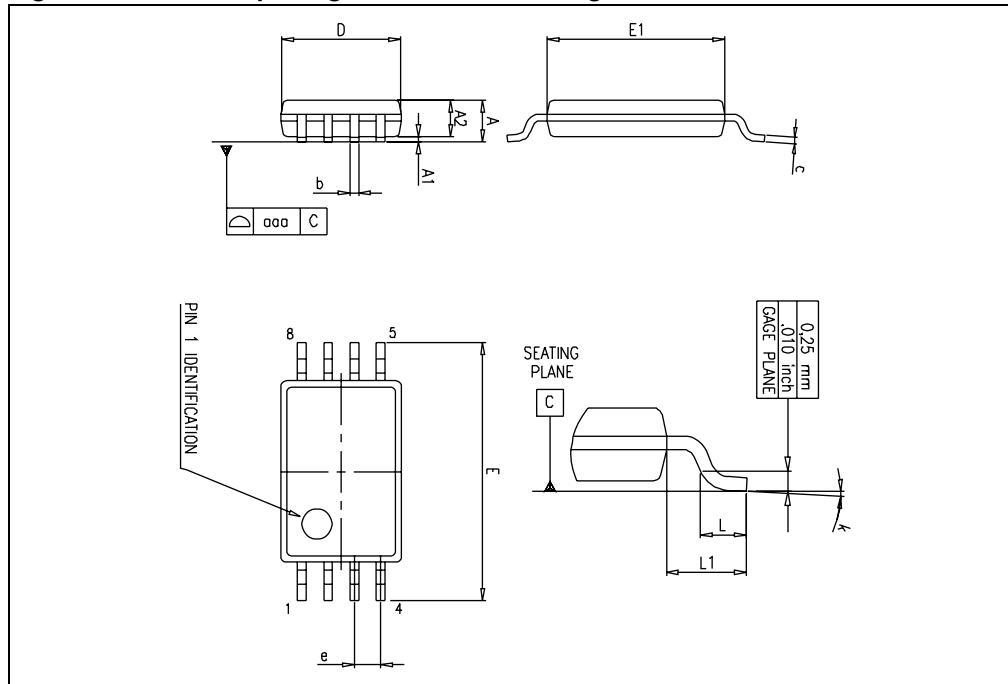


Table 7. TSSOP8 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.2			0.047
A1	0.05		0.15	0.002		0.006
A2	0.80	1.00	1.05	0.031	0.039	0.041
b	0.19		0.30	0.007		0.012
c	0.09		0.20	0.004		0.008
D	2.90	3.00	3.10	0.114	0.118	0.122
E	6.20	6.40	6.60	0.244	0.252	0.260
E1	4.30	4.40	4.50	0.169	0.173	0.177
e		0.65			0.0256	
k	0°		8°	0°		8°
L	0.45	0.60	0.75	0.018	0.024	0.030
L1		1			0.039	
aaa		0.1			0.004	

## 6 Ordering information

**Table 8. Order codes**

Order code	Temperature range	Package	Packaging	Marking
LM158WN	-55°C, +125°C	DIP-8	Tube	LM158WN
LM158WD LM158WDT		SO-8	Tube or tape & reel	158W
LM258WAN	-40°C, +105°C	DIP-8	Tube	LM258WA
LM258WN		DIP-8	Tube	LM258WN
LM258WAD LM258WADT		SO-8	Tube or tape & reel	258WA
LM258WN		DIP-8	Tube	LM258WN
LM258WD LM258WDT		SO-8	Tube or tape & reel	258W
LM258WPT		TSSOP8	Tape & reel	258W
LM258AWPT		SO-8 (Automotive grade)	Tube or tape & reel	258AW
LM258WYD <sup>(1)</sup> LM258WYDT <sup>(1)</sup>		TSSOP8 (Automotive grade)	Tape & reel	258WY
LM258AWYD <sup>(1)</sup> LM258AWYDT <sup>(1)</sup>		MSO8	Tape & reel	258AWY
LM258WYPT <sup>(2)</sup>		MSO8 (Automotive grade)	Tape & reel	K410
LM258AWYPT <sup>(2)</sup>	0°C, +70°C	TSSOP8	Tape & reel	K413
LM258WYST <sup>(2)</sup>		DIP-8	Tube	K412
LM358WN		SO-8	Tube or tape & reel	LM358WN
LM358WD LM358WDT		TSSOP8	Tape & reel	358W
LM358AWD LM358AWDT		TSSOP8	Tape & reel	358AW
LM358WPT		SO-8 (Automotive grade)	Tube or tape & reel	358W
LM358AWPT		TSSOP8 (Automotive grade)	Tape & reel	358AW
LM358WYD <sup>(1)</sup> LM358WYDT <sup>(1)</sup>		MSO8	Tube or tape & reel	358WY
LM358AWYD <sup>(1)</sup> LM358AWYDT <sup>(1)</sup>		TSSOP8 (Automotive grade)	Tape & reel	358AWY
LM358WYPT <sup>(2)</sup>		MSO8 (Automotive grade)	Tape & reel	K411
LM358AWYPT <sup>(2)</sup>		TSSOP8	Tape & reel	K414
LM358WYST <sup>(2)</sup>		MSO8 (Automotive grade)	Tape & reel	K415

1. Qualification and characterization according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 & Q 002 or equivalent.
2. Qualification and characterization according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 & Q 002 or equivalent are on-going.

## 7 Revision history

**Table 9. Document revision history**

Date	Revision	Changes
01-Nov-2002	1	First release.
01-Jul-2005	2	ESD protection inserted in <a href="#">Table 1: Absolute maximum ratings on page 3</a> .
06-Oct-2006	3	ESD tolerance for model HBM improved to 2kV in <a href="#">Table 1: Absolute maximum ratings on page 3</a> . $R_{thja}$ and $R_{thjc}$ typical values added in <a href="#">Table 1: Absolute maximum ratings on page 3</a> . Added <a href="#">Figure 17: Phase margin vs. capacitive load on page 9</a> .
02-Jan-2007	4	Order codes added (automotive grade level) to <a href="#">Section 6: Ordering information</a> .
15-Mar-2007	5	Previously called revision 4. Footnote for automotive grade order codes added to <a href="#">Section 6: Ordering information</a> .
25-Apr-2007	6	Added missing Revision 4 of January 2007 in revision history. Corrected revision number of March 2007 to Revision 5.
11-Feb-2008	7	Reformatted electrical characteristics table. Reformatted package information. Corrected MiniSO-8 package information. Corrected operating temperature range for automotive grade parts.
26-Aug-2008	8	Corrected ESD values in <a href="#">Table 1: Absolute maximum ratings</a> . Added limitations on input current in <a href="#">Table 1: Absolute maximum ratings</a> . Corrected title for <a href="#">Figure 11</a> . Added E and L1 parameters in <a href="#">Table 5: SO-8 package mechanical data</a> . Added automotive grade products for MSO8 package in <a href="#">Table 8: Order codes</a> .

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

**www.st.com**

