



Specification

SPECIFICATION

FXP70 Freedom 2.4GHz Series

Part No. : **FXP70.07.0053A**

Product Name : **FXP70 Freedom 2.4GHz
Multi Standard Antenna**

Feature : **5dBi Gain
IPEX MHFII Connector (U.FL compatible)
53 mm Cable
27*25*0.1 mm
RoHS Compliant**



VERSION	DATE	PAGE	DESCRIPTION	CENTRE	APPROVED
A	03/06/2009	All	Antenna Specifications	Taiwan	Ruben F. Cuadras

© All Rights Reserved

Taoglas Limited, Unit 7 Peare Campus, Moyne Business Park, Old Dublin Road, Enniscorthy, Co. Wexford, Ireland
www.taoglas.com



Specification

I. OVERVIEW

The FXP70 Freedom 2.4GHz Antenna works on WiFi, ZigBee, Bluetooth and ISM band at 2.4GHz. This antenna has been designed as a general solution to cover the current market applications, with easy installation through a cable connection. The antenna has been designed to work on different plastics material and thickness. We have selected a piece of ABS plastic with 1.5 mm of thickness as a baseline for testing.

II. ANTENNA CHARACTERISTICS

Parameter	Multi-Standard			
	Bluetooth	WiFi	ZigBee	2.4GHz ISM
Communication System	2401-2480	2412-2462	2410-2480	2400-2483.5
Efficiency (%)	80			
Gain (dBi)	5			
Return Loss (dB)	20			
Impedance	50 Ohms			
VSWR	≤1.5:1			
Polarization	Linear			
Power Handled	5 W			
Operation Temperature	-40 °C ~ +85 °C			
Storage Temperature	-40 °C ~ +85 °C			
Dimensions	27 X 25 X 0.08 mm			
Weight	1.2 g			
Connector	MHFII (U.FL Compatible)			
Cable Standard	Mini-Coax 1.13 mm			
Cable Length and color	53 mm, Black			
RoHS Compliant	Yes			
Adhesive	3M 467			



Specification

III. TEST SET UP

A Satimo SG24 3D Scan System with Anechoic Chamber.

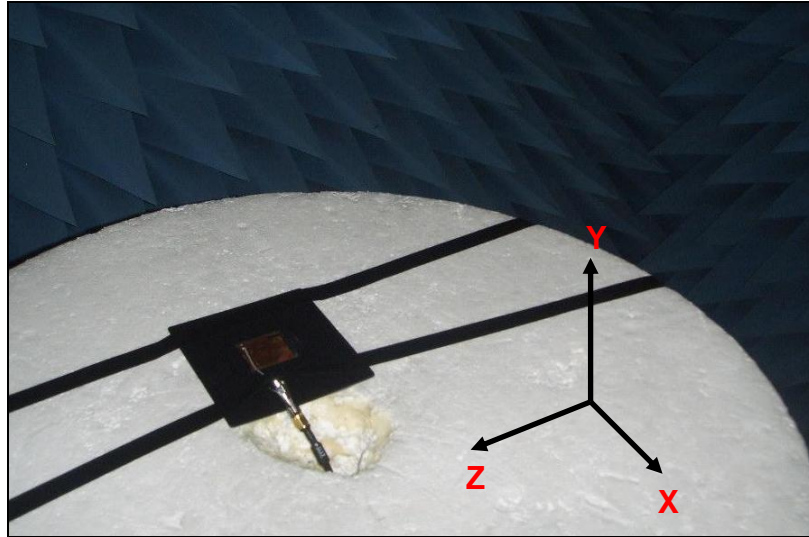


Figure 1. Satimo System.

Agilent 8753ES Vector Network Analyzer.



Figure 2. Network Analyzer.



IV. ANTENNA PARAMETERS

The next antenna parameter graphs like Return Loss, Smith Chart and VSWR were measured in the Agilent 8753ES Vector Network Analyzer. The Gain, Efficiency and Radiation Patterns were measured in the reliable Satimo 3D Scan System.

A. Return Loss Data

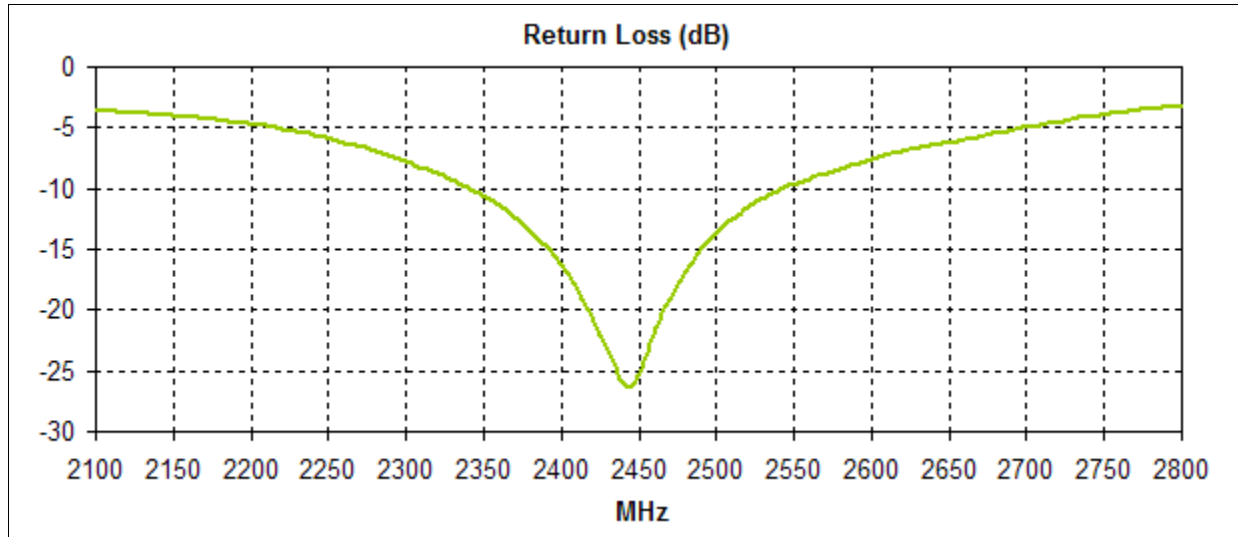


Figure 3. Return Loss for the FXP70 Antenna.

B. VSWR Data

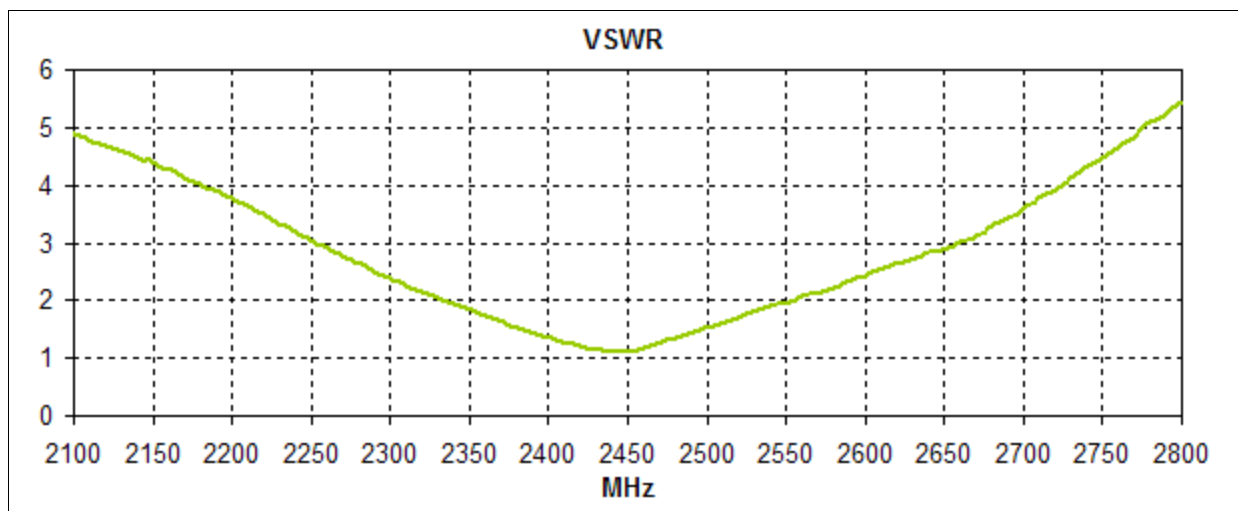


Figure 4. VSWR for the FXP70 Antenna.



Specification

C. Smith Chart Data

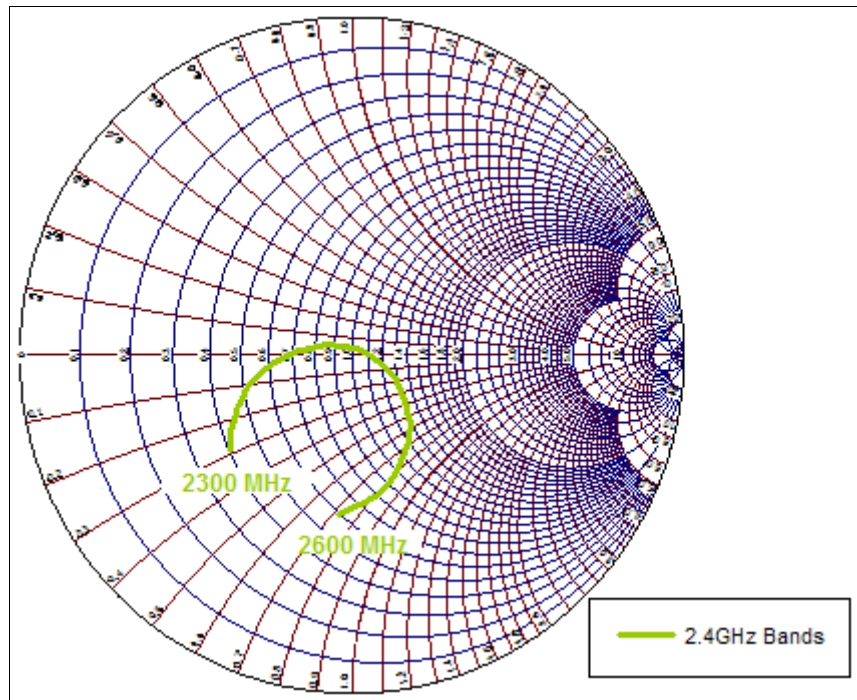


Figure 5. Smith Chart for the FXP70 Antenna.

D. Gain Data

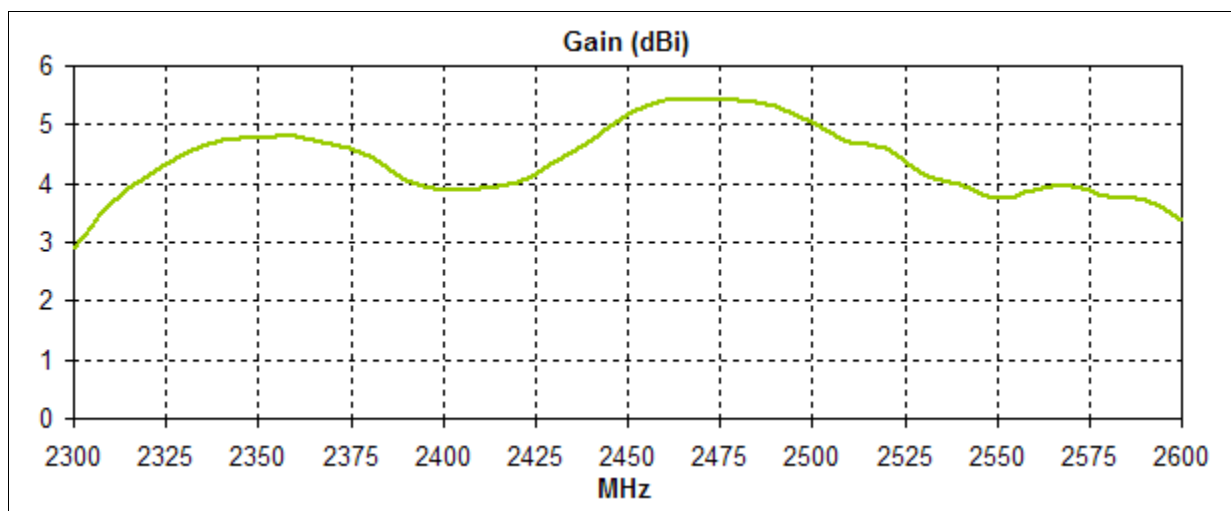


Figure 6. Gain for the FXP70 Antenna.



E. Efficiency Data

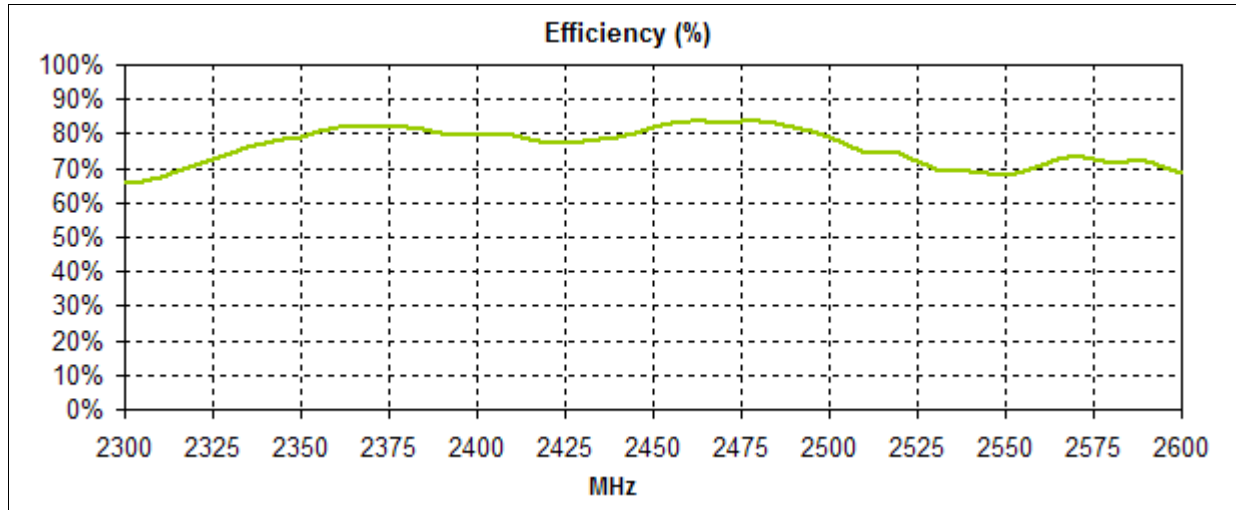


Figure 7. Efficiency for the FXP70 Antenna.

F. Radiation Pattern Data.

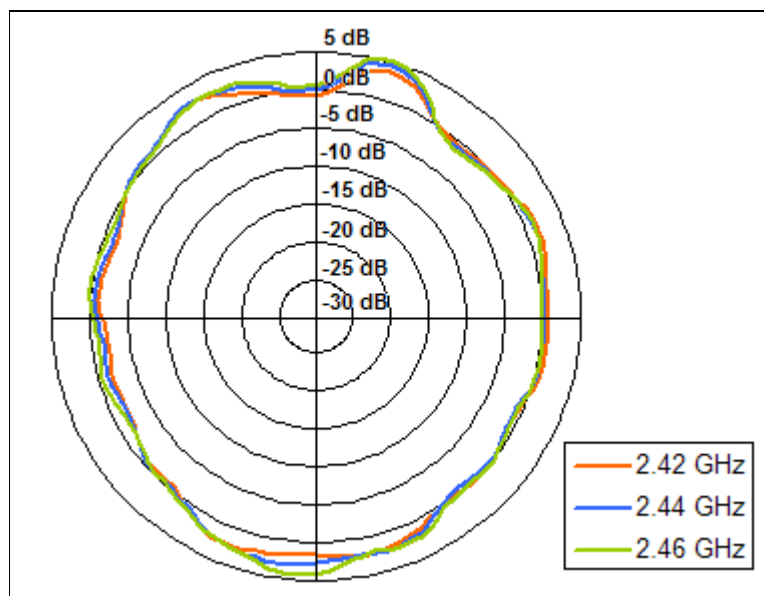


Figure 8. Radiation pattern XZ Plane, Figure 1 as reference (dB).



Specification

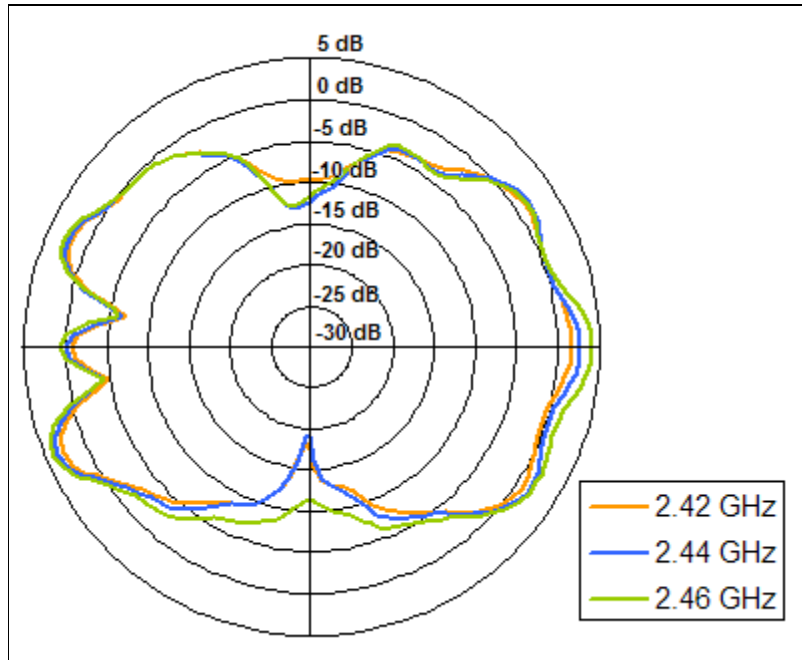


Figure 9. Radiation pattern YZ Plane, Figure 1 as reference (dB).

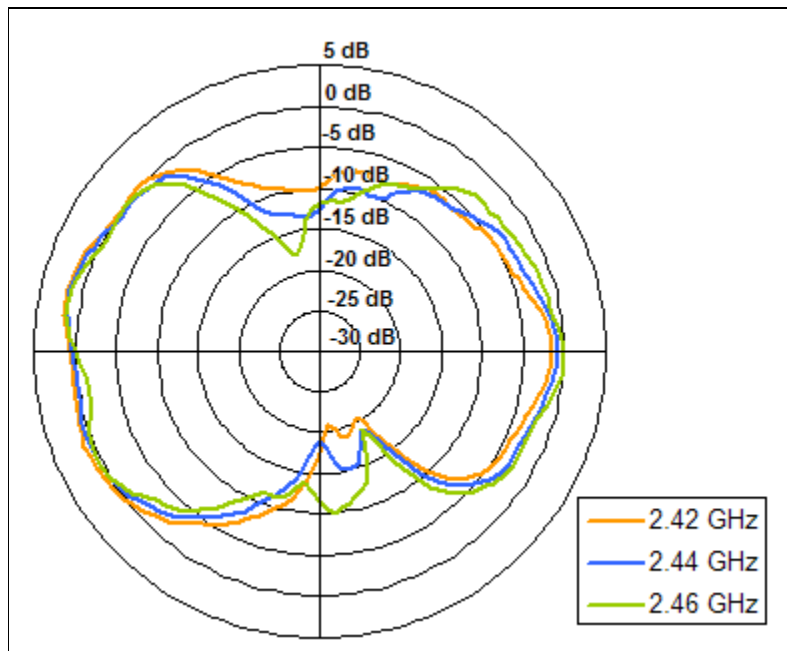


Figure 10. Radiation pattern XY plane, Figure 1 as reference (dB).



Specification

V. MECHANICAL DRAWING

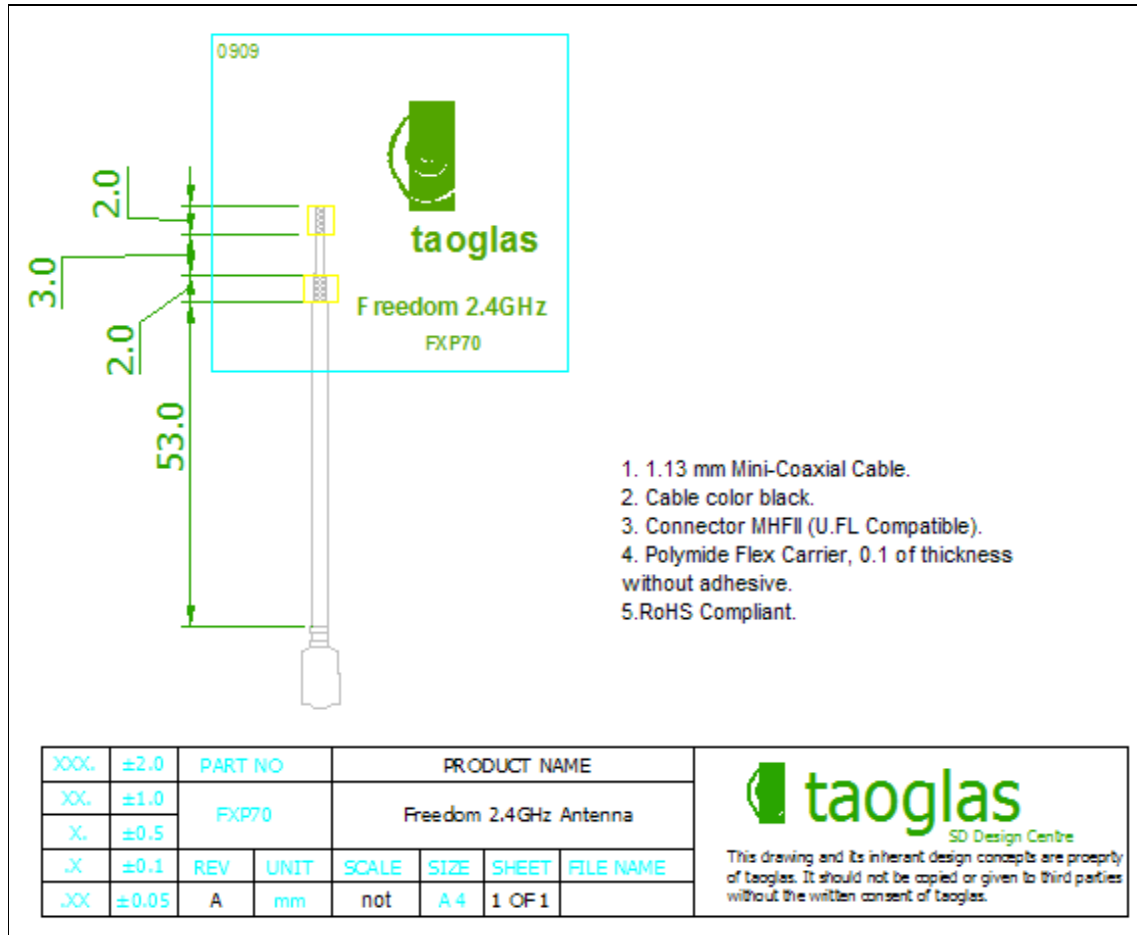


Figure 11. Mechanical Drawing for the FXP70 Antenna.