

# Type DMT, Polyester Film Capacitors

Film/Foil  
Radial Leads

General Purpose, High Peak Currents,  
High Insulation Resistance



**Type DMT** radial-leaded, polyester film/foil noninductively wound film capacitors feature compact size and moisture-resistive epoxy coating. High insulation resistance and low dissipation factor, **Type DMT** is an ideal choice for most applications, especially with high peak currents.

## Specifications

**Voltage Range:** 100-600 Vdc (65-250 Vac, 60 Hz)

**Capacitance Range:** .001-.68  $\mu\text{F}$

**Capacitance Tolerance:**  $\pm 10\%$  (K) standard  
 $\pm 5\%$  (J) optional

**Operating Temperature Range:** -55 °C to 125 °C\*


\*Full-rated voltage at 85 °C—Derate linearly to 50%-rated voltage at 125 °C

**Dielectric Strength:** 250% (1 minute)

**Dissipation Factor:** 1% Max. (25 °C, 1 kHz)

**Insulation Resistance:** 30,000 M $\Omega$  x  $\mu\text{F}$   
100,000 M $\Omega$  Min.

**Life Test:** 500 Hours at 85 °C at 125% Rated  
Voltage

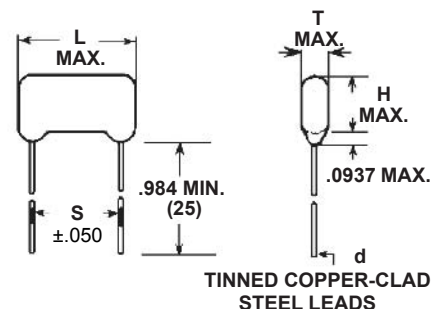

**NOTE:** Other capacitance values, sizes and performance specifications are available. Contact us.

## Ratings

## RoHS Compliant

Cap. ( $\mu\text{F}$ )	Catalog Part Number	T Inches (mm)	H Inches (mm)	L Inches (mm)	S Inches (mm)	d Inches (mm)	dV/dt V/ $\mu\text{s}$
<b>100 Vdc (65 Vac)</b>							
0.0010	DMT1D1K-F	0.197 (5.0)	0.354 (9.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0015	DMT1D15K-F	0.200 (5.1)	0.354 (9.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0022	DMT1D22K-F	0.210 (5.3)	0.354 (9.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0033	DMT1D33K-F	0.210 (5.3)	0.354 (9.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0047	DMT1D47K-F	0.210 (5.3)	0.354 (9.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0068	DMT1D68K-F	0.210 (5.3)	0.354 (9.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0100	DMT1S1K-F	0.220 (5.6)	0.354 (9.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0150	DMT1S15K-F	0.220 (5.6)	0.370 (9.4)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0220	DMT1S22K-F	0.256 (6.5)	0.390 (9.9)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	4550
0.0330	DMT1S33K-F	0.250 (6.3)	0.350 (8.9)	0.560 (14.2)	0.400 (10.2)	0.032 (0.8)	3300
0.0470	DMT1S47K-F	0.260 (6.6)	0.433 (11.0)	0.560 (14.2)	0.420 (10.7)	0.032 (0.8)	3300
0.0680	DMT1S68K-F	0.275 (7.0)	0.460 (11.7)	0.560 (14.2)	0.420 (10.7)	0.032 (0.8)	3300
0.1000	DMT1P1K-F	0.290 (7.4)	0.445 (11.3)	0.682 (17.3)	0.545 (13.8)	0.032 (0.8)	2100
0.1500	DMT1P15K-F	0.350 (8.9)	0.490 (12.4)	0.682 (17.3)	0.545 (13.8)	0.032 (0.8)	2100
0.2200	DMT1P22K-F	0.360 (9.1)	0.520 (13.2)	0.820 (20.8)	0.670 (17.0)	0.032 (0.8)	1600
0.3300	DMT1P33K-F	0.390 (9.9)	0.560 (14.2)	0.942 (23.9)	0.795 (20.2)	0.032 (0.8)	1600
0.4700	DMT1P47K-F	0.420 (10.7)	0.600 (15.2)	1.080 (27.4)	0.920 (23.4)	0.032 (0.8)	1050

# Type DMT, Polyester Film Capacitors

RoHS Compliant

Cap. ( $\mu$ F)	Catalog Part Number	T Inches (mm)	H Inches (mm)	L Inches (mm)	S Inches (mm)	d Inches (mm)	dV/dt V/ $\mu$ s
0.5000	DMT1P5K-F	0.530 (13.5)	0.690 (17.5)	1.102 (28.0)	0.920 (23.4)	0.032 (0.8)	1050
0.6800	DMT1P68K-F	0.480 (12.2)	0.690 (17.5)	1.140 (28.9)	0.985 (25.0)	0.032 (0.8)	1050
1.0000	DMT1W1K-F	0.520 (13.2)	0.730 (18.5)	1.330 (33.8)	1.170 (29.7)	0.032 (0.8)	800
<b>200/250 Vdc (125 Vac)</b>							
0.0010	DMT2D1K-F	0.217 (5.5)	0.374 (9.5)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0015	DMT2D15K-F	0.217 (5.5)	0.374 (9.5)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0022	DMT2D22K-F	0.217 (5.5)	0.374 (9.5)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0033	DMT2D33K-F	0.217 (5.5)	0.374 (9.5)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0047	DMT2D47K-F	0.236 (6.0)	0.394 (10.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0068	DMT2D68K-F	0.236 (6.0)	0.394 (10.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0100	DMT2S1K-F	0.236 (6.0)	0.394 (10.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0150	DMT2S15K-F	0.236 (6.0)	0.395 (10.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0220	DMT2S22K-F	0.275 (7.0)	0.433 (11.0)	0.512 (13.0)	0.394 (10.0)	0.024 (0.6)	6000
0.0330	DMT2S33K-F	0.295 (7.5)	0.453 (11.0)	0.694 (17.6)	0.545 (13.8)	0.024 (0.6)	3000
0.0470	DMT2S47K-F	0.295 (7.5)	0.472 (12.0)	0.694 (17.6)	0.545 (13.8)	0.024 (0.6)	3000
0.0680	DMT2S68K-F	0.335 (8.5)	0.512 (13.0)	0.694 (17.6)	0.545 (13.8)	0.032 (0.8)	3000
0.1000	DMT2P1K-F	0.354 (9.0)	0.512 (13.0)	0.820 (20.8)	0.670 (17.0)	0.032 (0.8)	2100
0.1500	DMT2P15K-F	0.394 (10.0)	0.571 (14.5)	0.820 (20.8)	0.670 (17.0)	0.032 (0.8)	2100
0.2200	DMT2P22K-F	0.413 (10.5)	0.630 (16.0)	0.945 (24.0)	0.795 (20.2)	0.032 (0.8)	2100
0.3300	DMT2P33K-F	0.492 (12.5)	0.689 (17.5)	0.945 (24.0)	0.795 (20.2)	0.032 (0.8)	2100
0.4700	DMT2P47K-F	0.531 (13.5)	0.728 (18.5)	1.110 (28.2)	0.920 (23.4)	0.032 (0.8)	1360
0.6800	DMT2P68K-F	0.630 (16.0)	0.827 (21.0)	1.132 (28.7)	0.984 (25.0)	0.032 (0.8)	1360
<b>400 Vdc (200 Vac)</b>							
0.0010	DMT4D1K-F	0.197 (5.0)	0.354 (9.0)	0.569 (14.4)	0.400 (10.2)	0.024 (0.6)	14400
0.0015	DMT4D15K-F	0.221 (5.6)	0.356 (9.0)	0.569 (14.4)	0.400 (10.2)	0.024 (0.6)	14400
0.0022	DMT4D22K-F	0.221 (5.6)	0.356 (9.0)	0.569 (14.4)	0.400 (10.2)	0.024 (0.6)	14400
0.0033	DMT4D33K-F	0.221 (5.6)	0.374 (9.5)	0.569 (14.4)	0.400 (10.2)	0.024 (0.6)	14400
0.0047	DMT4D47K-F	0.241 (6.1)	0.394 (10.0)	0.569 (14.4)	0.400 (10.2)	0.024 (0.6)	14400
0.0068	DMT4D68K-F	0.286 (7.3)	0.411 (10.4)	0.569 (14.4)	0.400 (10.2)	0.024 (0.6)	14400
0.0100	DMT4S1K-F	0.331 (8.4)	0.456 (11.6)	0.569 (14.4)	0.400 (10.2)	0.032 (0.8)	14400
0.0150	DMT4S15K-F	0.368 (9.3)	0.534 (13.6)	0.569 (14.4)	0.400 (10.2)	0.032 (0.8)	14400
0.0220	DMT4S22K-F	0.328 (8.3)	0.479 (12.2)	0.694 (17.6)	0.545 (13.8)	0.032 (0.8)	7200
0.0330	DMT4S33K-F	0.388 (9.9)	0.539 (13.7)	0.694 (17.6)	0.545 (13.8)	0.032 (0.8)	7200
0.0470	DMT4S47K-F	0.338 (8.6)	0.534 (13.6)	0.882 (22.4)	0.733 (18.6)	0.032 (0.8)	4100
0.0680	DMT4S68K-F	0.397 (10.1)	0.593 (15.1)	0.882 (22.4)	0.733 (18.6)	0.032 (0.8)	4100
0.1000	DMT4P1K-F	0.472 (12.0)	0.668 (17.0)	0.882 (22.4)	0.733 (18.6)	0.032 (0.8)	4100
0.1500	DMT4P15K-F	0.408 (10.4)	0.810 (20.6)	1.069 (27.1)	0.920 (23.4)	0.032 (0.8)	2900
0.2200	DMT4P22K-F	0.418 (10.6)	0.811 (20.6)	1.319 (33.5)	1.170 (29.7)	0.032 (0.8)	2100
0.3300	DMT4P33K-F	0.415 (10.5)	0.844 (21.4)	1.569 (39.8)	1.420 (36.1)	0.032 (0.8)	2100
0.4700	DMT4P47K-F	0.541 (13.7)	0.934 (23.7)	1.569 (39.8)	1.420 (36.1)	0.032 (0.8)	2100
<b>600/630 Vdc (250 Vac)</b>							
0.0010	DMT6D1K-F	0.218 (5.5)	0.326 (8.3)	0.694 (17.6)	0.545 (13.8)	0.024 (0.6)	15000
0.0015	DMT6D15K-F	0.221 (5.6)	0.329 (8.4)	0.694 (17.6)	0.545 (13.8)	0.024 (0.6)	15000
0.0022	DMT6D22K-F	0.251 (6.4)	0.359 (9.1)	0.694 (17.6)	0.545 (13.8)	0.024 (0.6)	15000
0.0033	DMT6D33K-F	0.251 (6.4)	0.376 (9.5)	0.694 (17.6)	0.545 (13.8)	0.032 (0.8)	15000
0.0047	DMT6D47K-F	0.284 (7.2)	0.409 (10.4)	0.694 (17.6)	0.545 (13.8)	0.032 (0.8)	15000

# Type DMT, Polyester Film Capacitors

RoHS Compliant

Cap. ( $\mu$ F)	Catalog Part Number	T Inches (mm)	H Inches (mm)	L Inches (mm)	S Inches (mm)	d Inches (mm)	dV/dt V/ $\mu$ s
<b>600/630 Vdc (250 Vac)</b>							
0.0068	DMT6D68K-F	0.313 (7.9)	0.464 (11.8)	0.694 (17.6)	0.545 (13.8)	0.032 (0.8)	15000
0.0100	DMT6S1K-F	0.364 (9.2)	0.515 (13.1)	0.694 (17.6)	0.545 (13.8)	0.032 (0.8)	15000
0.0150	DMT6S15K-F	0.342 (8.7)	0.508 (12.9)	0.820 (20.8)	0.670 (17.0)	0.032 (0.8)	7400
0.0220	DMT6S22K-F	0.402 (10.2)	0.568 (14.4)	0.820 (20.8)	0.670 (17.0)	0.032 (0.8)	7400
0.0330	DMT6S33K-F	0.443 (11.2)	0.609 (15.5)	0.882 (22.4)	0.733 (18.6)	0.032 (0.8)	7400
0.0470	DMT6S47K-F	0.519 (13.2)	0.685 (17.4)	0.882 (22.4)	0.733 (18.6)	0.032 (0.8)	7400
0.0680	DMT6S68K-F	0.453 (11.5)	0.649 (16.5)	1.194 (30.3)	1.045 (26.5)	0.032 (0.8)	4000
0.1000	DMT6P1K-F	0.541 (13.7)	0.737 (18.7)	1.194 (30.3)	1.045 (26.5)	0.032 (0.8)	4000
0.1500	DMT6P15K-F	0.656 (16.7)	0.926 (23.5)	1.194 (30.3)	1.045 (26.5)	0.032 (0.8)	4000
0.2200	DMT6P22K-F	0.630 (16.0)	1.024 (26.0)	1.444 (36.7)	1.295 (32.9)	0.032 (0.8)	3000
0.3300	DMT6P33K-F	0.650 (16.5)	1.010 (25.6)	1.819 (46.2)	1.670 (42.4)	0.032 (0.8)	3000
0.4700	DMT6P47K-F	0.739 (18.8)	1.132 (28.7)	1.819 (46.2)	1.670 (42.4)	0.032 (0.8)	3000