


### Features:

- ✓ Small size, minimal footprint/low profile
- ✓ 10A Output Current (all voltages)
- ✓ High Efficiency: up to 95%
- ✓ High reliability
- ✓ RoHS Compliant
- ✓ Cost efficient open frame design
- ✓ Pre-bias monotonic start-up
- ✓ +ve Enable Logic and -ve Enable Logic models available



| Output   |          |              |      | Input          |         |              |           | Efficiency  |           |
|----------|----------|--------------|------|----------------|---------|--------------|-----------|-------------|-----------|
| Vout (V) | Iout (A) | PARD (mVp-p) |      | Regulation Max |         | Vin Nom. (V) | Range (V) | Iin TYP (A) | Full Load |
|          |          | Typ.         | Max. | Line           | Load    |              |           |             | Typ.      |
| 1.0      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 0.992       | 84%       |
| 1.2      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 1.163       | 86%       |
| 1.5      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 1.404       | 89%       |
| 1.8      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 1.666       | 90%       |
| 2.0      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 1.832       | 91%       |
| 2.5      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 2.264       | 92%       |
| 3.3      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 2.956       | 93%       |
| 5.0      | 10       | 30           | 50   | +/-0.2%        | +/-0.5% | 12           | 8.3 – 14  | 4.385       | 95%       |

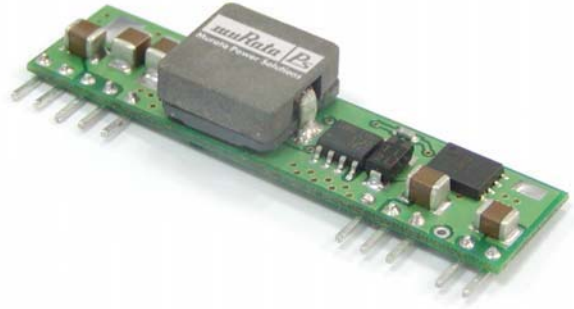

| Input Characteristics          | Notes & Conditions   | Min | Typ. | Max | Units            |
|--------------------------------|----------------------|-----|------|-----|------------------|
| Input Voltage Operating Range  |                      | 8.3 | 12   | 14  | Vdc              |
| Input Reflected Ripple Current |                      |     | 200  |     | mA p-p           |
| Inrush Current Transient       |                      |     |      | 0.2 | A <sup>2</sup> s |
| Input Filter Type (external)   | Low ESR              |     | 100  |     | μF               |
| Input Turn ON Threshold        |                      |     | 8.5  |     | V                |
| Input Turn OFF Threshold       |                      |     | 8.0  |     | V                |
| ON Control                     | Open Circuit or =Vin |     |      |     |                  |
| OFF Control                    | <0.4VDC              |     |      |     |                  |

| Output Characteristics                   | Notes & Conditions                      | Min  | Typ. | Max  | Units |
|--|---|------|------|------|-------|
| Vout Accuracy                            | 100% load                               | -1.5 |      | +1.5 | %     |
| Output Loading                           |   | 0    |      | 10   | A     |
| Output Ripple & Noise @ 20Mhz Bandwidth. |   |      |      | 50   | MVp-p |
| Maximum Capacitive Load                  | Low ESR                                 |      |      | 8000 | μF    |
| Vout Trim Range                          |   | -10  |      | +10  | %     |
| Total Accuracy                           | Over line/load temperature              |      | <2%  |      |       |
| Current Limit                            |   |      | 17   |      | A     |
| Output Line Regulation                   |   | -0.2 |      | +0.2 | %     |
| Output Load Regulation                   |   | +0.5 |      | -0.5 | %     |
| Turn-on Overshoot                        |   |      |      | 1    | %     |
| SC Protection Technique                  | Hiccup with auto recovery               |      |      |      |       |
| Pre-bias Start-up at output              | Unit starts monotonically with pre-bias |      |      |      |       |

| Dynamic Characteristics | Notes & Conditions                                       | Min | Typ. | Max | Units |
|-------------------------|--|-----|------|-----|-------|
| Load Transient          | 50% step, 0.1A/μs  |     |      | 100 | mV    |
|                         | Settling Time  |     |      | 200 | μs    |
| Frequency               |  |     | 300  |     | KHz   |
| Rise Time               | 10% Vo to 90% Vo   |     | 3.5  |     | ms    |
| Start-Up Time           | Vin to Vout and On/Off to Vout<br>Vout rise to monotonic |     | 7    |     | ms    |

| General Specifications        | Notes & Conditions                       | Min | Typ. | Max | Units                |
|-------------------------------|--|-----|------|-----|----------------------|
| MTBF                          | Calculated (MIL-HDBK-217F)               |     | 1.0  |     | x10 <sup>6</sup> Hrs |
| Thermal Protection            | Hotspot                                  |     | 110  |     | °C                   |
| Operating Temperature         | Without derating 100LFM                  | -40 |      | 60  | °C                   |
| Operating Ambient Temperature | See Power derating curve                 | -40 |      | 85  | °C                   |
| Dimensions                    | 2"Lx0.327"Wx0.512"H<br>(50.8x8.3x13.0mm) |     |      |     |                      |
| Pin Dimensions                | 0.025" (0.64mm) SQUARE                   |     | 0.64 |     | mm                   |
| Pin Material                  | Matte Sn Finish on component Leads       |     |      |     |                      |
| Weight                        |  |     | 10   |     | g                    |
| Flammability Rating           | UL94V-0                                  |     |      |     |                      |

| Standards Compliance  |
|---|
| CSA C22.2, No.60950/UL 60950, Third Edition (2000), File UL E165113 |

## Thermal Considerations

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. The thermal data presented is based on measurements taken in a set-up as shown in fig 1. when the airflow is parallel to the long axis of the module. The de-rating applies accordingly. The temperature at either location should not exceed 110 °C. The output power of the module should not exceed the rated power for the module (VO, set x IO, max).

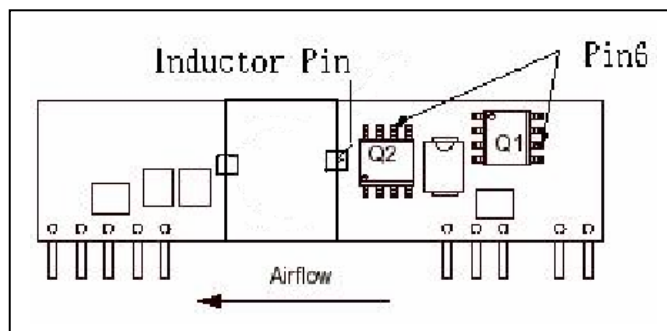


Figure 1: Thermal Measurement Setup

## Convection Requirements for Cooling

To predict the approximate cooling needed for the module, refer to the Power Derating Curve in Figure 2 to Figure 9.

These derating curve are approximations of the ambient temperature and airflow required to keep the power module temperature below it's maximum rating. Once the module is assembled in the actual system, the module's temperature should be verified.

Proper cooling can be verified by measuring the power module's temperature at Q1-pin 6 and Q2-pin 6 as shown in Figure 1.

### TYPICAL DERATING CURVES

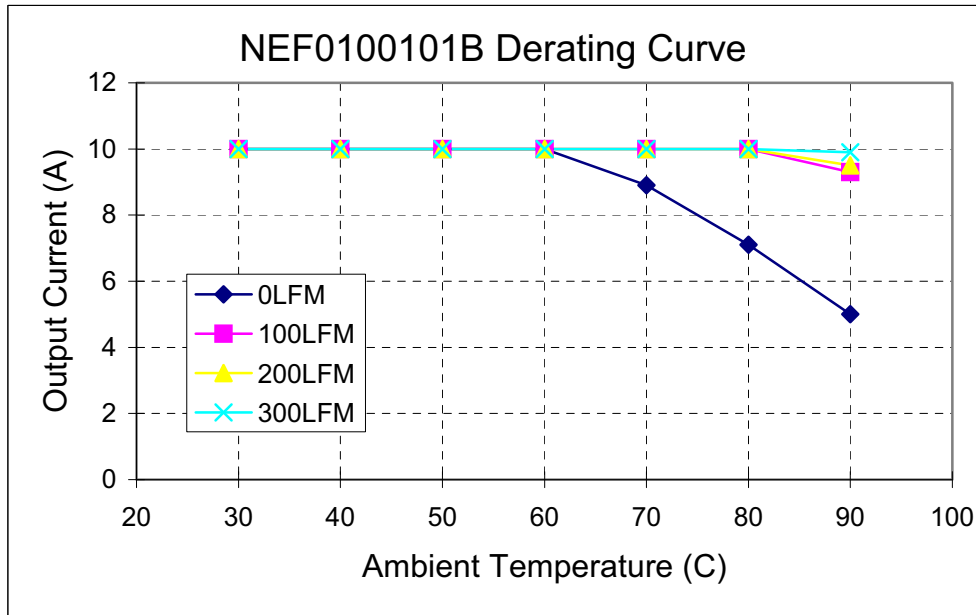


Figure 2. Typical Power Derating vs Output Current for 12Vi and 1.0Vo

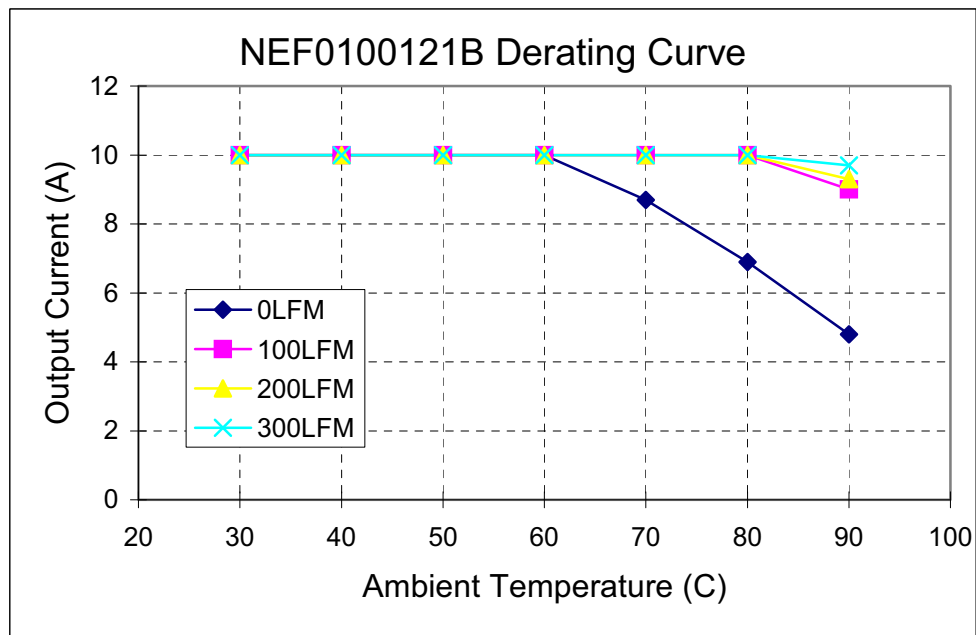


Figure 3. Typical Power Derating vs Output Current for 12Vi and 1.2Vo

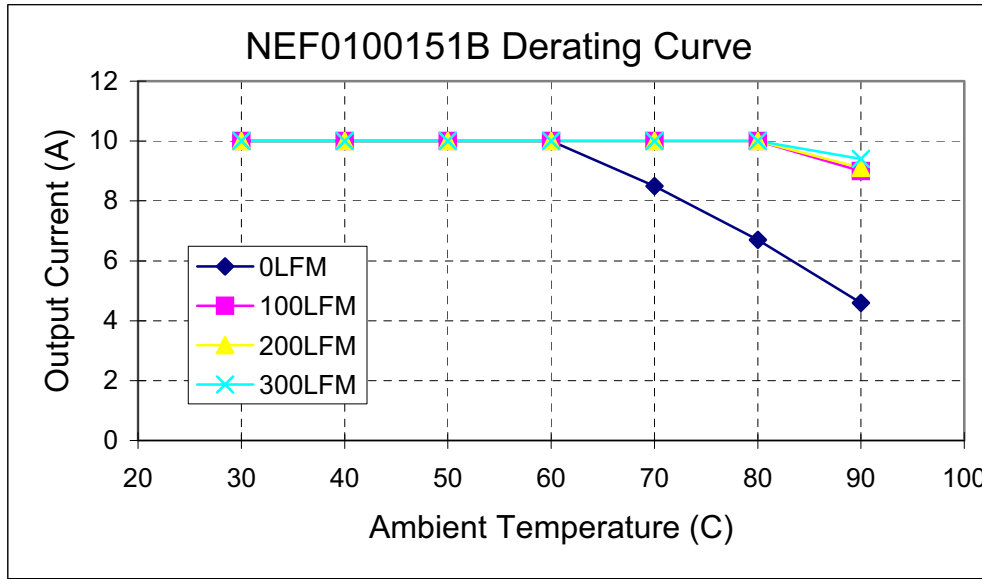


Figure 4. Typical Power Derating vs Output Current for 12Vi and 1.5Vo.

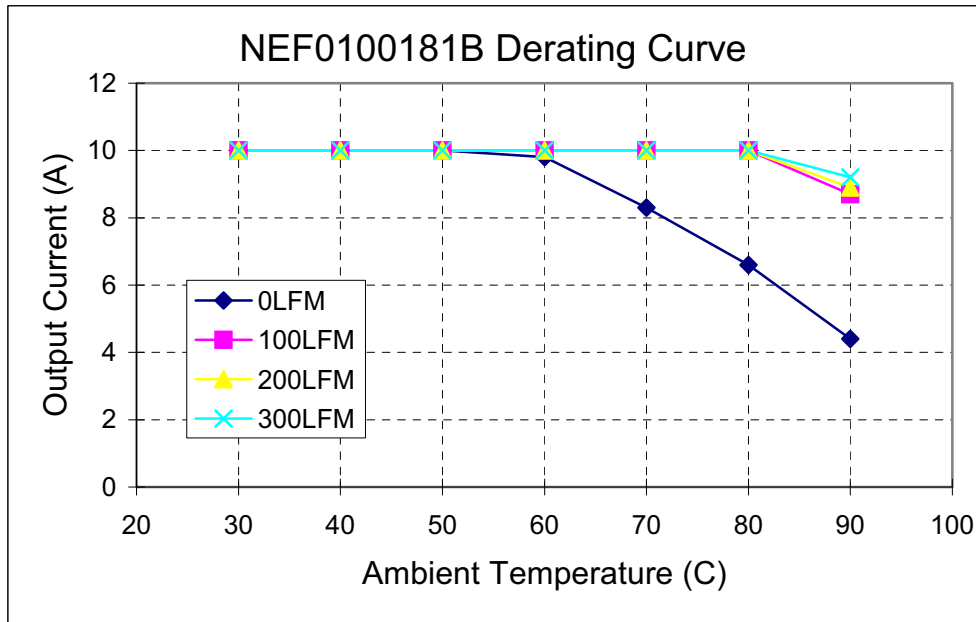


Figure 5. Typical Power Derating vs Output Current for 12Vi and 1.8Vo.

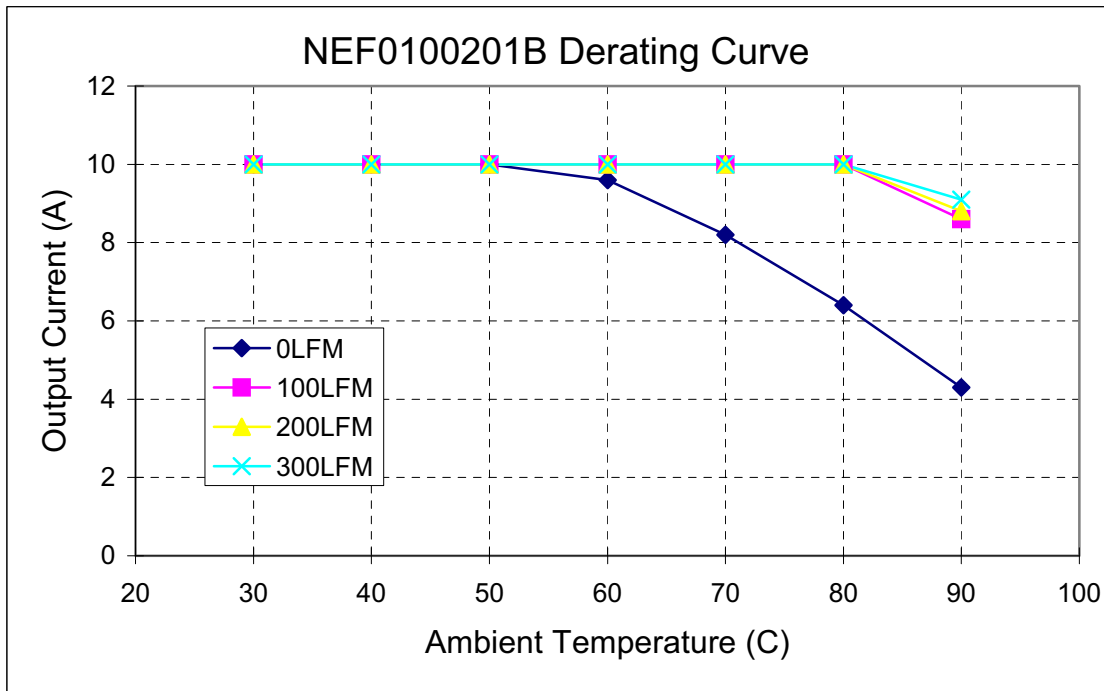


Figure 6. Typical Power Derating vs Output Current for 12Vi and 2.0Vo.

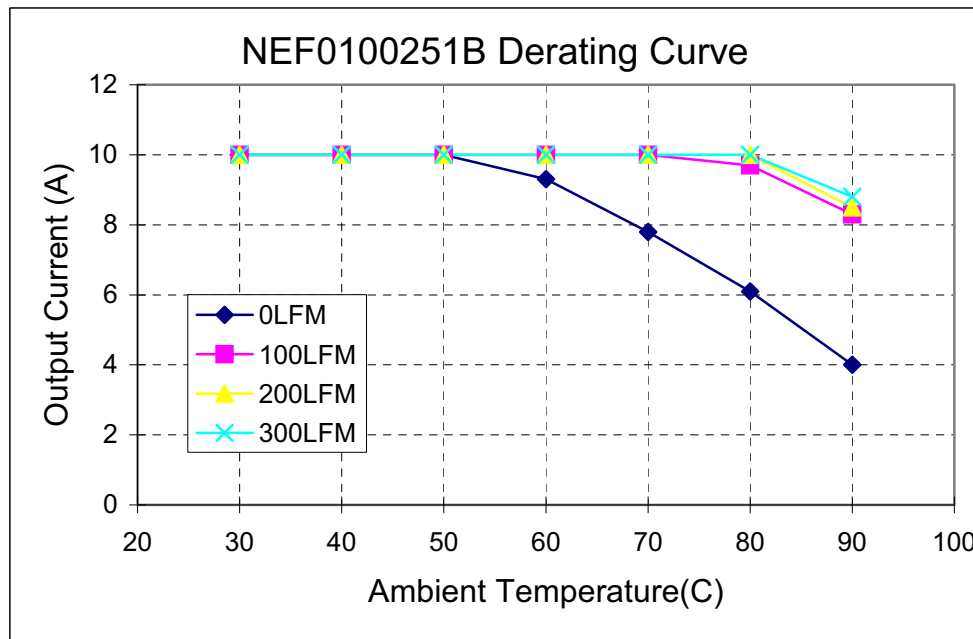


Figure 7. Typical Power Derating vs Output Current for 12Vi and 2.5Vo.

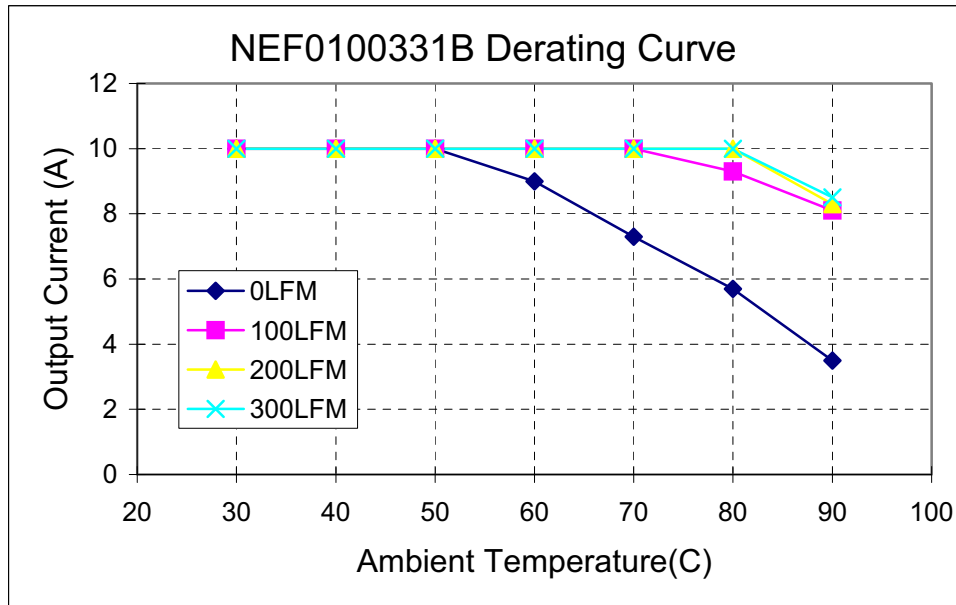


Figure 8. Typical Power Derating vs Output Current for 12Vi and 3.3Vo

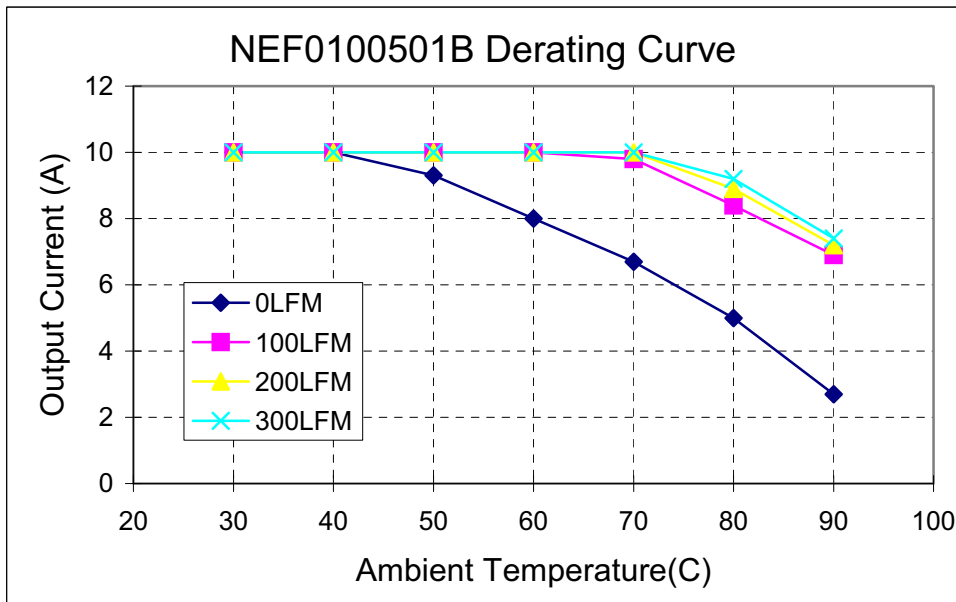


Figure 9. Typical Power Derating vs Output Current for 12Vi and 5.0Vo

### TYPICAL EFFICIENCY CURVES

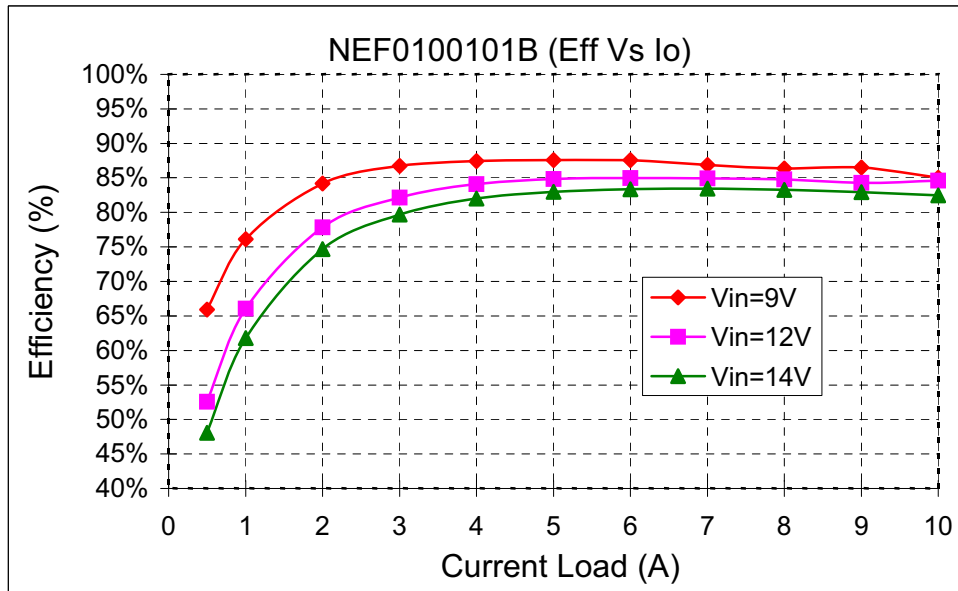


Figure 10. Efficiency Curves for Vout=1.0V (25C)

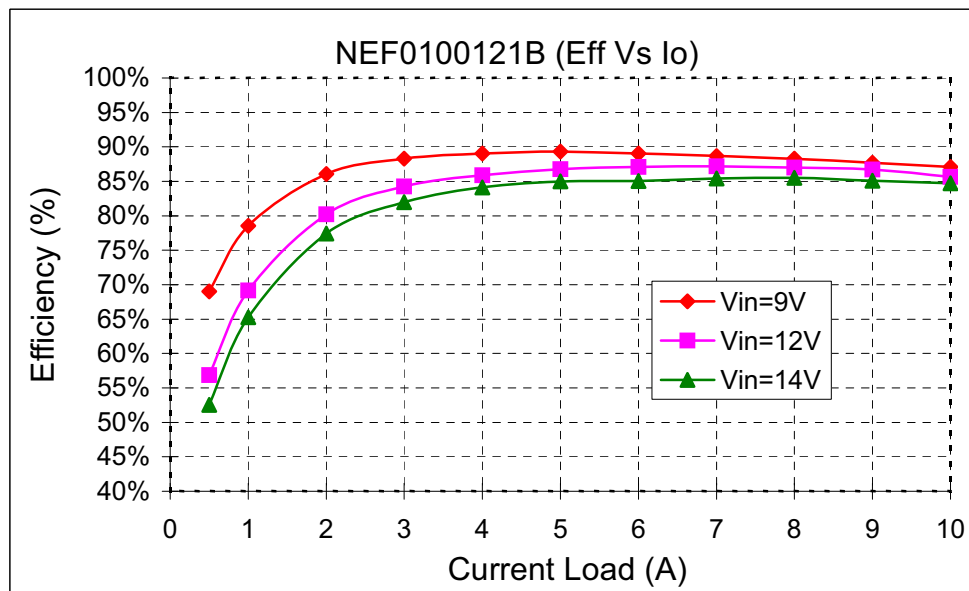


Figure 11. Efficiency Curves for Vout=1.2V (25C)



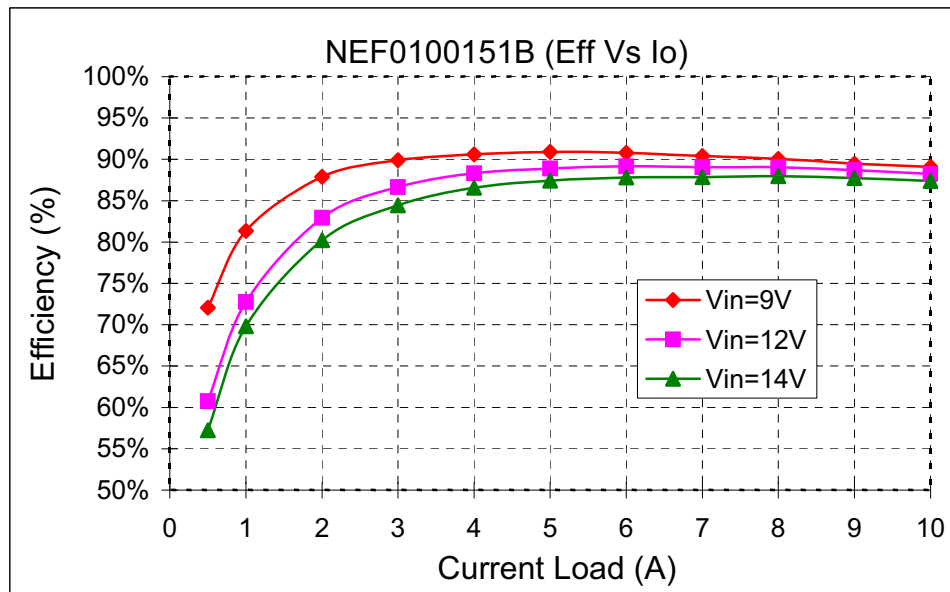


Figure 12. Efficiency Curves for Vout=1.5V (25C)

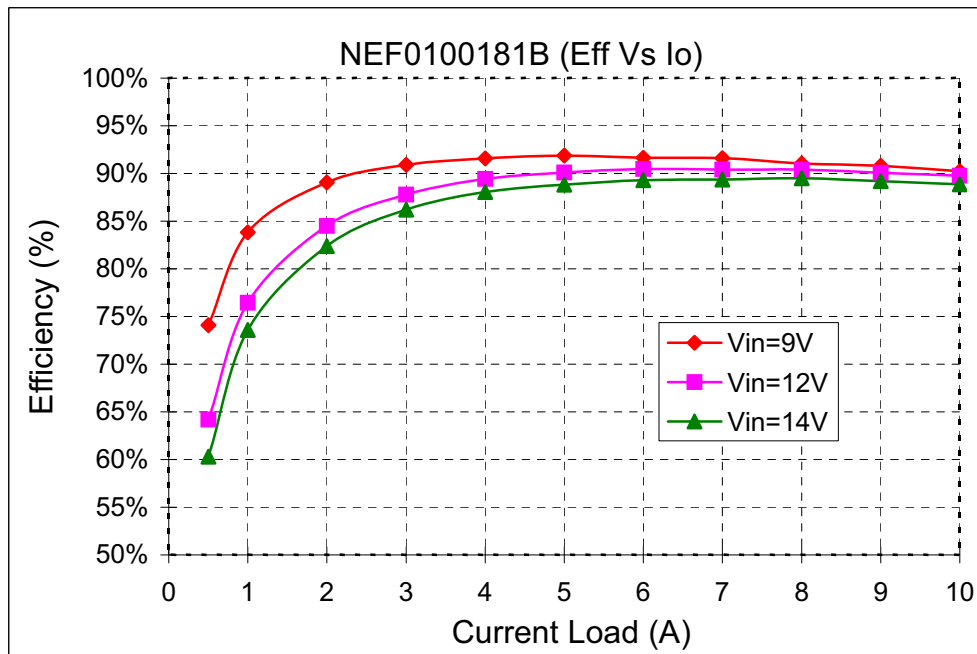


Figure 13. Efficiency Curves for Vout=1.8V (25C)

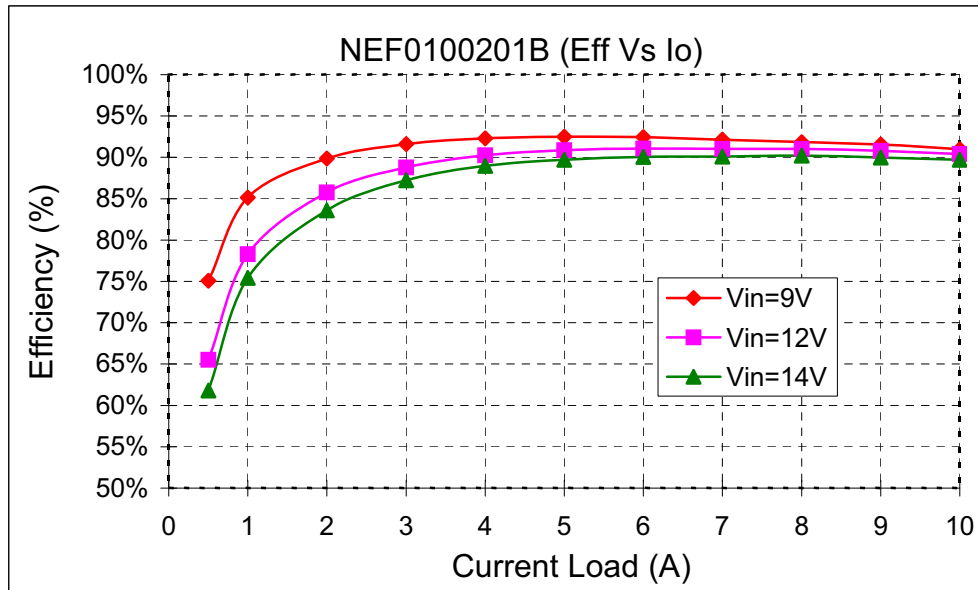


Figure 14. Efficiency Curves for Vout=2.0V (25C)

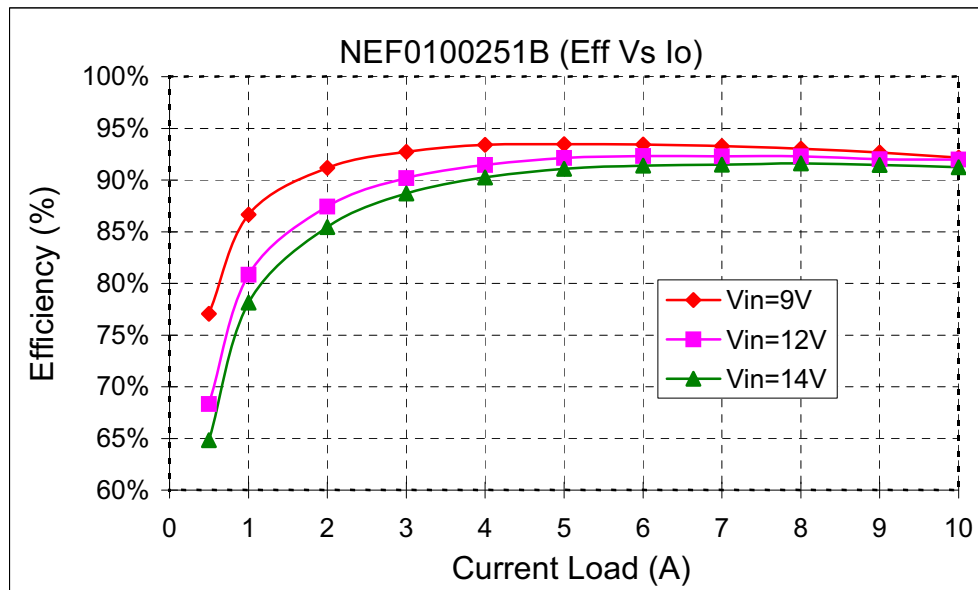


Figure 15. Efficiency Curves for Vout=2.5V (25C)

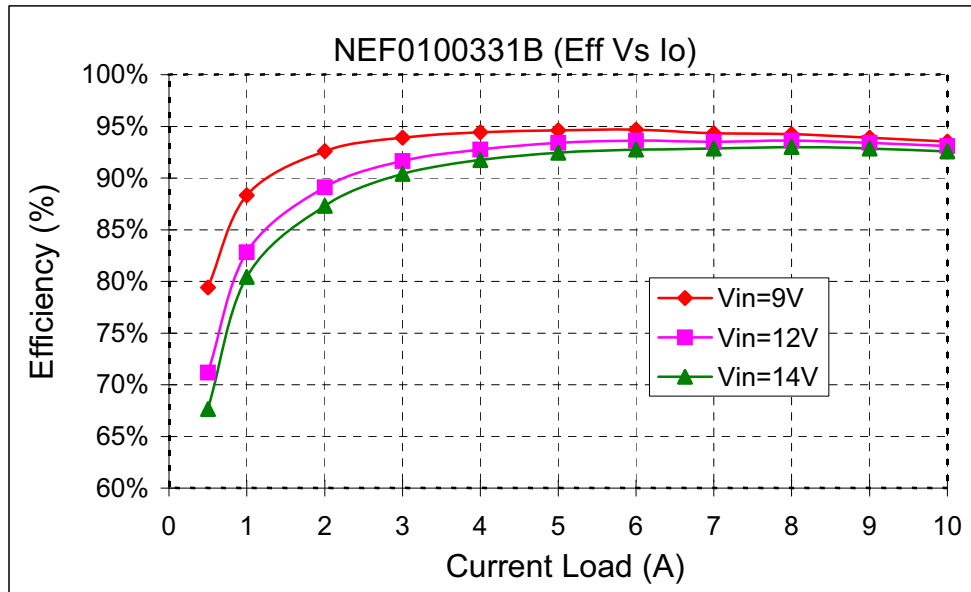


Figure 16. Efficiency Curves for Vout=3.3V (25C)


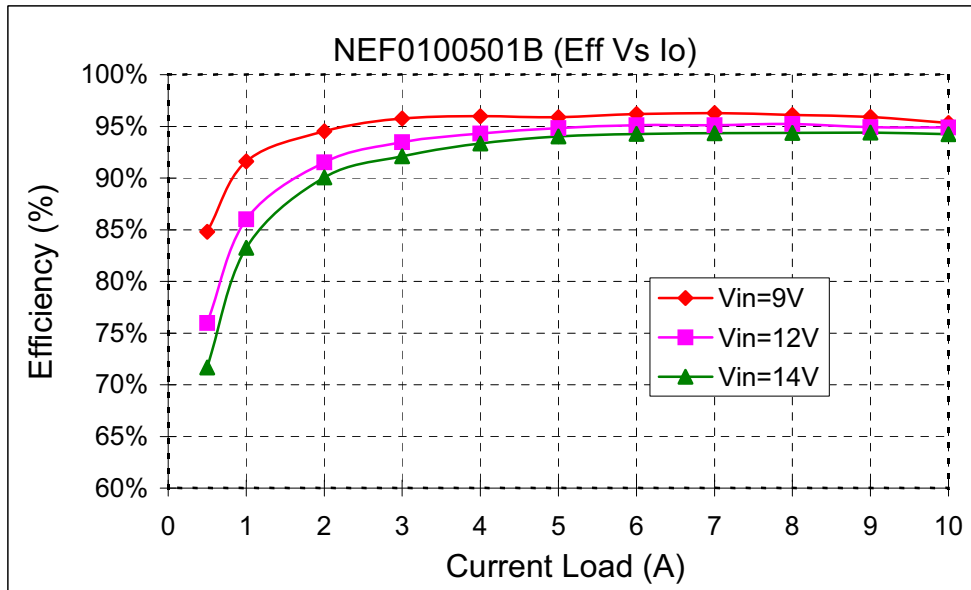


Figure 17. Efficiency Curves for Vout=5.0V (25C)


### Typical Start Up

Ch1 : Vin  
 Ch2 : Vout  
 Ch3 : Top Fet Vg  
 Ch4 : Bottom Fet Vg

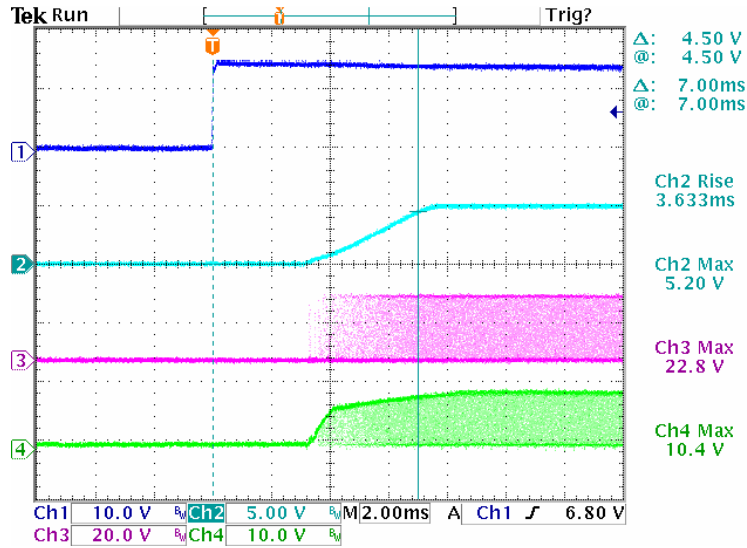

### Typical Start Up with pre-bias


Ch1 : Vin  
 Ch2 : Vout  
 Ch3 : Output Current

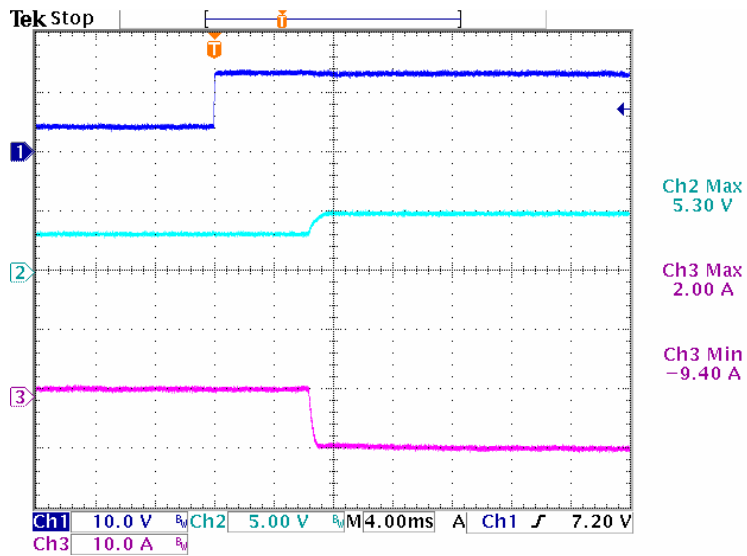

### Typical Output Noise and Ripple


$V_{in} = 12V_{dc}$  ,  $V_o = 5.0V/10A$

Output with 1uF ceramic and 10uF tantalum capacitor

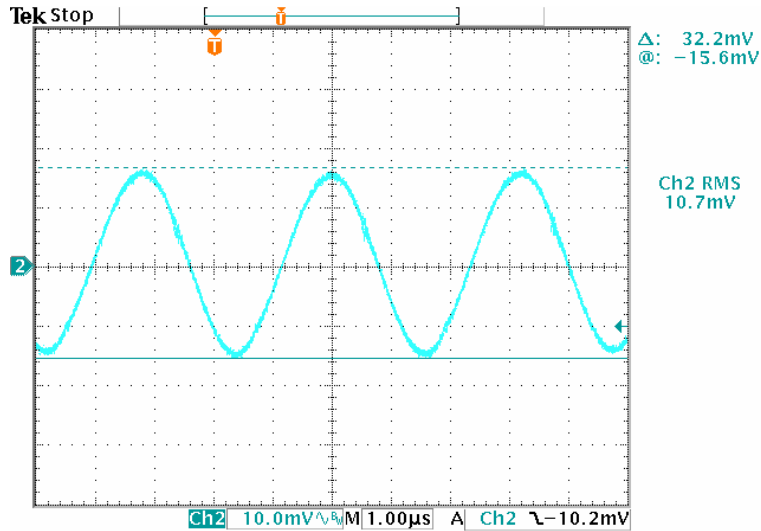

### Typical Output Transient Response

$V_{in} = 12V_{dc}$  ,  $V_o = 5.0V$  , 50% - 100% - 50% Load change , @0.1A/uS

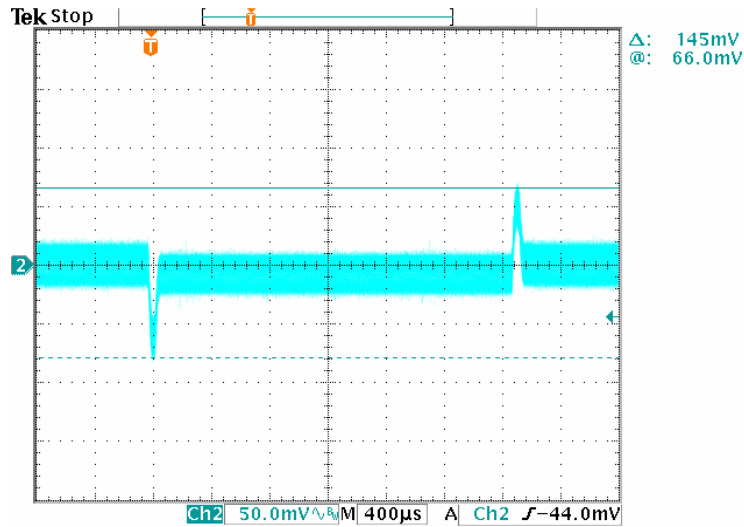

**Output Voltage Set point adjustment.**

The following relationship establish the calculation of external resistors for the NEF series:

**Trim-Up**

For trim\_Up an external resistor is connected between the TRIM and Ground Pin.

$$R_{trim - up} = \left( \frac{R1 \times 0.7}{V_o - V_{o, nom}} \right) - R_t \text{ (K}\Omega\text{)}$$

Where,

- Rt = 1 KΩ
- R1 = 15 KΩ
- Vo,nom is the nominal output voltage
- Vo is the desired output voltage

**Trim\_Down**

For trim down an external resistor is to be connected between TRIM and Vout pins of the module.

The value of Rtrim\_Down is calculated from the following relationship.

$$R_{trim - down} = \frac{R1 \times (V_o - 0.7)}{V_{o, nom} - V_o} - R_t \text{ (K}\Omega\text{)}$$

The values of R1 , Rt , Vo,num , Vo are as defined above.

Examples:

Vout = 1.5V Trim\_Up required 8% to 1.62V

$$V_o - V_{o,nom} = 1.62 - 1.5 = 0.12V$$

$$R_{trim - up} = \frac{15 \times 0.7}{0.12} - 1 = 86.5 \text{ (K}\Omega\text{)}$$

Vout = 1.5V Trim\_Down required 8% to 1.38V

$$V_{o,nom} - V_o = 1.5 - 1.38 = 0.12V$$

$$R_{trim - down} = \frac{15 \times (1.38 - 0.7)}{0.12} - 1 = 84 \text{ (K}\Omega\text{)}$$

The following relationship establish the calculation of external resistors for the NEA series:

$$R_{adj} = \left( \frac{15 \times 0.7}{V_o - 0.7525} \right) - 1 \text{ (K}\Omega\text{)}$$

For Vout setting an external resistor is connected between the TRIM and Ground Pin.


Resistor values for different output voltages are calculated as given in the table:

| Vo, set (Volts) | RAdj (KΩ) |
|-----------------|-----------|
| 0.75            | Open      |
| 1.2             | 22.46     |
| 1.5             | 13.05     |
| 1.8             | 9.024     |
| 2.0             | 7.417     |
| 2.5             | 5.009     |
| 3.3             | 3.122     |
| 5.0             | 1.472     |

**Remote Sense:**


All Murata Power Solutions SIP power modules offer an option for remote sense. The remote sense compensates for any distribution drops to accurately control voltage at the point of load. The voltage between the sense pin to Vout pin should not exceed 0.5V.

**SMT Lead free Reflow profile**

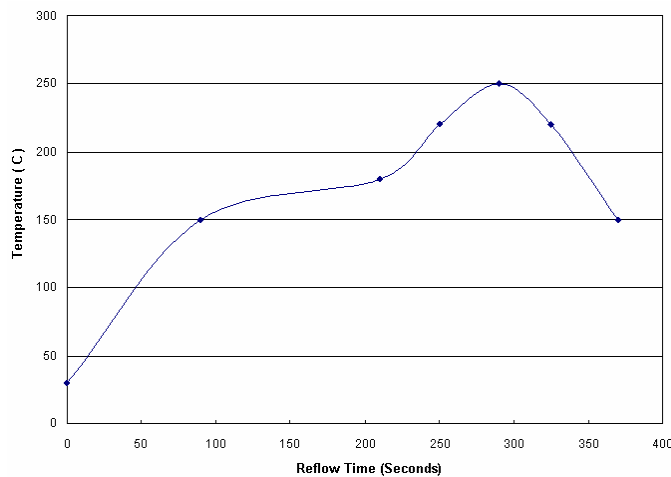

1. Ramp up rate during preheat : 1.33 °C/Sec ( From 30°C to 150°C )
2. Soaking temperature : 0.29 °C/Sec ( From 150°C to 180°C )
3. Ramp up rate during reflow : 0.8 °C/Sec ( From 220°C to 250°C )
4. Peak temperature : 250°C, above 220°C 40 to 70 Seconds
5. Ramp up rate during cooling : -1.56 °C/Sec ( From 220°C to 150°C )

### Mechanical Information

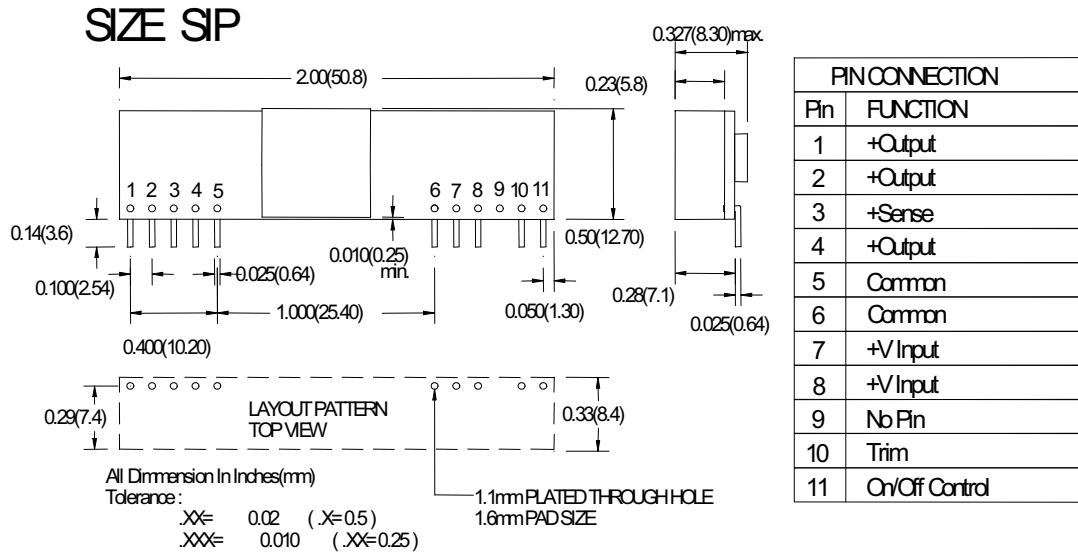

### Safety Considerations

The NEA/NEF series of converters are certified to IEC/EN/CSA/UL 60950. If this product is built into information technology equipment, the installation must comply with the above standard. An external input fuse (no more than 20 Amps, recommended) must be used to meet the above requirements. The output of the converter [Vo(+)/Vo(-)] is considered to remain within SELV limits when the input to the converter meets SELV or TNV-2 requirements. The converters and materials meet UL 94V-0 flammability ratings.



### Ordering Information

Note: SMT versions are also available. See applicable datasheet for details.

| Part Number   | Vin          | Vout         | Iout | Enable Logic | Pin Length |
|---------------|--------------|--------------|------|--------------|------------|
| NEF0100101B0C | 8.3V - 14.0V | 1.0V         | 10A  | Positive     | 0.139"     |
| NEF0100121B0C | 8.3V - 14.0V | 1.2V         | 10A  | Positive     | 0.139"     |
| NEF0100151B0C | 8.3V - 14.0V | 1.5V         | 10A  | Positive     | 0.139"     |
| NEF0100181B0C | 8.3V - 14.0V | 1.8V         | 10A  | Positive     | 0.139"     |
| NEF0100201B0C | 8.3V - 14.0V | 2.0V         | 10A  | Positive     | 0.139"     |
| NEF0100251B0C | 8.3V - 14.0V | 2.5V         | 10A  | Positive     | 0.139"     |
| NEF0100331B0C | 8.3V - 14.0V | 3.3V         | 10A  | Positive     | 0.139"     |
| NEF0100501B0C | 8.3V - 14.0V | 5.0V         | 10A  | Positive     | 0.139"     |
| NEF0100101S0C | 8.3V - 14.0V | 1.0V         | 10A  | Positive     | SMT        |
| NEF0100121S0C | 8.3V - 14.0V | 1.2V         | 10A  | Positive     | SMT        |
| NEF0100151S0C | 8.3V - 14.0V | 1.5V         | 10A  | Positive     | SMT        |
| NEF0100181S0C | 8.3V - 14.0V | 1.8V         | 10A  | Positive     | SMT        |
| NEF0100201S0C | 8.3V - 14.0V | 2.0V         | 10A  | Positive     | SMT        |
| NEF0100251S0C | 8.3V - 14.0V | 2.5V         | 10A  | Positive     | SMT        |
| NEF0100331S0C | 8.3V - 14.0V | 3.3V         | 10A  | Positive     | SMT        |
| NEF0100501S0C | 8.3V - 14.0V | 5.0V         | 10A  | Positive     | SMT        |
| NEF0100100B0C | 8.3V - 14.0V | 1.0V         | 10A  | Negative     | 0.139"     |
| NEF0100120B0C | 8.3V - 14.0V | 1.2V         | 10A  | Negative     | 0.139"     |
| NEF0100150B0C | 8.3V - 14.0V | 1.5V         | 10A  | Negative     | 0.139"     |
| NEF0100180B0C | 8.3V - 14.0V | 1.8V         | 10A  | Negative     | 0.139"     |
| NEF0100200B0C | 8.3V - 14.0V | 2.0V         | 10A  | Negative     | 0.139"     |
| NEF0100250B0C | 8.3V - 14.0V | 2.5V         | 10A  | Negative     | 0.139"     |
| NEF0100330B0C | 8.3V - 14.0V | 3.3V         | 10A  | Negative     | 0.139"     |
| NEF0100500B0C | 8.3V - 14.0V | 5.0V         | 10A  | Negative     | 0.139"     |
| NEF0100100S0C | 8.3V - 14.0V | 1.0V         | 10A  | Negative     | SMT        |
| NEF0100120S0C | 8.3V - 14.0V | 1.2V         | 10A  | Negative     | SMT        |
| NEF0100150S0C | 8.3V - 14.0V | 1.5V         | 10A  | Negative     | SMT        |
| NEF0100180S0C | 8.3V - 14.0V | 1.8V         | 10A  | Negative     | SMT        |
| NEF0100200S0C | 8.3V - 14.0V | 2.0V         | 10A  | Negative     | SMT        |
| NEF0100250S0C | 8.3V - 14.0V | 2.5V         | 10A  | Negative     | SMT        |
| NEF0100330S0C | 8.3V - 14.0V | 3.3V         | 10A  | Negative     | SMT        |
| NEF0100500S0C | 8.3V - 14.0V | 5.0V         | 10A  | Negative     | SMT        |
| NEA0101500B0C | 8.3V - 14.0V | 0.75V – 5.0V | 10A  | Negative     | 0.139"     |
| NEA0101500S0C | 8.3V - 14.0V | 0.75V – 5.0V | 10A  | Negative     | SMT        |
| NEA0101501B0C | 8.3V - 14.0V | 0.75V – 5.0V | 10A  | Positive     | 0.139"     |
| NEA0101501S0C | 8.3V - 14.0V | 0.75V – 5.0V | 10A  | Positive     | SMT        |


**NOT RECOMMENDED  
FOR NEW DESIGNS**

**Recommended Alternatives:**

- NEA0101500B0C > OKX-T/10-D12N-C
- NEA0101500S0C > OKY-T/10-D12N-C
- NEA0101501B0C > OKX-T/10-D12P-C
- NEA0101501S0C > OKY-T/10-D12P-C



### Label Information

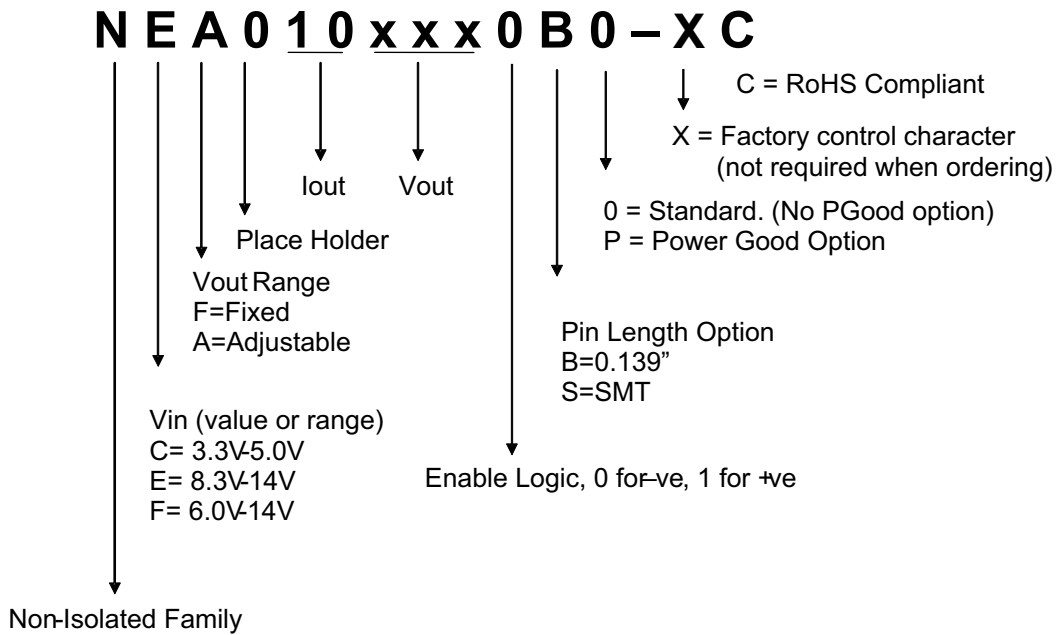

### RoHS Compliant

The NEA/NEF010 series of converters is in compliance with the European Union Directive 2002/95/EC (RoHS) with respect to the following substances: lead (Pb), mercury (Hg), cadmium (Cd), hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).