

■ Features :

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- With DC OK Signal output
- Current sharing up to 2400W(3+1)
- Built-in remote ON-OFF control
- Built-in remote sense function
- Fixed switching frequency at PFC:88KHz PWM:100KHz
- 3 years warranty



**SPECIFICATION**

| MODEL                 | PSP-600-5                    | PSP-600-12  | PSP-600-13.5 | PSP-600-15   | PSP-600-24 | PSP-600-27   | PSP-600-48 |              |
|-----------------------|------------------------------|---|--------------|--------------|------------|--------------|------------|--------------|
| OUTPUT                | DC VOLTAGE                   | 5V  | 12V          | 13.5V        | 15V        | 24V          | 27V        | 48V          |
|                       | RATED CURRENT                | 80A   | 50A          | 44.5A        | 40A        | 25A          | 22.2A      | 12.5A        |
|                       | CURRENT RANGE                | 0 ~ 80A   | 0 ~ 50A      | 0 ~ 44.5A    | 0 ~ 40A    | 0 ~ 25A      | 0 ~ 22.2A  | 0 ~ 12.5A    |
|                       | RATED POWER                  | 400W  | 600W         | 600W         | 600W       | 600W         | 600W       | 600W         |
|                       | RIPPLE & NOISE (max.) Note.2 | 180mVp-p  | 240mVp-p     | 240mVp-p     | 240mVp-p   | 240mVp-p     | 240mVp-p   | 300mVp-p     |
|                       | VOLTAGE ADJ. RANGE           | 4.75 ~ 5.5V   | 10 ~ 13.2V   | 12 ~ 15V     | 13.5 ~ 18V | 20 ~ 26.4V   | 24 ~ 30V   | 41 ~ 56V     |
|                       | VOLTAGE TOLERANCE Note.3     | ±2.0%   | ±1.0%        | ±1.0%        | ±1.0%      | ±1.0%        | ±1.0%      | ±1.0%        |
|                       | LINE REGULATION              | ±0.5%   | ±0.5%        | ±0.5%        | ±0.5%      | ±0.5%        | ±0.5%      | ±0.5%        |
|                       | LOAD REGULATION              | ±1.0%   | ±0.5%        | ±0.5%        | ±0.5%      | ±0.5%        | ±0.5%      | ±0.5%        |
|                       | SETUP, RISE TIME             | 1500ms, 50ms at full load   |              |              |            |              |            |              |
| HOLD UP TIME (Typ.)   | 20ms at full load            |   |              |              |            |              |            |              |
| INPUT                 | VOLTAGE RANGE Note.5         | 88 ~ 264VAC   | 124 ~ 370VDC |              |            |              |            |              |
|                       | FREQUENCY RANGE              | 47 ~ 63Hz   |              |              |            |              |            |              |
|                       | POWER FACTOR (Typ.)          | 0.95/230VAC 0.99/115VAC at full load  |              |              |            |              |            |              |
|                       | EFFICIENCY(Typ.)             | 79%   | 84%          | 85%          | 85%        | 86%          | 86%        | 87%          |
|                       | AC CURRENT (Typ.)            | 6.8A/115VAC   | 3.4A/230VAC  |              |            |              |            |              |
|                       | INRUSH CURRENT (Typ.)        | 20A/115VAC  |              | 40A/230VAC   |            |              |            |              |
| LEAKAGE CURRENT       | <1.3mA/240VAC                |   |              |              |            |              |            |              |
| PROTECTION            | OVERLOAD                     | 105 ~ 135% rated output power<br>Protection type : Constant current limiting, recovers automatically after fault condition is removed   |              |              |            |              |            |              |
|                       | OVER VOLTAGE                 | 5.75 ~ 6.75V  | 13.8 ~ 16.2V | 15.5 ~ 18.2V | 18 ~ 21V   | 27.6 ~ 32.4V | 31 ~ 36.5V | 57.6 ~ 67.2V |
|                       | OVER TEMPERATURE             | +5V: 95°C (TSW1) detect on heatsink of power transistor; 95°C (TSW51) detect on heatsink of power diode<br>+12V ~ +48V: 85°C (TSW1) detect on heatsink of power transistor; 80°C (TSW51) detect on heatsink of power diode<br>Protection type : Shut down o/p voltage, re-power on to recover   |              |              |            |              |            |              |
| FUNCTION              | REMOTE CONTROL               | RC+/RC-: Short = power on ; Open = power off  |              |              |            |              |            |              |
|                       | POK SIGNAL                   | PSU turn on: 3.3V ~ 5.6V PSU turn off: 0V ~ 1V  |              |              |            |              |            |              |
| ENVIRONMENT           | WORKING TEMP.                | -20 ~ +60°C (Refer to output load derating curve)   |              |              |            |              |            |              |
|                       | WORKING HUMIDITY             | 20 ~ 90% RH non-condensing  |              |              |            |              |            |              |
|                       | STORAGE TEMP., HUMIDITY      | -40 ~ +85°C, 10 ~ 95% RH  |              |              |            |              |            |              |
|                       | TEMP. COEFFICIENT            | ±0.03%/°C (0 ~ 50°C)  |              |              |            |              |            |              |
|                       | VIBRATION                    | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes   |              |              |            |              |            |              |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS             | UL60950-1, TUV EN60950-1 approved   |              |              |            |              |            |              |
|                       | WITHSTAND VOLTAGE            | I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC   |              |              |            |              |            |              |
|                       | ISOLATION RESISTANCE         | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH  |              |              |            |              |            |              |
|                       | EMI CONDUCTION & RADIATION   | Compliance to EN55022 (CISPR22) Class B   |              |              |            |              |            |              |
|                       | HARMONIC CURRENT             | Compliance to EN61000-3-2,-3  |              |              |            |              |            |              |
| OTHERS                | EMS IMMUNITY                 | Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, light industry level, criteria A  |              |              |            |              |            |              |
|                       | MTBF                         | 116.4K hrs min. MIL-HDBK-217F (25°C)  |              |              |            |              |            |              |
|                       | DIMENSION                    | 170*120*93mm (L*W*H)  |              |              |            |              |            |              |
| NOTE                  | PACKING                      | 1.9Kg; 8pcs/15.5Kg/1.06CUFT   |              |              |            |              |            |              |
|                       |                              | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a>)</li> <li>5. Derating may be needed under low input voltages. Please check the derating curve for more details.</li> </ol> |              |              |            |              |            |              |

## Mechanical Specification




Case No.910A Unit:mm

RS Connector(CN5) : JST B-XH or equivalent


| Pin No. | Assignment | Mating Housing        | Terminal                   |
|---------|------------|-----------------------|----------------------------|
| 1       | RS+        | JST XHP or equivalent | JST SXH-001T or equivalent |
| 2       | RS-        |                       |                            |

Terminal Pin No. Assignment


| Pin No. | Assignment       |
|---------|------------------|
| 1       | AC/L             |
| 2       | AC/N             |
| 3       | FG $\perp$       |
| 4       | P(Current Share) |
| 5       | POK              |
| 6       | R.C.G            |
| 7       | R.C.             |
| 8~11    | DC OUTPUT +V     |
| 12~15   | DC OUTPUT -V     |

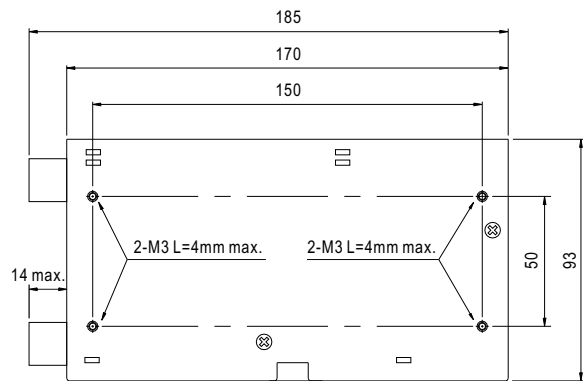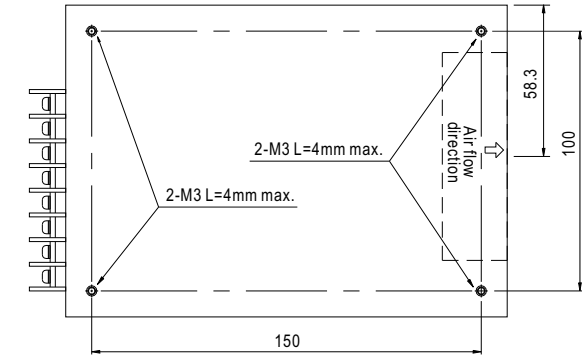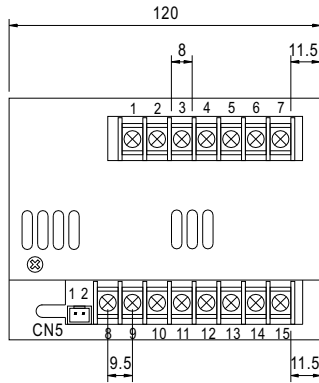


## Block Diagram

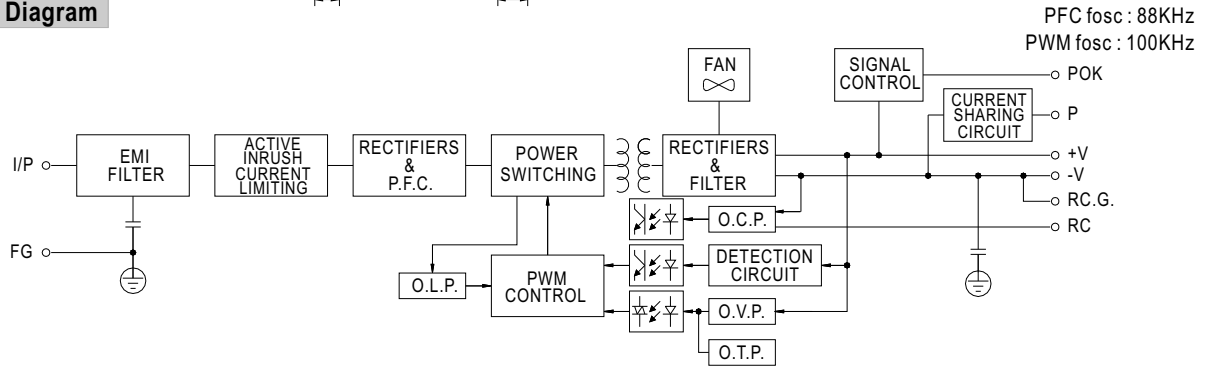


## Derating Curve

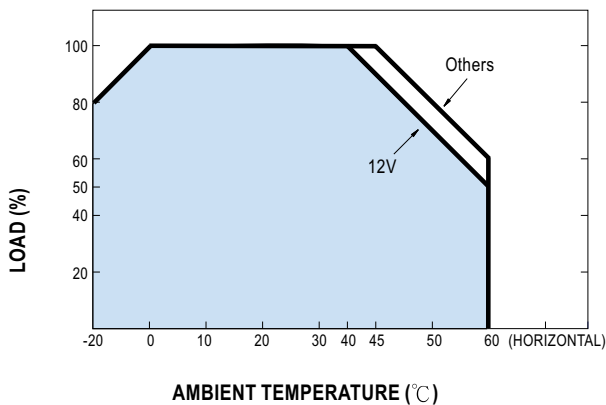

## Output Derating VS Input Voltage

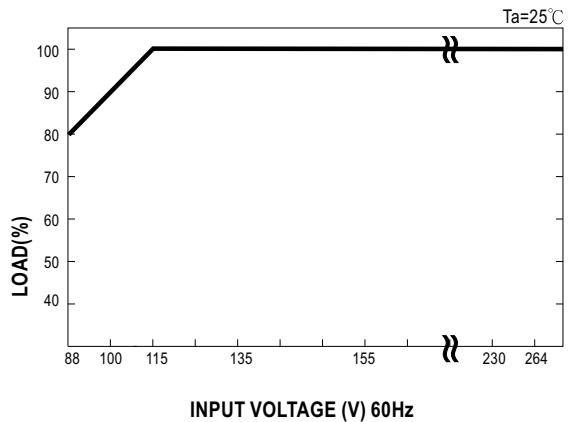


**Control Terminal Instruction Manual**

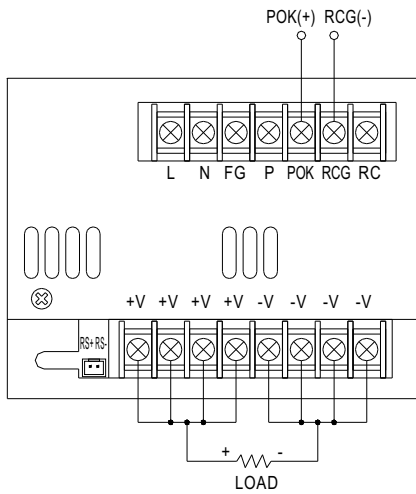


**POK Signal**

POK Signal is the voltage difference between "RCG" and "POK" pin output POK Signal for TTL level signal  
 PSU turn on: 3.3V ~ 5.6V  
 PSU turn off: 0V ~ 1V

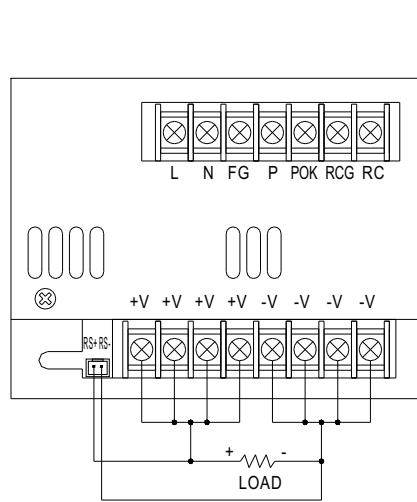

**Remote Sensing**

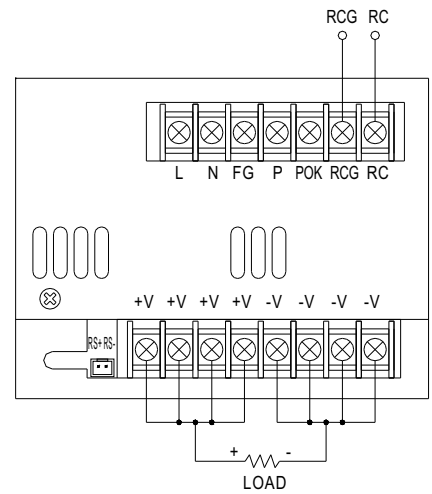

**Remote Control**

Power ON: RCG and RC for short  
 Power OFF: RCG and RC for open

**Parallel Operation with Remote Sensing**

- (1) Parallel operation is available by connecting the units shown as below (+S, -S and P are connected mutually in parallel) :
- (2) The voltage difference among each output should be minimized that less than  $\pm 2\%$  is required.
- (3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)  

$$= (\text{The rated current per unit}) \times (\text{Number of unit}) \times 0.9.$$
- (4) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (5) When remote sensing is used in parallel operation, the sensing wire must be connected only to the master unit.
- (6) When in parallel operation, the minimum output load should be greater than 3% of total output load.  
 (Min. load > 3% rated current per unit x number of unit)

