



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.


**MARKETING SALES DRAWING**

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

ALL METAL PARTS SILVER PLATED

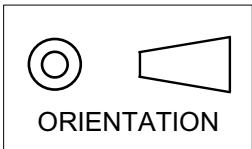


**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

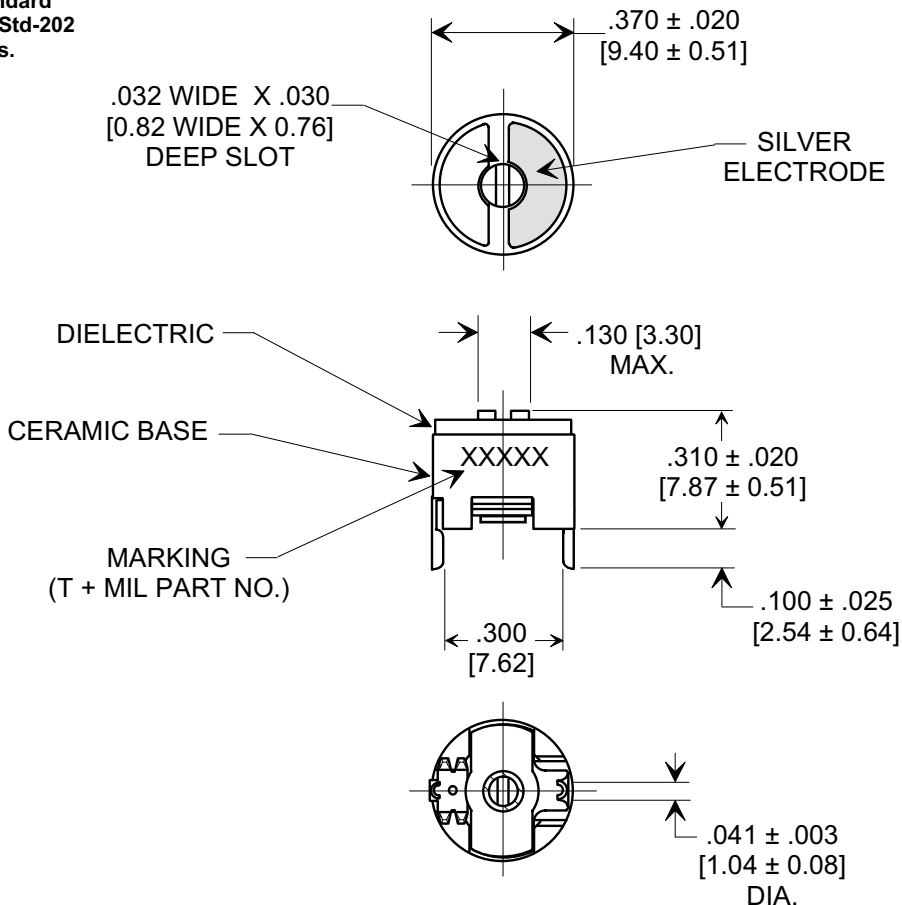

**SPECIFICATIONS**

TUSONIX STYLE	538-054
Capacitance Range:	8.0 - 25 pF
Capacitance Tolerance:	MIN: +0% , MAX: -0, +50%
Temperature Characteristic:	DIELECTRIC CODE C
Working Voltage:	350 VDC AT + 85°C
Operating Temperature Range:	-55°C TO + 125°C
To MIL - C - 81/4E CV31C250	



X-2015 Rev-0 REVISION RECORD Original Release C.O. <b>ECO-669</b>	<b>A</b>	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± $\frac{\quad}{\quad}$ 3 PLC. DECIMAL ± .010 [0.25]	Title		<b>CERAMIC TRIMMER</b>	
	ANGLES ± $\frac{\quad}{\quad}$		Drawn	L.E. 04-16-09		Scale
	<b>TUSONIX</b> TUCSON, ARIZONA		Approved		R.L. 04-16-09	
	<b>A</b>		<b>538-054 C 8.0 - 25</b>			