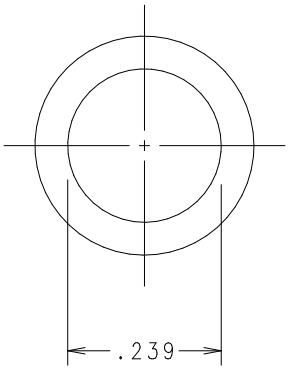



NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

LTR	REVISION
G	39107C- REVISED & REDRAWN ON NEW FORMAT 4/21/98 JMB
CHK	
APD	

COPIES TO

1 9 18
2 10 19
3 12 20
4 13 21
5 14 23
6 15 33
7 16 43
8 17 53

MATL SPEC: NEOPRENE (70 DUROMETER)
FINISH: BLACK

DRW	DATE	SCALE
JMB	3/2/98	4=1
CHK	DATE	SUPER DRW
APPD	DATE	RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED

TWO PLACE DEC	±.01	FRACTION	±
THREE PLACE DEC	±.005	ANGULAR	±1°

TITLE: RING WASHER

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION DRWG. NO.
-901-134

UNCONTROLLED DOCUMENT

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

Downloaded from Elcodis.com electronic components distributor