



- Monitoring relays - GAMMA series
- Monitoring of phase sequence and phase failure
- Detection of reverse voltage
- Connection of neutral wire optional
- Supply voltage = measuring voltage
- 2 change-over contacts
- Width 22.5mm
- Industrial design



## Technical data

### 1. Functions

Monitoring of phase sequence, phase failure and detection of return voltage (by means of evaluating the asymmetry)

### 2. Time ranges

Start-up suppression time:	fixed, max. 500ms
Tripping delay:	fixed, max. 350ms

### 3. Indicators

Green LED ON:	indication of supply voltage
Yellow LED ON/OFF:	indication of relay output

### 4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40  
 Mounted on DIN-Rail TS 35 according to EN 60715  
 Mounting position: any  
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20  
 Tightening torque: max. 1Nm  
 Terminal capacity:  
 1 x 0.5 to 2.5mm<sup>2</sup> with/without multicore cable end  
 1 x 4mm<sup>2</sup> without multicore cable end  
 2 x 0.5 to 1.5mm<sup>2</sup> with/without multicore cable end  
 2 x 2.5mm<sup>2</sup> flexible without multicore cable end

### 5. Input circuit

Supply voltage:	
3(N)~ 115/66V	terminals (N)-L1-L2-L3 (G2PF115VS02) (= measuring voltage)
3(N)~ 230/132V	terminals (N)-L1-L2-L3 (G2PF230VS02) (= measuring voltage)
3(N)~ 400/230V	terminals (N)-L1-L2-L3 (G2PF400VS02) (= measuring voltage)
Tolerance:	
3(N)~ 115/66V	3(N)~ 99 to 132V (G2PF115VS02)
3(N)~ 230/132V	3(N)~ 198 to 264V (G2PF230VS02)
3(N)~ 400/230V	3(N)~ 342 to 457V (G2PF400VS02)
Rated frequency:	48 to 63Hz
Rated consumption:	
3(N)~ 115/66V	3VA (G2PF115VS02)
3(N)~ 230/132V	6VA (G2PF230VS02)
3(N)~ 400/230V	9VA (G2PF400VS02)

Duration of operation:	100%
Reset time:	<100ms
Residual ripple for DC:	-
Drop-out voltage:	>20% of the supply voltage
Overvoltage category:	III (in accordance with IEC 60664-1)
Rated surge voltage:	4kV

### 6. Output circuit

2 potential free change-over contacts  
 Rated voltage: 250V AC  
 Switching capacity (distance <5mm): 750VA (3A / 250V AC)  
 Switching capacity (distance >5mm): 1250VA (5A / 250V AC)  
 Fusing: 5A fast acting

Mechanical life:	20 x 10 <sup>6</sup> operations
Electrical life:	2 x 10 <sup>5</sup> operations at 1000VA resistive load
Switching frequency:	max. 60/min at 100VA resistive load max. 6/min at 1000VA resistive load (in accordance with IEC 60947-5-1)
Overvoltage category:	III (in accordance with IEC 60664-1)
Rated surge voltage:	4kV

### 7. Measuring circuit

Measured variable:	AC Sinus, 48 to 63Hz
Input:	
3(N)~ 115/66V	terminals (N)-L1-L2-L3 (G2PF115VS02) (= supply voltage)
3(N)~ 230/132V	terminals (N)-L1-L2-L3 (G2PF230VS02) (= supply voltage)
3(N)~ 400/230V	terminals (N)-L1-L2-L3 (G2PF400VS02) (= supply voltage)
Overload capacity:	
3(N)~ 115/66V	3(N)~ 132/76V (G2PF115VS02)
3(N)~ 230/132V	3(N)~ 264/152V (G2PF230VS02)
3(N)~ 400/230V	3(N)~ 457/264V (G2PF400VS02)
Input resistance:	
3(N)~ 115/66V	5kΩ (G2PF115VS02)
3(N)~ 230/132V	10kΩ (G2PF230VS02)
3(N)~ 400/230V	15kΩ (G2PF400VS02)

Asymmetry:	fixed, typ. 30%
Overvoltage category:	III (according to IEC 60664-1)
Rated surge voltage:	4kV

### 8. Accuracy

Base accuracy:	≤3% (of maximum scale value)
Frequency response:	-
Adjustment accuracy:	-
Repetition accuracy:	≤2%
Voltage influence:	-
Temperature influence:	≤0.05% / °C


### 9. Ambient conditions

Ambient temperature:	-25 to +55°C (in accordance with IEC 60068-1) -25 to +40°C (in accordance with UL 508)
Storage temperature:	-25 to +70°C
Transport temperature:	-25 to +70°C
Relative humidity:	15% to 85% (in accordance with IEC 60721-3-3 class 3K3)
Pollution degree:	3 (in accordance with IEC 60664-1)
Vibration resistance:	10 to 55Hz 0.35mm (in accordance with IEC 60068-2-6)
Shock resistance:	15g 11ms (in accordance with IEC 60068-2-27)

## Functions


### Phase sequence monitoring

When all the phases are connected in the correct sequence and the measured asymmetry is less than the fixed value, the output relays switch into on-position (yellow LED illuminated). When the phase sequence changes, the output relays switch into off-position (yellow LED not illuminated).

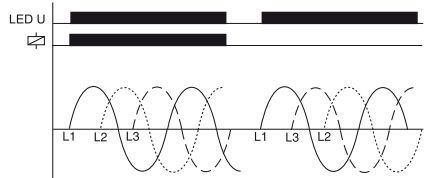


### Detection of reverse voltage (by means of evaluation of asymmetry)

The output relays switch into off-position (yellow LED not illuminated) when the asymmetry between the phase voltages exceeds the fixed value of the asymmetry. An asymmetry caused by the reverse voltage of a consumer (e.g. a motor which continues to run on two phases only) does not effect the disconnection.

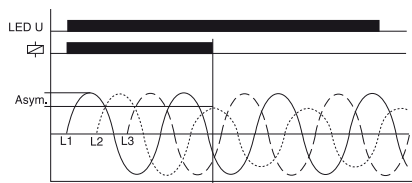


### Phase failure monitoring

When one of the three phases fails, the output relays switch into off-position (yellow LED not illuminated).

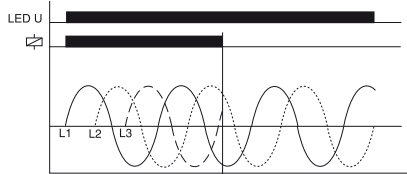

## Connections

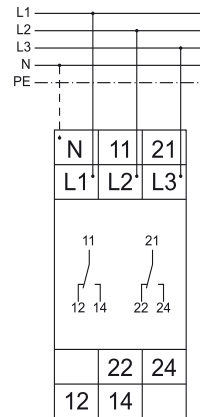

## Dimensions

