

Rating:
3 to 20A, 125-250VAC, 32VDC

Approvals:
UL, CUL, TUV, CE
UL1500/ISO8846 for ignition protection/marine

Dielectric Strength:
2500 VAC/ 1 minute

Interrupting capacity:
2500 amps

Resettable overload capacity:
10x rated current


Insulation Resistance:
100M ohms

Operating Temperature:
-10°C to 60°C

Voltage drop:
< 0.25 V

Applications:
Household Appliances
Transportation
Marine
Power Strips
Medical Equipment
Audio Visual Equipment
Power Supplies


Time Delay

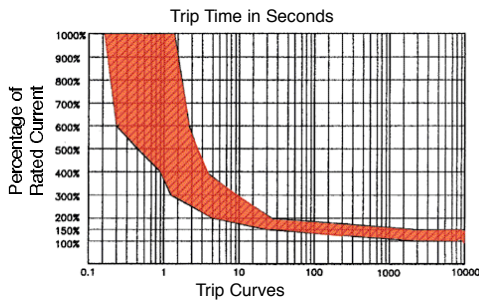

CMB SERIES ONLY	
OVERLOAD	TRIP TIME
100%	NO TRIP
150%	TRIP IN 1 HR
200%	4 - 40 SEC.
300%	1.2-12 SEC.
400%	0.5 - 5.5 SEC.
500%	0.4 - 3.5 SEC.
600%	0.3 - 2.5 SEC.

Breaker must hold 100% of rated current and must trip at 150% and above, within the time limits shown in curve. Trip times specified at 25° ambient with no preloading.
 1 To adjust the breaker rating for ambient temperature multiply the breaker rating by the factor. ex.) 5 amp rating at 0°C: 5 x .67 = 3.3 amp. Select 3 amp rating.

Dimensional Specifications

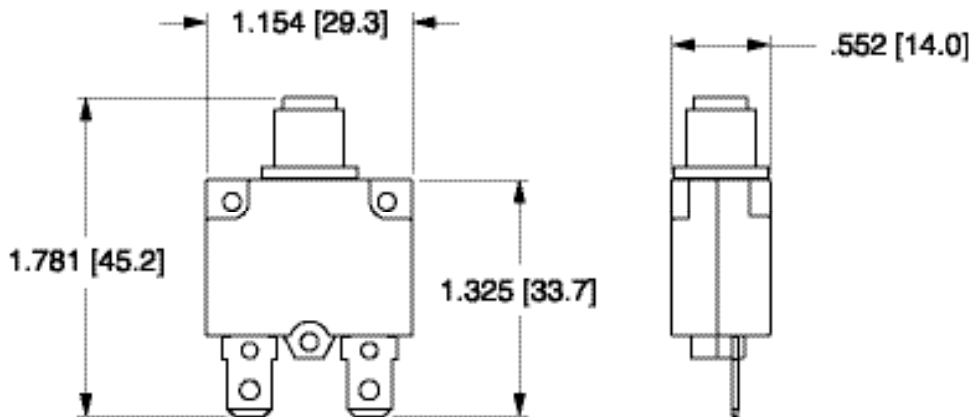

NOTES:
All dimensions are in.[mm].
Tolerance ±.005 [.127] unless otherwise specified.

