

Solid State Relays

Industrial, 1-Phase ZS, Standard Range

Types RA 24... 06/RA 44... 08/RA 48... 12



- AC Solid State Relay
- Zero switching
- Direct copper bonding technology
- Rated operational current: 10, 25, 50 and 90 AACrms
- Blocking voltage: Up to 1200 V_p
- Rated operational voltage: Up to 480 VACrms
- 3 input ranges: 3 to 32 VDC, 10 to 90 VAC/DC and 90 to 280 VAC/DC
- Isolation: OPTO (input-output) 4000 VACrms


Product Description

The zero switching relay with antiparallel thyristor output is the most widely used industrial SSR due to its multiple application possibilities. The relay can be used for resistive, inductive and capacitive loads. The zero switching relay switches ON when the sine curve just crosses zero and switches OFF when the current crosses zero.

ive, inductive and capacitive loads. The zero switching relay switches ON when the sine curve just crosses zero and switches OFF when the current crosses zero.

Ordering Key

RA 24 10 LA 06

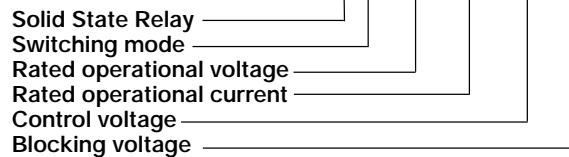

Type Selection

| Switching mode | Rated operational voltage | Rated operational current | Control voltage | Blocking voltage |
|-------------------|--|--|--|---|
| A: Zero switching | 24: 230 VACrms 44: 400 VACrms 48: 480 VACrms | 10: 10 AACrms 25: 25 AACrms 50: 50 AACrms 90: 90 AACrms | -D: 3 to 32 VDC LA: 10 to 90 VAC/DC HA: 90 to 280 VAC/DC | 06: 650 V _p 08: 850 V _p 12: 1200 V _p |

Selection Guide

| Rated operational voltage | Blocking voltage | Control voltage | Rated operational current | | | |
|---------------------------|---------------------|------------------|---------------------------|---------------|---------------|---------------|
| | | | 10 AACrms | 25 AACrms | 50 AACrms | 90 AACrms |
| 230 VACrms | 650 V _p | 3 to 32 VDC | RA 2410 -D 06 | RA 2425 -D 06 | RA 2450 -D 06 | RA 2490 -D 06 |
| | | 10 to 90 VAC/DC | RA 2410 LA 06 | RA 2425 LA 06 | RA 2450 LA 06 | RA 2490 LA 06 |
| | | 90 to 280 VAC/DC | RA 2410 HA 06 | RA 2425 HA 06 | RA 2450 HA 06 | RA 2490 HA 06 |
| 400 VACrms | 850 V _p | 3 to 32 VDC | RA 4410 -D 08 | RA 4425 -D 08 | RA 4450 -D 08 | RA 4490 -D 08 |
| | | 10 to 90 VAC/DC | RA 4410 LA 08 | RA 4425 LA 08 | RA 4450 LA 08 | RA 4490 LA 08 |
| | | 90 to 280 VAC/DC | RA 4410 HA 08 | RA 4425 HA 08 | RA 4450 HA 08 | RA 4490 HA 08 |
| 480 VACrms | 1200 V _p | 3 to 32 VDC | RA 4810 -D 12 | RA 4825 -D 12 | RA 4850 -D 12 | RA 4890 -D 12 |
| | | 10 to 90 VAC/DC | RA 4810 LA 12 | RA 4825 LA 12 | RA 4850 LA 12 | RA 4890 LA 12 |
| | | 90 to 280 VAC/DC | RA 4810 HA 12 | RA 4825 HA 12 | RA 4850 HA 12 | RA 4890 HA 12 |

General Specifications

| | RA 24... 06 | RA 44... 08 | RA 48... 12 |
|-----------------------------|-------------------------|-------------------------|-------------------------|
| Operational voltage range | 24 to 280 VACrms | 42 to 480 VACrms | 42 to 530 VACrms |
| Blocking voltage | $\geq 650 V_p$ | $\geq 850 V_p$ | $\geq 1200 V_p$ |
| Zero voltage turn-on | $\leq 20 V$ | $\leq 40 V$ | $\leq 40 V$ |
| Operational frequency range | 45 to 65 Hz | 45 to 65 Hz | 45 to 65 Hz |
| Power factor | $\geq 0.5 @ 230 VACrms$ | $\geq 0.5 @ 400 VACrms$ | $\geq 0.5 @ 480 VACrms$ |
| Approvals | UL, CSA | UL, CSA | UL, CSA |

Input Specifications

| | RA ... -D .. | RA ... LA .. | RA ... HA .. |
|------------------------|------------------|------------------|------------------|
| Control voltage range | 3 to 32 VDC | 10 to 90 VAC/DC | 90 to 280 VAC/DC |
| Pick-up voltage | $\leq 3 VDC$ | $\leq 10 VAC/DC$ | $\leq 90 VAC/DC$ |
| Drop-out voltage | $\geq 1 VDC$ | $\geq 1 VAC/DC$ | $\geq 10 VAC/DC$ |
| Reverse voltage | $\leq 32 VDC$ | | |
| Input impedance | 1.5 k Ω | 5.4 k Ω | 44 k Ω |
| Response time pick-up | $\leq 1/2$ cycle | ≤ 1 cycle | ≤ 1 cycle |
| Control pulse width | ≥ 0.5 ms | ≥ 0.5 ms | ≥ 0.5 ms |
| Response time drop-out | $\leq 1/2$ cycle | $\leq 1/2$ cycle | $\leq 1/2$ cycle |

Output Specifications

| | RA ..10 ... | RA ..25 ... | RA ..50 ... | RA ..90 ... |
|--|--------------------|--------------------|--------------------|---------------------|
| Rated operational current AC 51 AC 53a | 16 Arms 3 Arms | 25 Arms 5 Arms | 50 Arms 15 Arms | 90 Arms 20 Arms |
| Minimum operational current | 150 mArms | 150 mArms | 250 mArms | 400 mArms |
| Rep. overload current t=1 s | ≤ 35 Arms | ≤ 55 Arms | ≤ 125 Arms | ≤ 150 Arms |
| Non-rep. surge current t=10 ms | 160 A _p | 325 A _p | 600 A _p | 1150 A _p |
| Off-state leakage current @ rated voltage and frequency | ≤ 2.5 mArms | ≤ 3 mArms | ≤ 3 mArms | ≤ 3 mArms |
| I ² t for fusing t=10 ms | $\leq 130 A^2s$ | $\leq 525 A^2s$ | $\leq 1800 A^2s$ | $\leq 6600 A^2s$ |
| On-state voltage drop @ rated current | $\leq 1.6 Vrms$ | $\leq 1.6 Vrms$ | $\leq 1.6 Vrms$ | $\leq 1.6 Vrms$ |
| Critical dV/dt commutating | $\geq 500 V/\mu s$ | $\geq 500 V/\mu s$ | $\geq 500 V/\mu s$ | $\geq 500 V/\mu s$ |
| Critical dV/dt off-state | $\geq 500 V/\mu s$ | $\geq 500 V/\mu s$ | $\geq 500 V/\mu s$ | $\geq 500 V/\mu s$ |

Thermal Specifications

| | RA ..10 ... | RA ..25 ... | RA ..50 ... | RA ..90 ... |
|-------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Operating temperature | -20° to +70°C (-4° to +158°F) | -20° to +70°C (-4° to +158°F) | -20° to +70°C (-4° to +158°F) | -20° to +70°C (-4° to +158°F) |
| Storage temperature | -40° to +100°C (-40° to +212°F) | -40° to +100°C (-40° to +212°F) | -40° to +100°C (-40° to +212°F) | -40° to +100°C (-40° to +212°F) |
| Junction temperature | $\leq 125^\circ C (\leq 257^\circ F)$ | $\leq 125^\circ C (\leq 257^\circ F)$ | $\leq 125^\circ C (\leq 257^\circ F)$ | $\leq 125^\circ C (\leq 257^\circ F)$ |
| R _{th} junction to case | $\leq 2.0 K/W$ | $\leq 1.25 K/W$ | $\leq 0.65 K/W$ | $\leq 0.3 K/W$ |
| R _{th} junction to ambient | $\leq 12.5 K/W$ | $\leq 12 K/W$ | $\leq 12 K/W$ | $\leq 12 K/W$ |



Isolation


| | |
|--|----------------------|
| Rated isolation voltage Input to output | ≥ 4000 VACrms |
| Rated isolation voltage Output to case | ≥ 4000 VACrms |
| Insulation resistance Input to output | ≥ 10 ¹⁰ Ω |
| Insulation resistance Output to case | ≥ 10 ¹⁰ Ω |
| Insulation capacitance Input to output | ≤ 8 pF |
| Insulation capacitance Output to case | ≤ 100 pF |

Accessories


Protection cover
Heatsinks
DIN rail adapter
Varistors
Fuses

For further information refer to "General Accessories".


Wiring Diagram

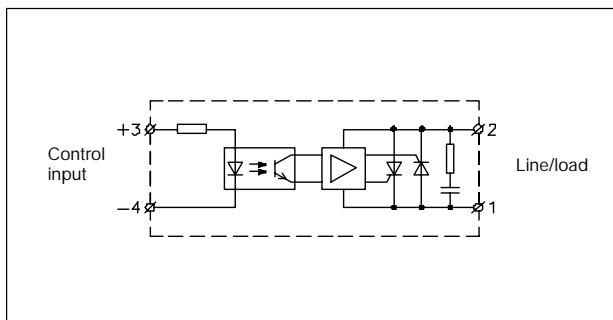

Functional Diagram

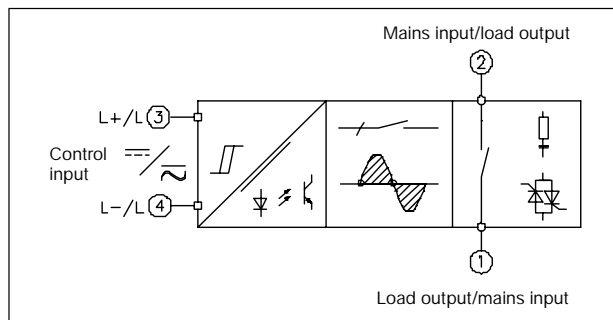

Dimensions

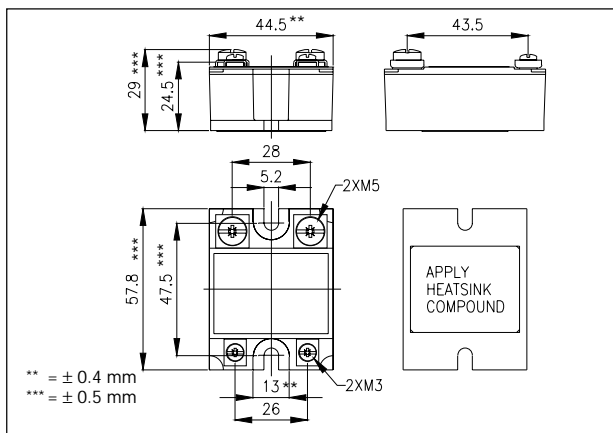

All dimensions in mm

Housing Specifications

| | |
|------------------|----------------------|
| Weight | Approx. 110 g |
| Housing material | Noryl GFN 1, black |
| Base plate | 10, 25, 50 A 90 A |
| Potting compound | Polyurethane |
| Relay | |
| Mounting screws | M5 |
| Mounting torque | ≤ 1.5 Nm |
| Control terminal | |
| Mounting screws | M3 x 6 |
| Mounting torque | ≤ 0.5 Nm |
| Power terminal | |
| Mounting screws | M5 x 6 |
| Mounting torque | ≤ 2.4 Nm |



Heatsink Dimensions (load current versus ambient temperature)

RA ..10 ...

| Load current [A] | Thermal resistance [K/W] | | | | | | Power dissipation [W] |
|------------------|--------------------------|------|------|------|------|------|-----------------------|
| | 20 | 30 | 40 | 50 | 60 | 70 | |
| 16 | 2.7 | 2.2 | 1.8 | 1.3 | 0.87 | 0.41 | 22 |
| 15 | 3.1 | 2.6 | 2.1 | 1.7 | 1.2 | 0.65 | 20 |
| 14 | 3.7 | 3.1 | 2.6 | 2 | 1.5 | 0.92 | 18 |
| 13 | 4.3 | 3.7 | 3.1 | 2.5 | 1.9 | 1.2 | 16 |
| 12 | 5 | 4.3 | 3.7 | 3 | 2.3 | 1.6 | 15 |
| 11 | 5.9 | 5.1 | 4.4 | 3.6 | 2.8 | 2.1 | 13 |
| 10 | 6.9 | 6 | 5.2 | 4.3 | 3.5 | 2.6 | 12 |
| 9 | 7.9 | 6.9 | 5.9 | 4.9 | 4 | 3 | 10 |
| 7 | 10.8 | 9.5 | 8.1 | 6.8 | 5.4 | 4.1 | 7 |
| 5 | - | 14.2 | 12.2 | 10.2 | 8.1 | 6.1 | 5 |
| 3 | - | - | - | - | 14.6 | 10.9 | 3 |
| 1 | - | - | - | - | - | - | 1 |

T_A
Ambient temp. [°C]

RA ..25 ...

| Load current [A] | Thermal resistance [K/W] | | | | | | Power dissipation [W] |
|------------------|--------------------------|------|------|------|------|------|-----------------------|
| | 20 | 30 | 40 | 50 | 60 | 70 | |
| 25 | 2 | 1.7 | 1.4 | 1 | 0.71 | 0.40 | 32 |
| 22.5 | 2.5 | 2.1 | 1.8 | 1.4 | 1 | 0.66 | 27 |
| 20 | 3.1 | 2.7 | 2.3 | 1.9 | 1.4 | 1 | 23 |
| 17.5 | 4 | 3.5 | 3 | 2.5 | 2 | 1.4 | 20 |
| 15 | 4.9 | 4.3 | 3.7 | 3.1 | 2.5 | 1.9 | 16 |
| 12.5 | 6.2 | 5.4 | 4.6 | 3.9 | 3.1 | 2.3 | 13 |
| 10 | 8.1 | 7.1 | 6.1 | 5.1 | 4 | 3 | 10 |
| 7.5 | 11.3 | 9.9 | 8.5 | 7.1 | 5.6 | 4.2 | 7 |
| 5 | - | 15.6 | 13.3 | 11.1 | 8.9 | 6.7 | 5 |
| 2.5 | - | - | - | - | 18.7 | 14 | 2 |

T_A
Ambient temp. [°C]

RA ..50 ...

| Load current [A] | Thermal resistance [K/W] | | | | | | Power dissipation [W] |
|------------------|--------------------------|------|------|------|------|------|-----------------------|
| | 20 | 30 | 40 | 50 | 60 | 70 | |
| 50 | 0.92 | 0.76 | 0.60 | 0.45 | 0.29 | - | 63 |
| 45 | 1.2 | 0.99 | 0.80 | 0.62 | 0.44 | 0.26 | 55 |
| 40 | 1.5 | 1.3 | 1.1 | 0.85 | 0.63 | 0.42 | 47 |
| 35 | 1.9 | 1.6 | 1.4 | 1.1 | 0.89 | 0.63 | 40 |
| 30 | 2.4 | 2.1 | 1.8 | 1.5 | 1.2 | 0.91 | 33 |
| 25 | 3 | 2.7 | 2.3 | 1.9 | 1.5 | 1.1 | 26 |
| 20 | 3.9 | 3.5 | 3 | 2.5 | 2 | 1.5 | 20 |
| 15 | 5.5 | 4.8 | 4.1 | 3.4 | 2.7 | 2.1 | 15 |
| 10 | 8.6 | 7.5 | 6.4 | 5.4 | 4.3 | 3.2 | 9 |
| 5 | 17.9 | 15.6 | 13.4 | 11.2 | 8.9 | 6.7 | 4 |

T_A
Ambient temp. [°C]

RA ..90 ...

| Load current [A] | Thermal resistance [K/W] | | | | | | Power dissipation [W] |
|------------------|--------------------------|------|------|------|------|------|-----------------------|
| | 20 | 30 | 40 | 50 | 60 | 70 | |
| 90 | 0.63 | 0.53 | 0.42 | 0.32 | - | - | 97 |
| 80 | 0.81 | 0.69 | 0.57 | 0.45 | 0.33 | - | 84 |
| 70 | 1 | 0.89 | 0.75 | 0.61 | 0.47 | 0.33 | 71 |
| 60 | 1.3 | 1.2 | 1 | 0.83 | 0.66 | 0.49 | 59 |
| 50 | 1.7 | 1.5 | 1.3 | 1.1 | 0.85 | 0.64 | 47 |
| 40 | 2.2 | 1.9 | 1.7 | 1.4 | 1.1 | 0.83 | 36 |
| 30 | 3.1 | 2.7 | 2.3 | 1.9 | 1.5 | 1.2 | 26 |
| 20 | 4.8 | 4.2 | 3.6 | 3 | 2.4 | 1.8 | 17 |
| 10 | 10 | 8.8 | 7.5 | 6.3 | 5 | 3.8 | 8 |

T_A
Ambient temp. [°C]

Heatsink Selection

| Carlo Gavazzi Heatsink (see Accessories) | Thermal resistance |
|--|--------------------------|
| No heatsink required | $R_{th\ s-a} > 12.5$ K/W |
| RHS 100 Assy | 3.0 K/W |
| RHS 301 Assy | 0.8 K/W |
| RHS 301 F Assy | 0.25 K/W |
| Consult your distributor | < 0.25 K/W |

Compare the value found in the current versus temperature chart with the standard heatsink values and select the heatsink with the next lower value.



Applications


This relay is designed for use in applications in which it is exposed to high surge conditions. Care must be taken to ensure proper heatsinking when the relay is to be used at high sustained currents. Adequate electrical connection between relay terminals and cable must be ensured.

Thermal characteristics

The thermal design of Solid State Relays is very impor-

tant. It is essential that the user makes sure that cooling is adequate and that the maximum junction temperature of the relay is not exceeded.

If the heatsink is placed in a small closed room, control panel or the like, the power dissipation can cause the ambient temperature to rise. The heatsink is to be calculated on the basis of the ambient temperature and the increase in temperature.

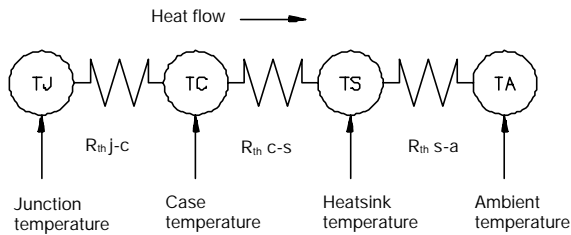

Thermal resistance:
R_{th j-c} = junction to case

R_{th c-s} = case to heatsink
R_{th s-a} = heatsink to ambient

Direct bonding

In the design of the output power semiconductor direct bonding of the copper layer and the ceramic substrate has been applied. This is to ensure uninhibited heat transfer and high thermal fatigue strength.

The relay has been designed for applications requiring large numbers of load cycles.

Power dissipation

The power dissipation for intermittent use is calculated according to the following formula:

$$I_{rms} = \sqrt{\frac{I_{ON}^2 \times t_{ON}}{t_{ON} + t_{OFF}}}$$

Ex: RA 24 50 -D 06:
Load current = 45 A
t_{ON} = 30 s
t_{OFF} = 15 s

$$I_{rms} = \sqrt{\frac{45^2 \times 30}{30 + 15}}$$

The rms current will be 36.7 A.

