

Description

One, two and three pole thermal-magnetic circuit breakers with trip-free mechanism and toggle actuation (S-type TM CBE to EN 60934/IEC 934). Designed for panel or plug-in mounting. Available with auxiliary contacts (1 x N/O, 1 x N/C) for status signalling. Two and three pole models are internally linked to ensure that both/all poles trip in the event of an overload on one pole, even if the actuator is held in the ON position. A choice of characteristic curves further extends the range of applications possibilities for these CBEs. Special auxiliary contact versions for industrial atmosphere and low voltages (e.g. 5 V) available on request.

Approved to CBE standard EN 60934 (IEC 60934). Suitable for use in distribution rails – see section 7.

Typical applications

Process control equipment, robotics, machine tool control, communications systems, instrumentation, rail vehicles. Special versions, e.g. for aggressive environmental conditions and low voltages (e.g. 5 V) on request.

Ordering information

Type No.

2210 single or multipole thermal-magnetic circuit breaker

Mounting

S socket or panel mounting

Actuator design

2 toggle

Number of poles

1 1-pole protected

2 2-pole protected

3 3-pole protected

5 2-pole, protected on one pole only

Panel mounting

0 without hardware

1 with M3 thread

2 with 6/32 thread

Terminal design (main contacts)

P1 blade terminals 6.3-0.8 (QC .250)

Characteristic curve

F1 fast acting: therm. 1.01-1.4x I_N ; magn. 2-4x I_N DC (DC only)

F2 fast acting: therm. 1.01-1.4x I_N ; magn. 3.5-6.5x I_N AC/ 4.5-8.5x I_N DC

M1 standard delay: therm. 1.01-1.4x I_N ; magn. 6-12x I_N AC; 7.8-15.6x I_N DC

T1 delayed: therm. 1.01-1.4x I_N ; magn. 10-20x I_N AC

T2 thermal only, 1.01-1.4x I_N

M3 standard delay, low resistance: therm. 1.4-1.8x I_N ; magn. 6-12x I_N AC; 7.8-15.6x I_N DC

Intermediate position

H without intermediate position (standard)

Z with intermediate position

Auxiliary contacts

0 without auxiliary contacts

1 with auxiliary contacts in all poles

2 with auxiliary contacts in pole 1 (only multipole devices)

3 with auxiliary contacts in poles 1 and 3 (\geq 3-pole devices)

Auxiliary contact function (see diagram)

1 one each N/C and N/O (standard)

2 one N/O contact (23/24)

3 one N/C contact (11/12)

Auxiliary contact - terminal design

1 same as main terminals

Current ratings

0.1...25 A

2210 - S 2 1 0 - P1 F1 - H 1 1 1 - 10 A ordering example

Remote trip coil available to special order.



2210-S2..

2

Technical data


For further details please see chapter: Technical Information

Voltage rating	AC 250 V*; 3 AC 433 V (50-60Hz); DC 65 V (*UL: AC 277 V; DC 65 V)						
Current rating range	0.1...25 A for curves M1, T1, T2 0.1...16 A for curves F1, F2, M3						
Auxiliary circuit	1 A, AC 240 V/DC 65 V						
Typical life	10,000 operations at 1 x I_N , inductive						
Ambient temperature	-30...+60 °C (-22...+140 °F) T 60						
Insulation co-ordination (IEC 60664 and 60664A)	rated impulse withstand voltage pollution degree 2.5 kV reinforced insulation in operating area						
Dielectric strength (IEC 60664 and 60664A)	test voltage operating area main/aux. circuit aux. circuit 11-12/23-24 pole/pole						
	AC 3,000 V AC 1,500 V AC 1,000 V AC 1,500 V						
Insulation resistance	> 100 MΩ (DC 500 V)						
Interrupting capacity I_{cn}	0.1...5 A 400 A; 6...25 A 800 A curve T2 : 0.1...25 A 15 x I_N curve M3: 0.1...2 A AC 200 A / DC 400 A						
Interrupting capacity (UL 1077)	I_N U_N	0.1...8 A AC 250 V	10...16 A AC 125 V	20...25 A AC 250 V 0.1...25 A DC 65 V			
	1-pole	1,000 A	2,000 A	3,500 A 2,000 A			
	2-pole	2,000 A	2,000 A	3,500 A 2,000 A			
	3-pole	3AC 250V 2,000 A	3AC 250V 2,000 A	3AC 216V 3,500 A			
Degree of protection (IEC 60529/DIN 40050)	operating area IP30 terminal area IP00						
Vibration	curve F1: curves M1, M3, T1, T2:	3 g (57-500 Hz), ± 0.23 mm (10-57 Hz) 5 g (57-500 Hz), ± 0.38 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis					
Shock	curve F1: curves M1, M3, T1, T2:	25 g (11 ms), directions 1, 2, 3, 4, 5 10 g (11 ms), direction 6 25 g (11 ms), directions 1, 2, 3, 4, 5 20 g (11 ms), direction 6 to IEC 60068-2-27, test Ea					
Corrosion	96 hours in 5 % salt mist to IEC 60068-2-11, test Ka						
Humidity	240 hours at 95 % RH to IEC 60068-2-78, test Cab						
Mass	approx. 50 g per pole						

Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)					
	F1 fast acting for DC only	F2 fast acting delay for AC + DC	M1 standard for AC + DC	T1 delayed low resistance nur für AC	M3 standard delay for AC + DC	T2 thermal for AC + DC
0.1	162	162	92	81	42	77
0.2	39.3	39.3	26.1	24.2	11.7	23
0.3	17.5	17.5	11.6	10.4	5.6	10.2
0.4	9.2	9.2	6.6	6.0	2.9	5.7
0.5	6.8	6.8	4.1	3.9	1.75	3.7
0.6	4.2	4.2	3	2.7	1.42	2.6
0.8	2.8	2.8	1.65	1.53	0.75	1.39
1	1.6	1.6	1.10	0.98	0.5	0.9
1.5	0.78	0.78	0.47	0.42	0.22	0.36
2	0.42	0.42	0.28	0.24	0.136	0.19
2.5	0.26	0.26	0.183	0.17	0.083	0.141
3	0.18	0.18	0.124	0.12	0.057	0.091
4	0.12	0.12	0.077	0.073	0.041	0.051
5	0.092	0.092	0.063	0.055	0.032	0.040
6	0.054	0.054	0.045	0.039	0.021	0.027
8	0.025	0.025	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
10	0.022	0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
12	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
16	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
20	-	-	≤ 0.02	≤ 0.02	-	≤ 0.02
25	-	-	≤ 0.02	≤ 0.02	-	≤ 0.02


Dimensions

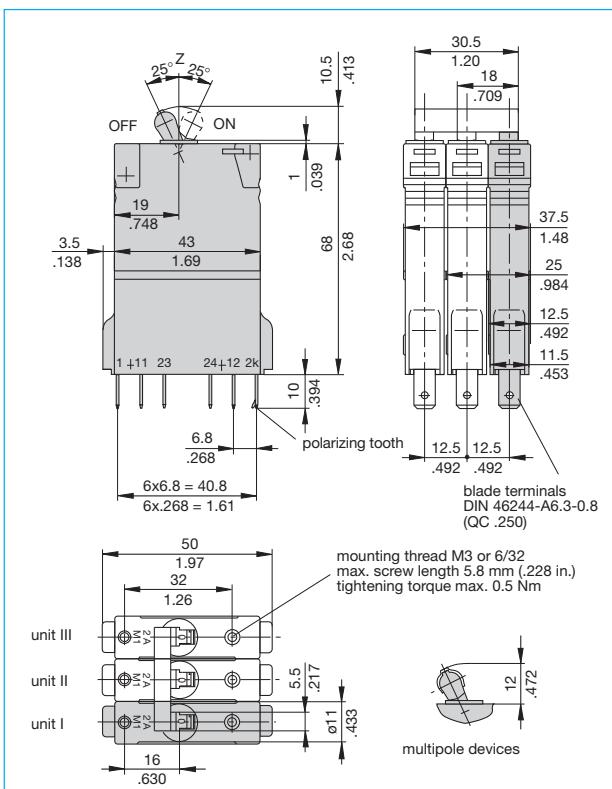


Approvals

Authority	Voltage ratings	Current ratings
GL, VDE (EN 60934)	AC 250 V; DC 65 V; 3 AC 433 V	0.1...25 A
UL, CSA	AC 277 V; DC 65 V; AC 277/480 V	0.1...25 A


Toggle positions

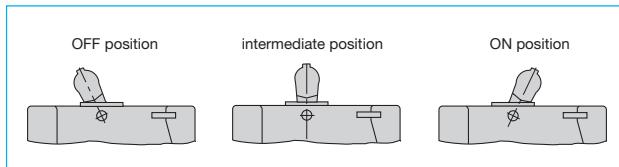


Shock directions

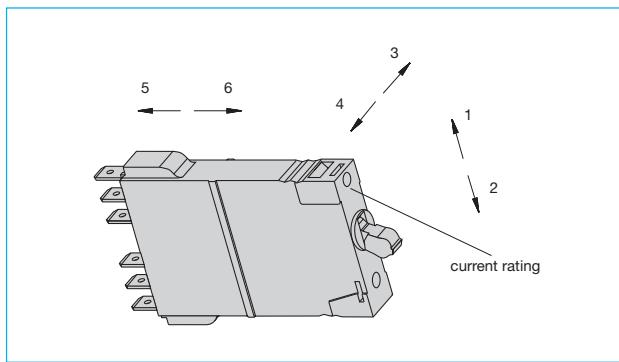

Cut-out dimensions

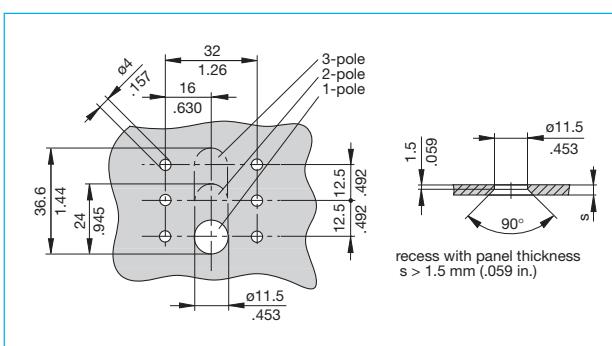


Installation drawing

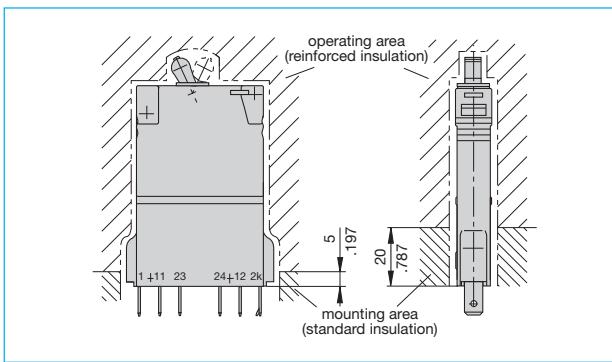

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)


Internal connection diagrams

with auxiliary contact function 1 (one each N/O and N/C)
 (...-H111-...) without intermediate position
 (...-Z111-...) with intermediate position

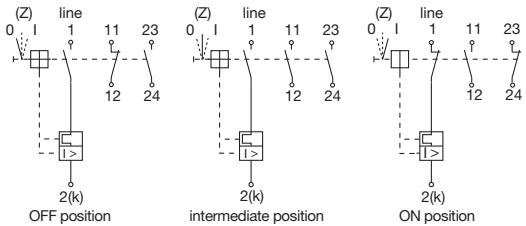


Typical time/current characteristics


-F1 0.1 ... 16 A DC only

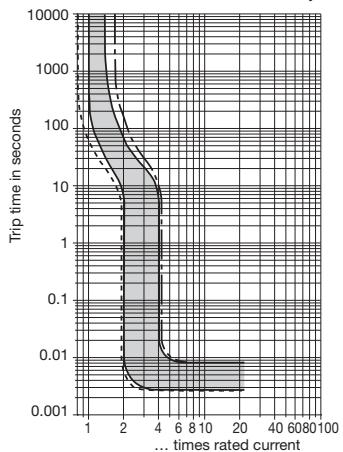

-F2 0.1 ... 7.5 A AC / DC¹⁾

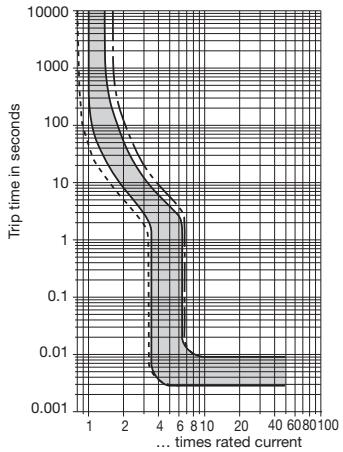

-F2 8 ...16 A AC / DC¹⁾

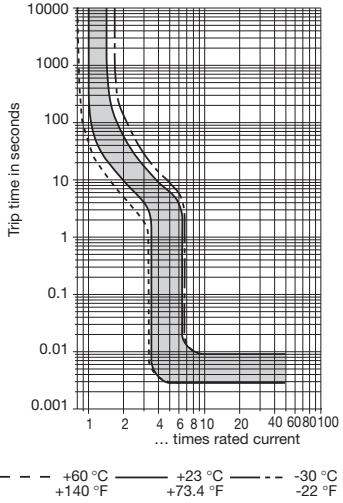

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.

Ambient temperature °F	-22	-4	+14	+32	+73.4	+86	+104	+122	+140
°C	-30	-20	-10	0	+23	+30	+40	+50	+60

Derating factor 0.76 0.79 0.83 0.88 1 1.04 1.11 1.19 1.29

Multipole devices: all poles symmetrically loaded. With single pole overload, thermal tripping will be at max. $1.7 \times I_N$ with curves F1, F2, M1 and T2, and at max. $2.2 \times I_N$ with curve M3.

¹⁾ Magnetic tripping currents are increased by 30% on DC supplies.

Typical time/current characteristics

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.


Ambient temperature °F	-22	-4	+14	+32	+73.4	+86	+104	+122	+140
°C	-30	-20	-10	0	+23	+30	+40	+50	+60

Derating factor 0.76 0.79 0.83 0.88 1 1.04 1.11 1.19 1.29

Multi pole devices: all poles symmetrically loaded. With single pole overload, thermal tripping will be at max. $1.7 \times I_N$ with curves F1, F2, M1 and T2, and at max. $2.2 \times I_N$ with curve M3.


¹⁾ Magnetic tripping currents are increased by 30% on DC supplies (curves M1, M3, T1).

2

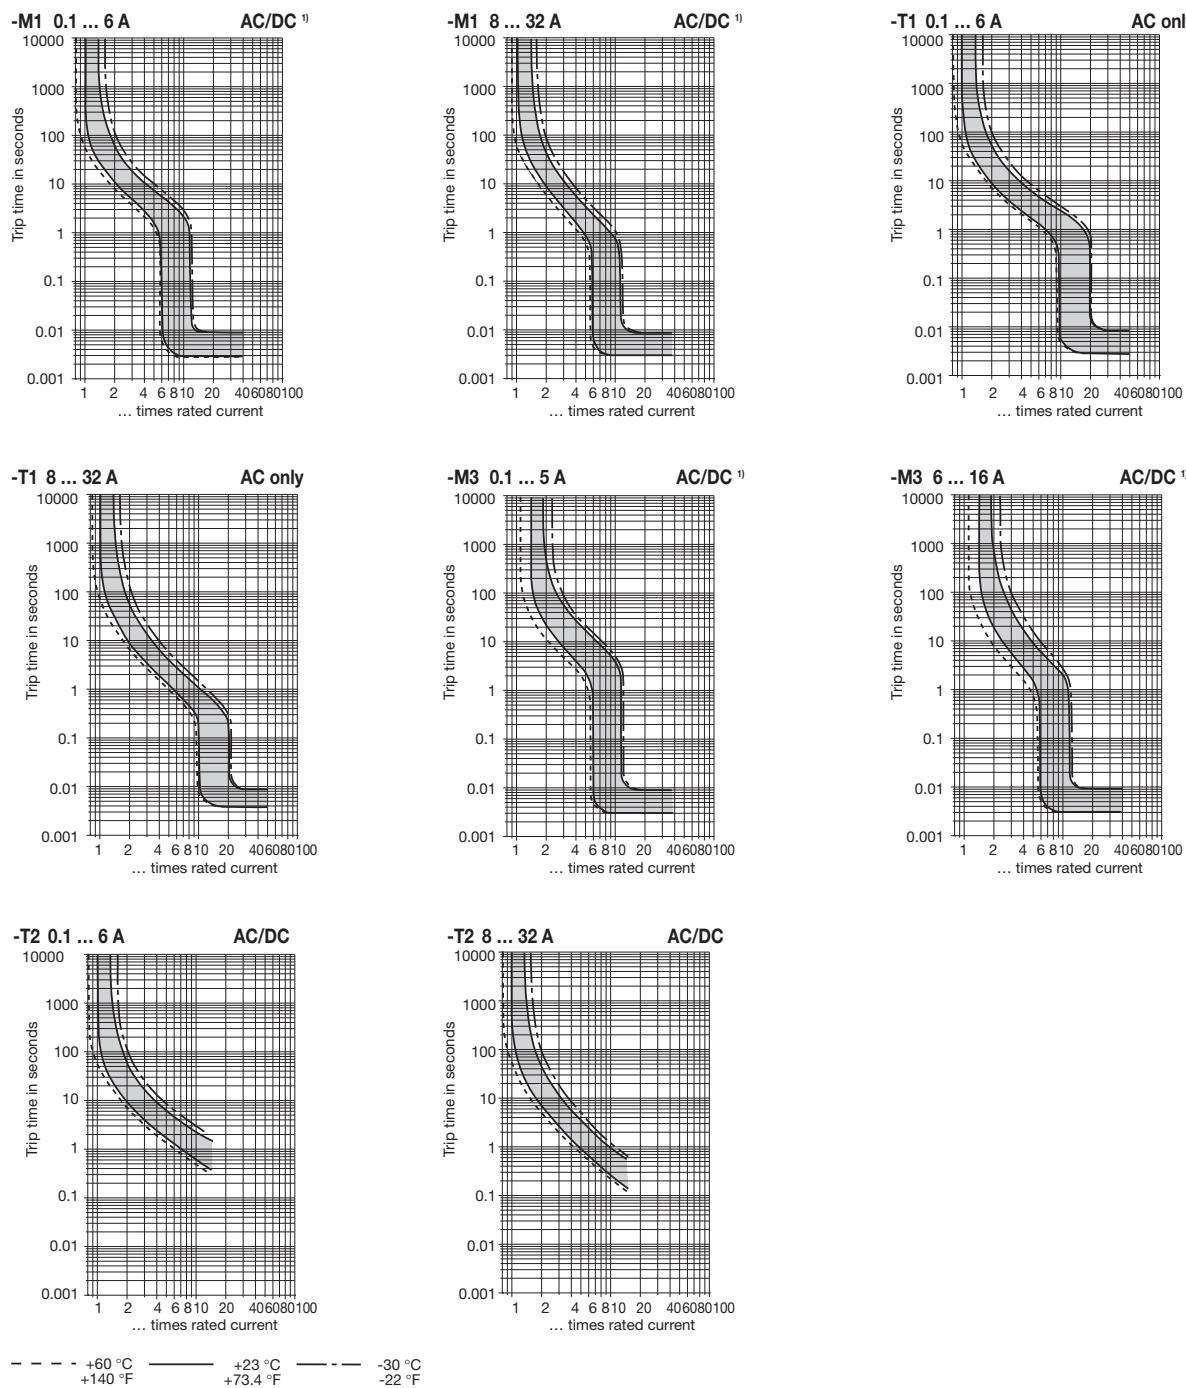


Accessories


Module 17plus
For technical data see section 7 - Power distribution systems

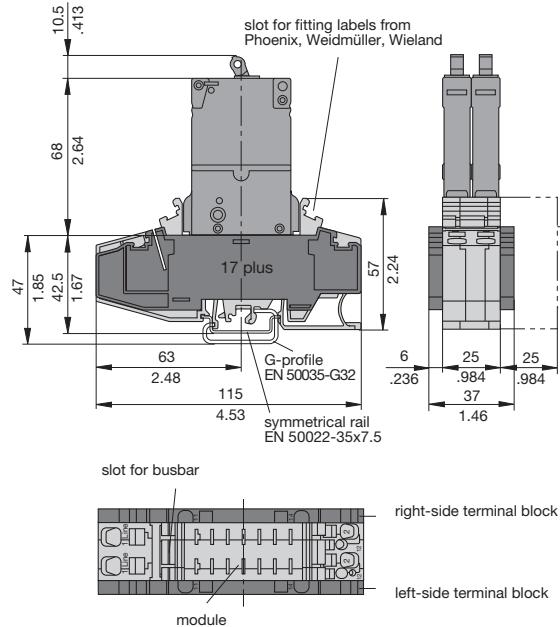

2-way mounting socket
6-way mounting socket
23-P10-Si **63-P10-Si**
(up to 16 A max. load)
(retaining clip Y 302 974 01 available on request)

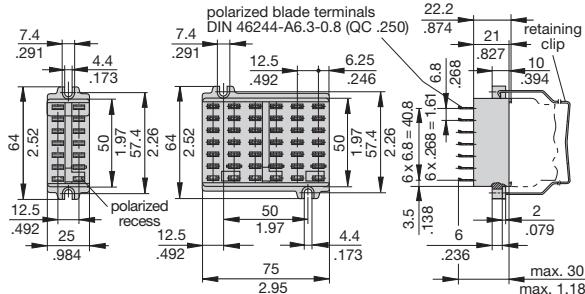


Bus bar 50 A, 6-way, for type 63-P10-Si socket
X 221 760 11

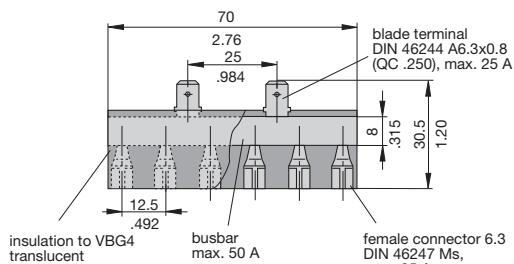


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)


Single mounting sockets
(up to 16 A max. load)
17-P10-Si
17-P70-Si
(retaining clip Y 302 974 21 available on request)

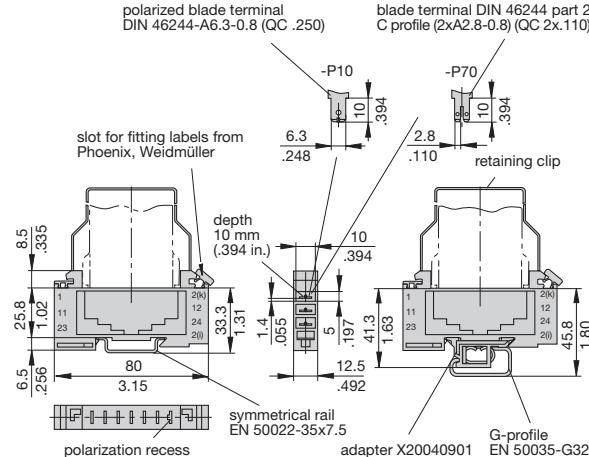


Bus bar 50 A (6-way) for type 17-P10-Si socket
X 221 760 01

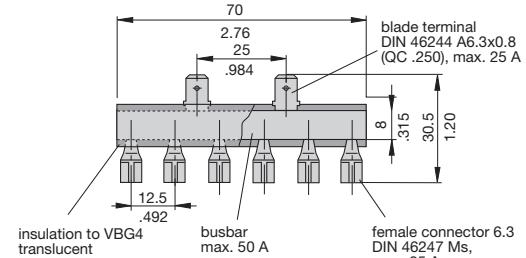

Bus bar (10-way) (supplied as a complete package)
for type 17 socket
(for max. 100 A continuous load),
more positions available on request
X 211 157 01 with terminal
X 211 157 02 without terminal

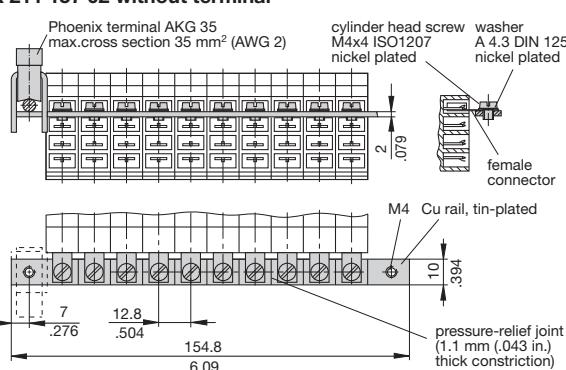


Insulating sleeving for bus bar (10-way)
Y 303 824 01




Accessories

Connector bus links -P10

- X 210 588 01/ 1.5 mm², (AWG 16), brown (up to 13 A max. load)
- X 210 588 02/ 2.5 mm², (AWG 14), black (up to 20 A max. load)
- X 210 588 03/ 2.5 mm², (AWG 14), red (up to 20 A max. load)
- X 210 588 04/ 2.5 mm², (AWG 14), blue (up to 20 A max. load)




Toggle guard for 1-pole units, black
X 221 617 01

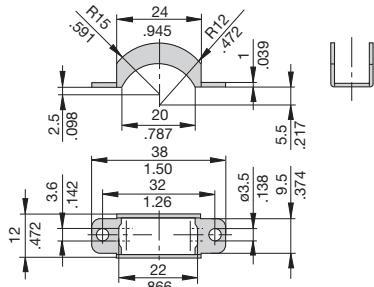

For front panel mounting.


Splash cover (transparent)

Spacier 30x30 (transparent)
with fixing plate and screws (IP54)
for type 2210-S211... (1-pole)
X 211 117 02

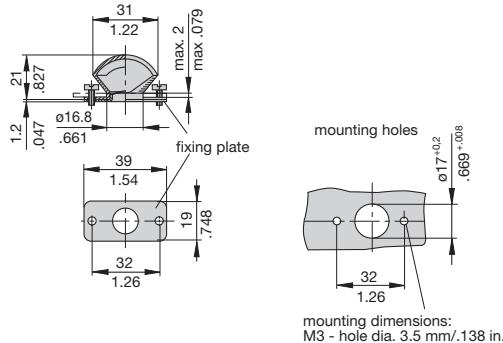

Splash cover (transparent)

with fixing plate and screws (IP54)
for type 2210-S221-... (2-pole) and
type 2210-S231-... (3-pole)
X 211 118 01

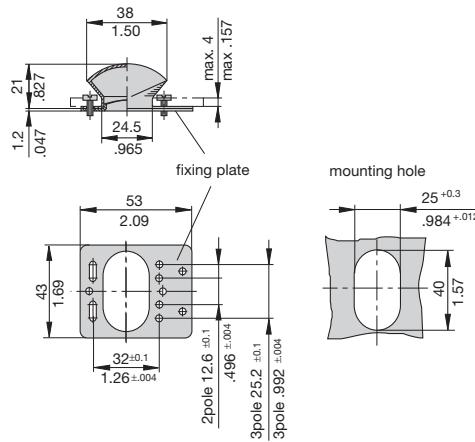

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.