FEMALE PC QUICK-FIT TERMINALS

ACCEPTS .110 (2.8) TAB — HORIZONTAL ENTRY

.062 [1.55] .280 [7.1] .156 [4.0] .075 [1.90] .212 [5.4] .040 [1.00] .400 [10.2] .100 [2.5] .070 [1.80]

MATERIAL: .012 (.30) thick Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3545	.110 (2.8) × .020 (.50)
3549	.110 (2.8) × .032 (.80)

Mounting Detail: .400 [10.1], .076 [1.9] DIA., .046 [1.15] DIA.

ACCEPTS .205 (5.2) TAB — HORIZONTAL ENTRY

.062 [1.55] .250 [6.4] .240 [6.1] .098 [2.5] .212 [5.4] .062 [1.55] .400 [10.2] .180 [4.6] .100 [2.5]

MATERIAL: .012 (.30) thick Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3546	.205 (5.2) × .020 (.50)
3550	.205 (5.2) × .032 (.80)

Mounting Detail: .400 [10.1], .104 [2.6] DIA., .067 [1.70] DIA.

ACCEPTS .250 (6.4) TAB — HORIZONTAL ENTRY

.062 [1.55] .250 [6.4] .291 [7.4] .098 [2.5] .212 [5.4] .062 [1.55] .400 [10.2] .205 [5.2] .100 [2.5]
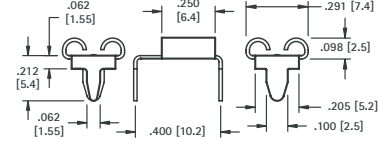
MATERIAL: .016 (.41) thick Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3547	.250 (6.4) × .032 (.80)

Mounting Detail: .400 [10.1], .104 [2.6] DIA., .067 [1.70] DIA.

ACCEPTS .110 (2.8) TAB — VERTICAL ENTRY

.156 [4.0] .200 [5.1] .196 [5.0] .440 [11.2] .125 [3.2] .144 [3.7] .062 [1.55] .086 [2.2] .070 [1.80]

MATERIAL: .012 (.30) thick Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3534	.110 (2.8) × .020 (.50)
3544	.110 (2.8) × .032 (.80)

Mounting Detail: .144 [3.7], .065 [1.65] DIA. (2) PLS

ACCEPTS .205 (5.2) TAB — VERTICAL ENTRY

.271 [6.9] .250 [6.3] .281 [7.1] .437 [11.1] .070 [1.80] .076 [1.90] .120 [3.0] .125 [3.2]

MATERIAL: Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB	MAT'L THICK
3525	.205 (5.2) × .020 (.50)	.012 (.30)
3522	.205 (5.2) × .025 (.60)	.016 (.40)
	.205 (5.2) × .032 (.80)	.016 (.40)

Mounting Detail: .200 [5.1], .100 [2.5] DIA. (2) PLS

ACCEPTS .250 (6.4) TAB — VERTICAL ENTRY

.291 [7.4] .250 [6.3] .281 [7.1] .437 [11.1] .050 [1.25] .110 [2.8] .091 [2.3] .125 [3.2]

MATERIAL: .016 (.41) thick Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3528	.250 (6.4) × .032 (.80)

Mounting Detail: .200 [5.1], .100 [2.5] DIA. (2) PLS

ACCEPTS .187 (4.8) TAB — VERTICAL ENTRY

.232 [5.9] .146 [3.7] .420 [10.7] .150 [3.8] .050 [1.25] .102 [2.6] .200 [5.1]

MATERIAL: .016 (.41) thick Brass, Tin Nickel Plate

CAT. NO.	ACCEPTS TAB
3548	.187 (4.8) × .020 (.50)
3551	.187 (4.8) × .032 (.80)

Mounting Detail: .200 [5.1], .052 [1.30] DIA. (2) PLS

ACCEPTS ALL TABS — VERTICAL OR HORIZONTAL ENTRY

.150 [3.8] .185 [4.7] .400 [10.2] .150 [3.8] .134 [3.4] .062 [1.57] .027 [0.69] .130 [3.3]

MATERIAL: .016 (.41) thick Brass, Tin Nickel Plate

| CAT. NO.	ACCEPTS TAB
3557	.110 (2.8) to .250 (6.4) × .020 (.50) to .032 (.80)

UNIVERSAL QUICK-FIT TERMINAL

Accepts all tabs with vertical or horizontal entry

Mounting Detail: .134 [3.4], .067 [1.70] DIA. (2) PLS

MULTI-PURPOSE HAND TOOL

• This Multi-purpose tool is all that is required to crimp wires into solderless terminals. Refer to pages 48 and 49.

- Confined trapezoid-type crimping dies for insulated terminals
- Indentor-type crimping die for non-insulated terminals
- Machined nut and bolt for precise pivoting – and it's adjustable
- Anvil-type wire cutter is precision ground
- Slots for looping solid wire
- Crimping die for non-insulated terminals
- Threaded bolt cutter for five common sizes
- Precision ground scissors action wire cutter
- Wire Stripper is also handy wire gauge (22 thru 8 AWG)
- "F" type crimping die 7-8 mm for automotive terminals

CAT. NO. 1345