



FLOW



TEMPERATURE



HUMIDITY

Flow Sens FS1

Thermal Mass Flow Sensor for all-purpose use in Gases

Product

The Flow sensor element consists of two temperature depending platinum-resistors, both deposited on one chip. The low-ohm resistor with a small area is used as a heater, whereas the other high-ohm resistor serves to measure the reference temperature. Using a bridge circuit, the differing resistance value of two elements leads to different (self) heating. The (self) heating is dependent upon the applied voltage, the mass flow, and the media in which the sensor is located. Higher voltage increases self heating, a higher flow rate increases cooling. If the self heating is kept constantly by a suitable controller, the voltage increases with higher flow rates and therefore becomes a measure for the mass flow. As a result of his little thermal mass, this sensor has fast heating and cooling response times. The measuring principle of the sensor can be used for large operation ranges, from 0...0.1m/s up to 100m/s. The Flow Sens is also available with a plastic housing of \varnothing 6mm. This option provides the user with ideal opportunities to incorporate the element into custom-built applications or specific housings, e.g. into a T-piece.

Advantages

- Easy adaptable for different applications or into housings
- Simple signal processing and calibration
- No mechanical moved components
- Excellent reproducibility
- Excellent long-term stability
- Best price-performance ratio

Applications

- HVAC and building control solutions
- Automotive industry
- Medical devices
- Device monitoring
- Cooling devices
- Food industry



INNOVATIVE SENSOR TECHNOLOGY

ISTAG, Industriestrasse 2, CH-9630 Wattwil, Switzerland, Phone (+)41 71 987 73 73, Fax (+)41 71 987 73 77
e-mail info@ist-ag.com, www.ist-ag.com



Flow Sens FS1


Thermal Mass Flow Sensor for all-purpose use in Gases

Technical Data

Measuring principle	thermal
Measuring range	0 ... 100 m/s
Response sensitivity	0.01 m/s
Accuracy	< 3% current measuring value (dependent on electronic and calibration)
Response time $t_{63\%}$	Ca. < 2 s
Temperature range	-20 ... + 150 °C
Temperature sensitivity	< 0.1 %/K (dependent on electronic)
Electrical connection	3 pins, Leads AWG30, insulated with PTFE, or custom specific
Heater	$R_H(0^\circ\text{C}) = 45 \Omega \pm 1\%$
Referenz element	$R_S(0^\circ\text{C}) = 1200 \Omega \pm 1\%$
Required voltages	typical 2 - 5 V at $\Delta T = 30 \text{ K}$ ($0 \leq V_{\text{ström}} \leq 100 \text{ m/s}$)
Max. heater voltage @ 0 m/s	3V
Substrate material	ceramic

In general All data are temporary and valid in air. Other media and higher requirements upon request. No responsibility accepted.

Construction sizes

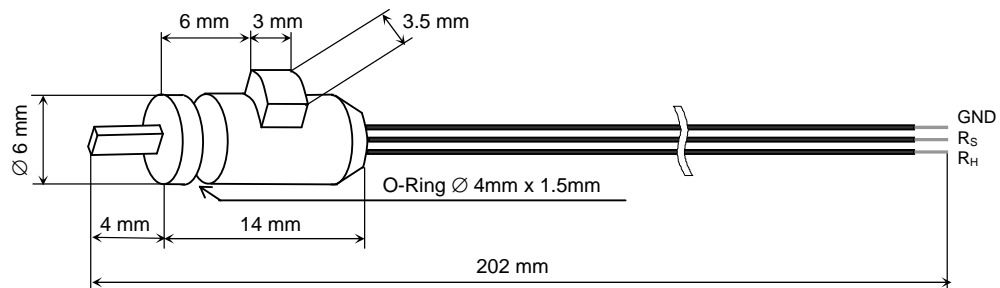

INNOVATIVE SENSOR TECHNOLOGY

ISTAG, Industriestrasse 2, CH-9630 Wattwil, Switzerland, Phone (+)41 71 987 73 73, Fax (+)41 71 987 73 77
e-mail info@ist-ag.com, www.ist-ag.com



Flow Sens FS1



Thermal Mass Flow Sensor for all-purpose use in Gases

Electronic circuit recommendation


As shown on the scheme to the right, the heater R_H and sensor R_S need to be connected in a bridge circuit. It is essential to determine the correct values of the resistors R_1 , R_2 , and R_3 . The bridge is in balance as soon as the desired temperature difference between R_S and R_H has reached e.g. 30K. At a changing flow the bridge voltage U_{Bs} needs to be controlled in dependence of the bridge balance V_1 - V_2 . The values for R_1 ... R_3 are depending on the temperature difference ΔT and the medium which should be measured. We will provide you with the values of R_1 ... R_3 , depending on the application.

For calibration the R_2 needs to be adjusted within a range of $\pm 5\%$.

The method of adjustment relies on the application.

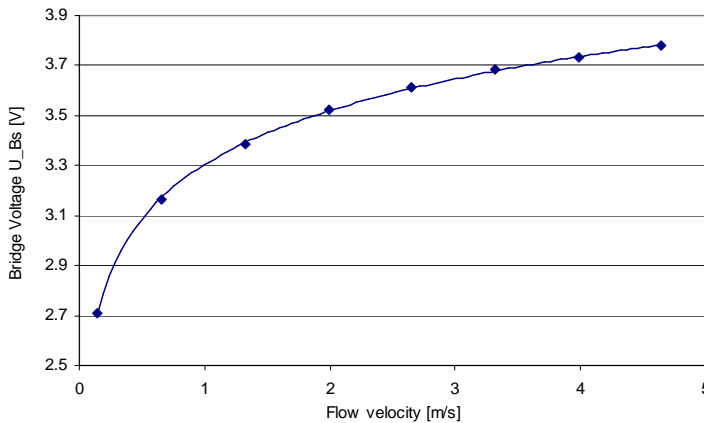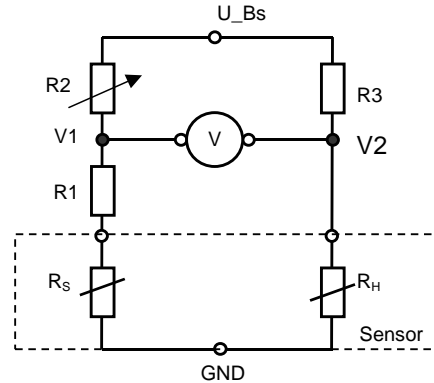

Typical signal – curve between 0 5 m/s

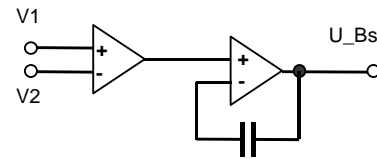

Principle of the heating controller

Customer-specific preparation

The electrical connection and the sensorpackaging we are able to develop and to produce customized.



INNOVATIVE SENSOR TECHNOLOGY

IST AG, Industriestrasse 2, CH-9630 Wattwil, Switzerland, Phone (+)41 71 987 73 73, Fax (+)41 71 987 73 77
e-mail info@ist-ag.com, www.ist-ag.com

