


**Universal
Panel Mounting**

Shock-Safe Fuseholders



- FaxBack Document # 501
- North American 1/4" x 1 1/4"
- International 5x20mm
- UL 512, IEC 257

No. **800816** for 1/4" x 1 1/4"
No. **800815** for 5x20mm







Carrier for 1/4" x 1 1/4" Fuses



Carrier for 5x20mm Fuses

Low Profile

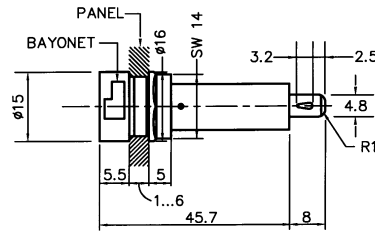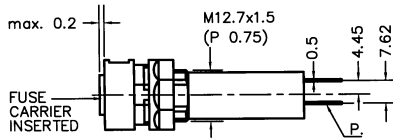

- **Rated Voltage:** 250V
- **Mounting:** 12.7mm diameter D-Hole or double D-Hole as desired
Admissible torque on plastic hex nut is 1.2Nm
- **Terminals:** Solderable or 4.8mm (3/16") quick connect
- **Material:** Body: Black thermoplastic (Polyamide PA 6.6), UL 94-V0 rated
Metal parts: Copper alloy, corrosion protected
Terminals: Tinned for soldering
- **Electrical Data:** Admissible fuse power dissipation: 2.5W at 40°C
Conductor cross-section min.: 2.5mm²
Rated current, approved: 10A acc. to SEMKO and VDE
16A acc. to UL and CSA
Testing voltage: 4kV, 50Hz, 1 min., dry
Protection class: IP 40 acc. to EN 60529


- **Approvals:** UL Recognized: File No. E 70164
CSA: File No. 47574
VDE: File No. 49838
SEMKO: File No. 8727099

- **Individual Part Numbers:**
Holder: No. 800 0000 00
Carrier, 1/4" x 1 1/4": No. 816 0000 00
Carrier, 5x20mm: No. 815 0000 00

No. **801816** for 1/4" x 1 1/4"
No. **801815** for 5x20mm



No. **802816** for 1/4" x 1 1/4"
No. **802815** for 5x20mm





Carrier for 1/4" x 1 1/4" Fuses





Carrier for 5x20mm Fuses

High Profile

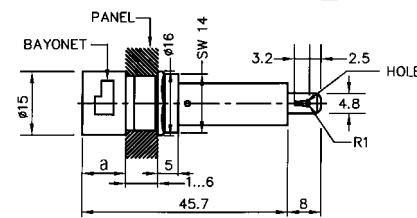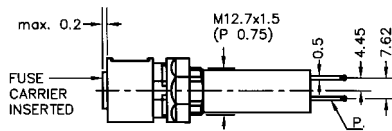

a = 10mm (801)
a = 15mm (802)



- **Rated Voltage:** 250V
- **Mounting:** 12.7mm diameter D-Hole or double D-Hole as desired
Admissible torque on plastic hex nut is 1.2Nm
- **Terminals:** Solderable or 4.8mm (3/16") quick connect
- **Material:** Body: Black thermoplastic (Polyamide PA 6.6), UL 94-V0 rated
Metal parts: Copper alloy, corrosion protected
Terminals: Tinned for soldering
- **Electrical Data:** Admissible fuse power dissipation: 2.5W at 40°C
Conductor cross-section min.: 2.5mm²
Rated current, approved: 10A acc. to SEMKO and VDE
16A acc. to UL and CSA
Testing voltage: 4kV, 50Hz, 1 min., dry
Protection class: IP 40 acc. to EN 60529

- **Approvals:** UL Recognized: File No. E 70164
CSA: File No. 47574
VDE: File No. 49838
SEMKO: File No. 8727099

- **Individual Part Numbers:**
Holder, 10mm Collar: No. 801 0000 00
Holder, 15mm Collar: No. 802 0000 00
Carrier, 1/4" x 1 1/4": No. 816 0000 00
Carrier, 5x20mm: No. 815 0000 00