


## Bipolar winding • Lead wire type

Model		Holding torque at 2-phase energization	Rated current	Wiring resistance	Winding inductance	Rotor inertia	Mass (Weight)
Single shaft	Double shafts	[N · m (oz · in) MIN.]	A/phase	Ω /phase	mH/phase	[ $\times 10^{-4}$ kg · m <sup>2</sup> (oz · in <sup>2</sup> )]	[kg (lbs) ]
<b>SH1421-5041</b>	<b>-5011</b>	0.23 (32.5)	1	3.3	8.0	0.044 (0.24)	0.24 (0.53)
<b>SH1421-5241</b>	<b>-5211</b>	0.23 (32.5)	2	0.85	2.1	0.044 (0.24)	0.24 (0.53)
<b>SH1422-5041</b>	<b>-5011</b>	0.34 (48.1)	1	4.0	14.0	0.066 (0.36)	0.29 (0.64)
<b>SH1422-5241</b>	<b>-5211</b>	0.34 (48.1)	2	1.05	3.6	0.066 (0.36)	0.29 (0.64)
<b>SH1424-5041</b>	<b>-5011</b>	0.48 (67.9)	1	4.7	15.0	0.089 (0.49)	0.38 (0.84)
<b>SH1424-5241</b>	<b>-5211</b>	0.48 (67.9)	2	1.25	3.75	0.089 (0.49)	0.38 (0.84)


## Pulse rate-torque characteristics

### ● SH1421-50 □□

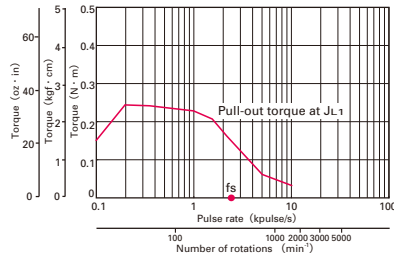


Constant current circuit  
 Source voltage : DC24V · operating current : 2A/phase,  
 2-phase energization (full-step)  
 $J_{L1} = [0.94 \times 10^{-4} \text{kg} \cdot \text{m}^2 (5.14 \text{oz} \cdot \text{in}^2)]$  Use the rubber coupling]

### ● SH1422-50 □□

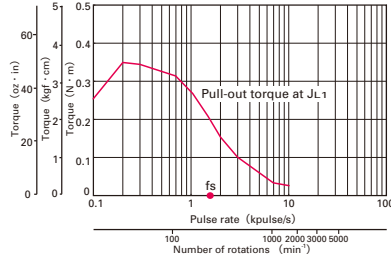


Constant current circuit  
 Source voltage : DC24V · operating current : 2A/phase,  
 2-phase energization (full-step)  
 $J_{L1} = [0.94 \times 10^{-4} \text{kg} \cdot \text{m}^2 (5.14 \text{oz} \cdot \text{in}^2)]$  Use the rubber coupling]

### ● SH1424-50 □□

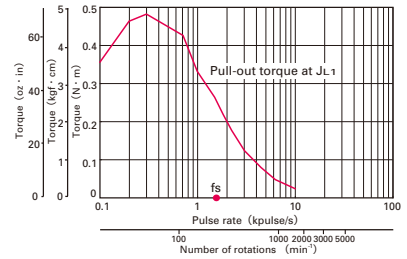


Constant current circuit  
 Source voltage : DC24V · operating current : 2A/phase,  
 2-phase energization (full-step)  
 $J_{L1} = [0.94 \times 10^{-4} \text{kg} \cdot \text{m}^2 (5.14 \text{oz} \cdot \text{in}^2)]$  Use the rubber coupling]

### ● SH1421-52 □□

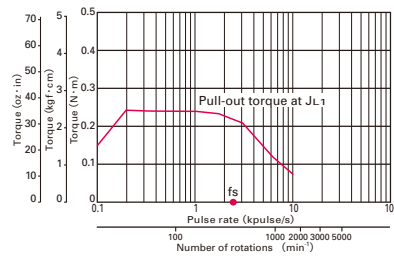


Constant current circuit  
 Source voltage : DC24V · operating current : 2A/phase,  
 2-phase energization (full-step)  
 $J_{L1} = [0.94 \times 10^{-4} \text{kg} \cdot \text{m}^2 (5.14 \text{oz} \cdot \text{in}^2)]$  Use the rubber coupling]

### ● SH1422-52 □□

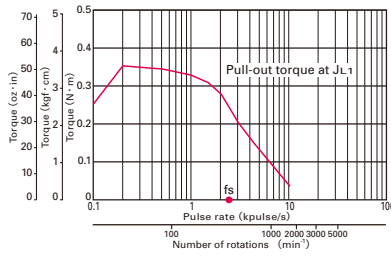

Constant current circuit  
 Source voltage : DC24V · operating current : 2A/phase,  
 2-phase energization (full-step)  
 $J_{L1} = [0.94 \times 10^{-4} \text{kg} \cdot \text{m}^2 (5.14 \text{oz} \cdot \text{in}^2)]$  Use the rubber coupling]

### ● SH1424-52 □□

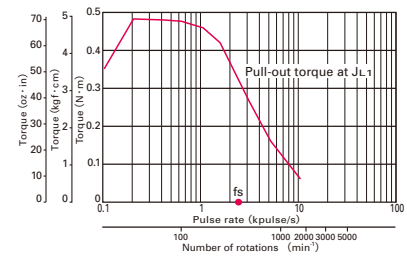


Constant current circuit  
 Source voltage : DC24V · operating current : 2A/phase,  
 2-phase energization (full-step)  
 $J_{L1} = [0.94 \times 10^{-4} \text{kg} \cdot \text{m}^2 (5.14 \text{oz} \cdot \text{in}^2)]$  Use the rubber coupling]

The data are measured under the drive condition of our company. The drive torque may vary depending on the accuracy of customer-side equipment.

# Motors [Unit: mm (inch)]


## □ 28mm (□ 1.10inch)

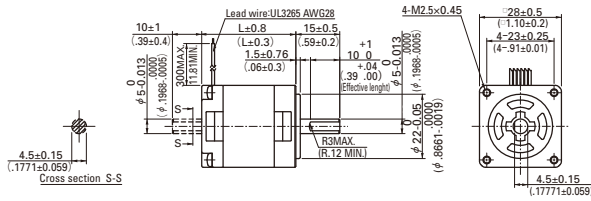

Connector type      Lead wire type

	Set part number	Motor model number	Motor length : mm (inch)	Cable type
Unipolar	DU14S281 ▽	SH2281-51 ▽ 1	32 (1.26)	Lead wire
	DU14S281 ▽	SH2281-52 ▽ 1	32 (1.26)	Lead wire
	DU14S285 ▽	SH2285-51 ▽ 1	51.5 (2.03)	Lead wire
	DU14S285 ▽	SH2285-52 ▽ 1	51.5 (2.03)	Lead wire
Bipolar	DB14S281 ▽	SH2281-56 ▽ 1	32 (1.26)	Lead wire
	DB14S281 ▽	SH2281-57 ▽ 1	32 (1.26)	Lead wire
	DB14S285 ▽	SH2285-56 ▽ 1	51.5 (2.03)	Lead wire
	DB14S285 ▽	SH2285-57 ▽ 1	51.5 (2.03)	Lead wire


## □ 35mm (□ 1.65inch)

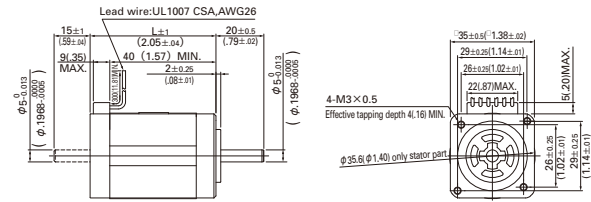

Lead wire type

	Set part number	Motor model number	Motor length : mm (inch)	Cable type
Unipolar	—	SH3533-12U △ 0	33 (1.25)	Lead wire
	—	SH3537-12U △ 0	37 (1.54)	Lead wire
	—	SH3552-12U △ 0	52 (1.89)	Lead wire


## □ 42mm (□ 1.65inch)

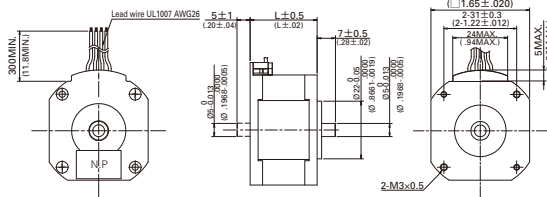

Lead wire type

	Set part number	Motor model number	Motor length : mm (inch)	Cable type
Bipolar	—	SS2421-50 △ 1	11.6 (.457)	Lead wire
	—	SS2422-50 △ 1	18.6 (.732)	Lead wire
	—	SS2423-50 △ 1	25.6 (1.008)	Lead wire


## □ 42mm (□ 1.65inch)

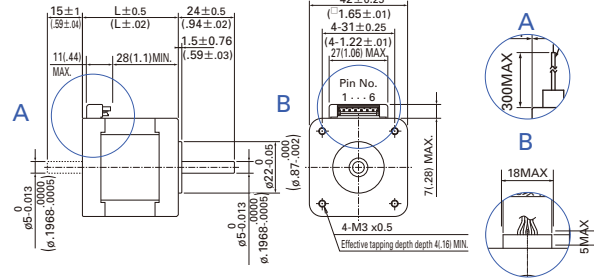

Connector type      Lead wire type

	Set part number	Motor model number	Motor length : mm (inch)	Cable type
Unipolar	DU15H521 ▽	103H5205-04 △ 0	33 (1.25)	Connector
	DU15H522 ▽	103H5208-04 △ 0	39 (1.54)	Connector
	DU15H524 ▽	103H5210-04 △ 0	48 (1.89)	Connector
	—	103H5209-04 △ 0	41 (1.61)	Connector


## □ 42mm (□ 1.65inch)

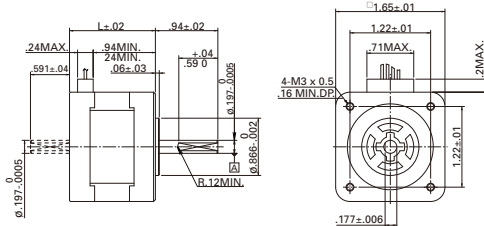

Connector type      Lead wire type

	Set part number	Motor model number	Motor length : mm (inch)	Cable type
Bipolar	DB14H521 ▽	103H5205-52 △ 0	33 (1.25)	Lead wire
	DB14H522 ▽	103H5208-52 △ 0	39 (1.54)	Lead wire
	DB14H524 ▽	103H5210-52 △ 0	48 (1.89)	Lead wire
	—	103H5205-50 △ 0	33 (1.25)	Lead wire
	—	103H5205-51 △ 0	33 (1.25)	Lead wire
	—	103H5208-50 △ 0	39 (1.54)	Lead wire
	—	103H5208-51 △ 0	39 (1.54)	Lead wire
	—	103H5209-50 △ 0	41 (1.61)	Lead wire
	—	103H5209-51 △ 0	41 (1.61)	Lead wire
	—	103H5209-52 △ 0	41 (1.61)	Lead wire
	—	103H5210-50 △ 0	48 (1.89)	Lead wire
	—	103H5210-51 △ 0	48 (1.89)	Lead wire

## □ 42mm (□ 1.65inch)

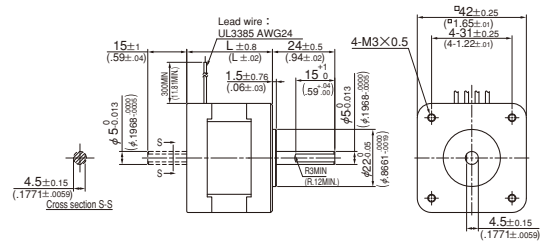

Lead wire type

	Set part number	Motor model number	Motor length : mm (inch)	Cable type
Unipolar	DU15S141 ▽	SH1421-04 ▽ 1	33 (1.25)	Lead wire
	DU15S142 ▽	SH1422-04 ▽ 1	39 (1.54)	Lead wire
	DU15S144 ▽	SH1424-04 ▽ 1	48 (1.89)	Lead wire
Bipolar	DB16H141 ▽	SH1421-52 ▽ 1	33 (1.25)	Lead wire
	DB16H142 ▽	SH1422-52 ▽ 1	39 (1.54)	Lead wire
	DB16H144 ▽	SH1424-52 ▽ 1	48 (1.89)	Lead wire

▽ : Motor shaft specification code

Motor shaft spec	Set type code	Motor type code
Single shaft	S	7
Double shafts	D	3

△ : Motor shaft specification code

Motor shaft spec	Set type code	Motor type code
Single shaft	S	4
Double shafts	D	1