



2-phase stepping motor

42mm sq.(1.65inch sq.)

103H52
1.8 °/step


Unipolar winding · Connector type

| Model | | Holding torque at 2-phase energization [N · m (oz · in) MIN.] | Rated current A/phase | Wiring resistance /phase | Winding inductance mH/phase | Rotor inertia [x10 ⁻⁴ kg · m ² (oz · in ²)] | Mass (Weight) [kg (lbs)] |
|---------------|---------------|--|--------------------------|-----------------------------|--------------------------------|---|---------------------------------|
| Single shaft | Double shafts | | | | | | |
| 103H5205-0440 | -0410 | 0.2 (28.32) | 1.2 | 2.4 | 2.3 | 0.036 (0.20) | 0.23 (0.51) |
| 103H5208-0440 | -0410 | 0.3 (42.48) | 1.2 | 2.9 | 3.4 | 0.056 (0.31) | 0.29 (0.64) |
| 103H5209-0440 | -0410 | 0.32 (45.31) | 1.2 | 3 | 3.9 | 0.062 (0.34) | 0.31 (0.68) |
| 103H5210-0440 | -0410 | 0.37 (52.39) | 1.2 | 3.3 | 3.4 | 0.074 (0.40) | 0.37 (0.82) |

Bipolar winding · Lead wire type

| Model | | Holding torque at 2-phase energization [N · m (oz · in) MIN.] | Rated current A/phase | Wiring resistance /phase | Winding inductance mH/phase | Rotor inertia [x10 ⁻⁴ kg · m ² (oz · in ²)] | Mass (Weight) [kg (lbs)] |
|---------------|---------------|--|--------------------------|-----------------------------|--------------------------------|---|---------------------------------|
| Single shaft | Double shafts | | | | | | |
| 103H5205-5040 | -5010 | 0.23 (32.57) | 0.25 | 54 | 78 | 0.036 (0.20) | 0.23 (0.51) |
| 103H5205-5140 | -5110 | 0.25 (35.40) | 0.5 | 13.4 | 23.4 | 0.036 (0.20) | 0.23 (0.51) |
| 103H5205-5240 | -5210 | 0.265 (37.53) | 1 | 3.4 | 6.5 | 0.036 (0.20) | 0.23 (0.51) |
| 103H5208-5040 | -5010 | 0.35 (49.56) | 0.25 | 66 | 116 | 0.056 (0.31) | 0.29 (0.64) |
| 103H5208-5140 | -5110 | 0.38 (53.81) | 0.5 | 16.5 | 34 | 0.056 (0.31) | 0.29 (0.64) |
| 103H5208-5240 | -5210 | 0.39 (55.23) | 1 | 4.1 | 9.5 | 0.056 (0.31) | 0.29 (0.64) |
| 103H5209-5040 | -5010 | 0.38 (53.81) | 0.25 | 71.4 | 133 | 0.062 (0.34) | 0.31 (0.68) |
| 103H5209-5140 | -5110 | 0.41 (58.06) | 0.5 | 18.2 | 39 | 0.062 (0.34) | 0.31 (0.68) |
| 103H5209-5240 | -5210 | 0.425 (60.18) | 1 | 4.4 | 11 | 0.062 (0.34) | 0.31 (0.68) |
| 103H5210-5040 | -5010 | 0.465 (65.85) | 0.25 | 80 | 123.3 | 0.074 (0.40) | 0.37 (0.82) |
| 103H5210-5140 | -5110 | 0.49 (69.39) | 0.5 | 20 | 35 | 0.074 (0.40) | 0.37 (0.82) |
| 103H5210-5240 | -5210 | 0.51 (72.22) | 1 | 4.8 | 9.5 | 0.074 (0.40) | 0.37 (0.82) |

Pulse rate-torque characteristics

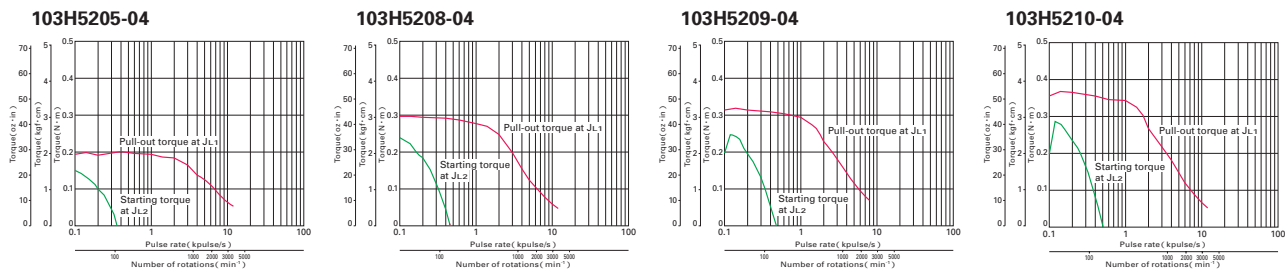

Constant current circuit
Source voltage : DC24V · operating current : 1.2A/phase,
2-phase energization(full-step)
J_{L1}=[0.94x10⁻⁴kg · m²(5.14 oz · in²) use the rubber coupling]
J_{L2}=[0.8x10⁻⁴kg · m²(4.37 oz · in²) use the direct coupling]

Constant current circuit
Source voltage : DC24V · operating current : 1.2A/phase,
2-phase energization(full-step)
J_{L1}=[0.94x10⁻⁴kg · m²(5.14 oz · in²) use the rubber coupling]
J_{L2}=[0.8x10⁻⁴kg · m²(4.37 oz · in²) use the direct coupling]

Constant current circuit
Source voltage : DC24V · operating current : 1.2A/phase,
2-phase energization(full-step)
J_{L1}=[0.94x10⁻⁴kg · m²(5.14 oz · in²) use the rubber coupling]
J_{L2}=[0.8x10⁻⁴kg · m²(4.37 oz · in²) use the direct coupling]

Constant current circuit
Source voltage : DC24V · operating current : 1.2A/phase,
2-phase energization(full-step)
J_{L1}=[0.94x10⁻⁴kg · m²(5.14 oz · in²) use the rubber coupling]
J_{L2}=[0.8x10⁻⁴kg · m²(4.37 oz · in²) use the direct coupling]