

Type C1Q

Surface Mount Very Fast-Acting Chip Fuse

1206 size
RoHS 6 Compliant



C1QDNOV2010



Electrical Characteristics (ULICSA STD. 248-14)

Testing current	Blow Time	
	Minimum	Maximum
100%	4 hrs	N/A
200%	N/A	5 sec
300%	N/A	0.2 sec

Approvals



Safety Agency Approvals	Amp range / Volt @ I.R. ability
UL Listed File No. E20624	250mA - 5A / 125V AC @ 100A and 63V DC @ 50A
SP Certified File No. LR39772	
UL Recognized File No. E20624	7A / 63V AC and DC @ 50A

RoHS 6 Compliant Product

RoHS Reflow Reference : JEDEC J-STD-020C (260°C, 40 sec max)
RoHS Wave Soldering Compatible : (260°C, 10 sec max)

Environmental Specification

Shock Resistance

MIL-STD-202G, Method 213B, Test Condition I
(100 G's peak for 6 milliseconds; Sawtooth Waveform)

Vibration Resistance

MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion)

Salt Spray Resistance

MIL-STD-202G, Method 101E, Test condition B (48 hrs)

Insulation Resistance

MIL-STD-202G, Method 302, Test Condition A
(After Opening) 10,000 ohms minimum

Solderability

MIL-STD-202G, Method 208H

Soldering Heat Resistance

MIL-STD-202G Method 210F, Test Condition C. Top Side
(260°C, 20 sec)
MIL-STD-202G Method 210F, Test Condition D. Bottom Side
(260°C, 10 sec)

Thermal Shock Resistance

MIL-STD-202G, Method 107G, Test Condition B
(-65°C to +125°C)

Operating Temperature

-55°C to +125°C

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @ 100% In (Volt) max.	Melting I ² T <10mSec (A ² Sec)	Melting I ² T @ 10 In (A ² Sec)	Maximum Power Dissipation (W)
C1Q 250	250mA	0.88	0.31	0.0018	0.0001	0.10
C1Q 375	375mA	0.47	0.26	0.0044	0.0004	0.12
C1Q 500	500mA	0.32	0.23	0.008	0.001	0.14
C1Q 750	750mA	0.175	0.19	0.019	0.002	0.18
C1Q 1	1A	0.119	0.17	0.035	0.004	0.21
C1Q 1.25	1.25A	0.087	0.16	0.057	0.006	0.24
C1Q 1.5	1.5A	0.070	0.15	0.084	0.010	0.28
C1Q 2	2A	0.049	0.14	0.15	0.019	0.35
C1Q 2.5	2.5A	0.038	0.14	0.25	0.032	0.43
C1Q 3	3A	0.032	0.14	0.37	0.050	0.52
C1Q 3.5	3.5A	0.028	0.14	0.53	0.072	0.62
C1Q 4	4A	0.025	0.14	0.67	0.094	0.71
C1Q 5	5A	0.021	0.15	1.10	0.16	0.96
C1Q 7	7A	0.018	0.18	3.10	0.37	1.57

Consult manufacturer for other ratings

HALOGEN FREE =
LEAD FREE =

Physical Specification

Materials

Ceramic Substrate / Printed Element

Marking

On fuse:

None


Label on reel:

"bel", "C1Q" "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and , (China RoHS compliant)

Packaging

5,000 fuses in 7 inches dia. Reel, 8 mm wide tape, 4mm pitch, per EIA Standard 481-C (equivalent IEC-286 part 3)

Mechanical Dimensions

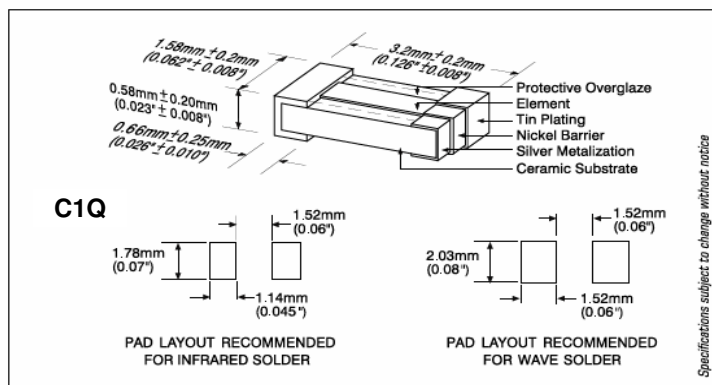

ORDERING INFORMATION SEE LAST 2 PAGES


Type C1Q
Surface Mount Very Fast-Acting Chip Fuse

I206 size
 RoHS 6 Compliant



C1QCNOV2010

C1Q - TIME CURRENT CHARACTERISTIC CURVE

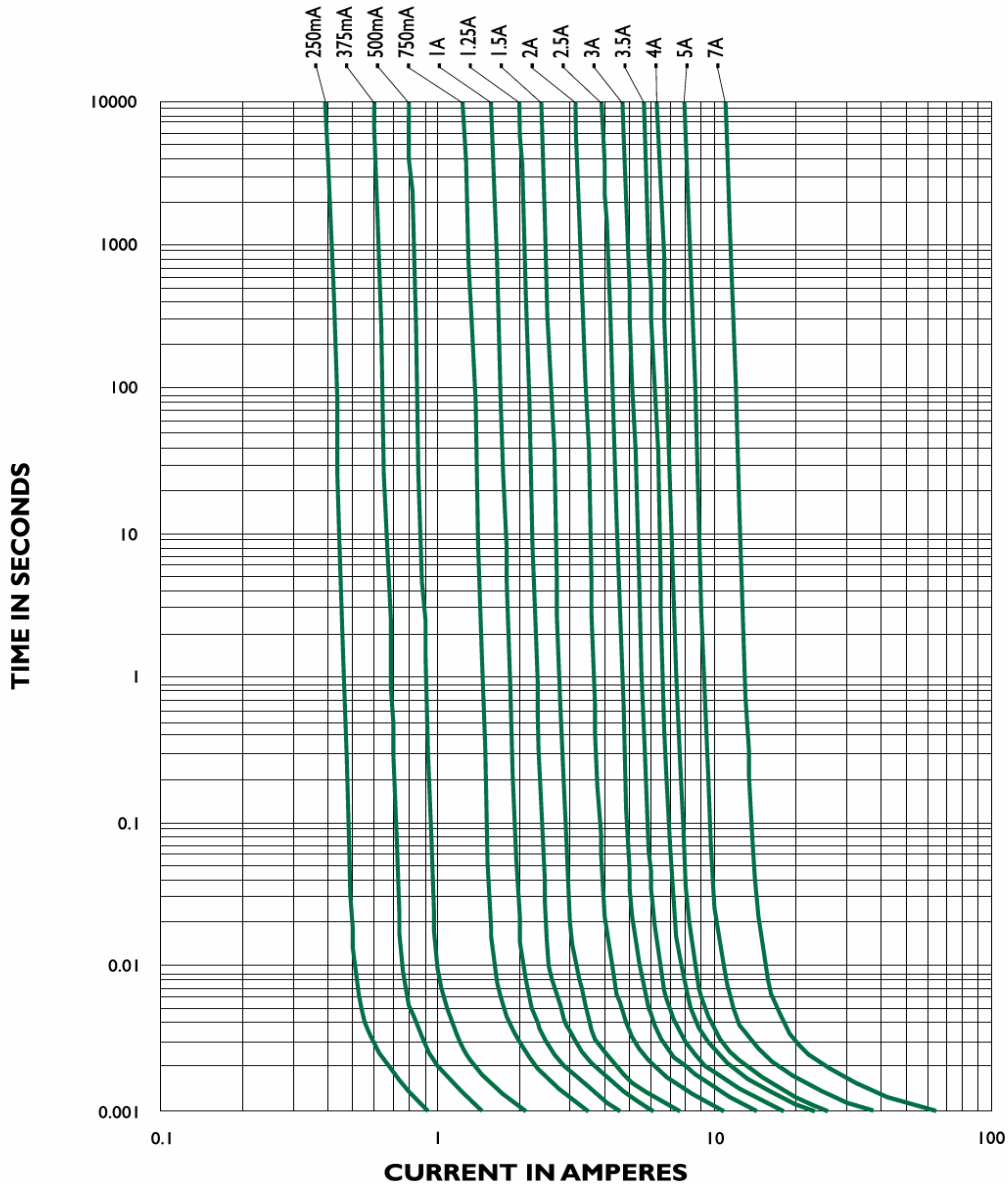

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

Corporate Office
Bel Fuse Inc.
 206 Van Vorst Street, Jersey City, NJ 07302
 Tel: 201-432-0463
 Fax: 201-432-9542
 E-Mail: belfuse@belfuse.com
 Website: www.belfuse.com

Far East Office
Bel Fuse Ltd.
 8F/8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel: 852-2328-5515
 Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Preston PR1 8UQ
 Lancashire, U.K
 Tel: 44-1772-556601
 Fax: 44-1772-888366