

CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF COOPER INDUSTRIES, INC. IT IS NOT FOR PUBLIC DISCLOSURE. POSSESSION OF THE INFORMATION DOES NOT CONVEY ANY RIGHT TO LOAN, SELL OR DISCLOSE THE INFORMATION. UNAUTHORIZED REPRODUCTION OR USE OF THE INFORMATION IS PROHIBITED. THIS DOCUMENT IS TO BE RETURNED TO COOPER INDUSTRIES, INC. UPON COMPLETION OF THE PURPOSE FOR WHICH IT IS LOANED OR UPON REQUEST.

COPYRIGHT Cooper Industries Inc.
This is an unpublished work. The disclosure of this work is limited to select personnel. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright law and all rights thereunder are reserved by Cooper Industries, Inc.

SCALE 2X

UNLESS OTHERWISE SPECIFIED TOLERANCES TO BE:
METRIC ±.13mm
INCHES ±.005"
ANGULAR ±2°


▲ (O) INDICATES CRITICAL DIMENSION OR FEATURE

PAGE 1


DATE	3-8-02	NO.	KTK 35-50
TITLE LIMITER			
SUP NO	KTK 35-50	C	DATED 10-23-00
DWG	BAM	CK	CHANGE E
ENG			SB02087
COOPER Bussmann St. Louis, MO 63178			
DISTRIBUTION 46636		56	J

Ⓞ METRIC (mm)
INCHES

Ⓞ REVISED &
REDRAWN



CUSTOMER PRINT

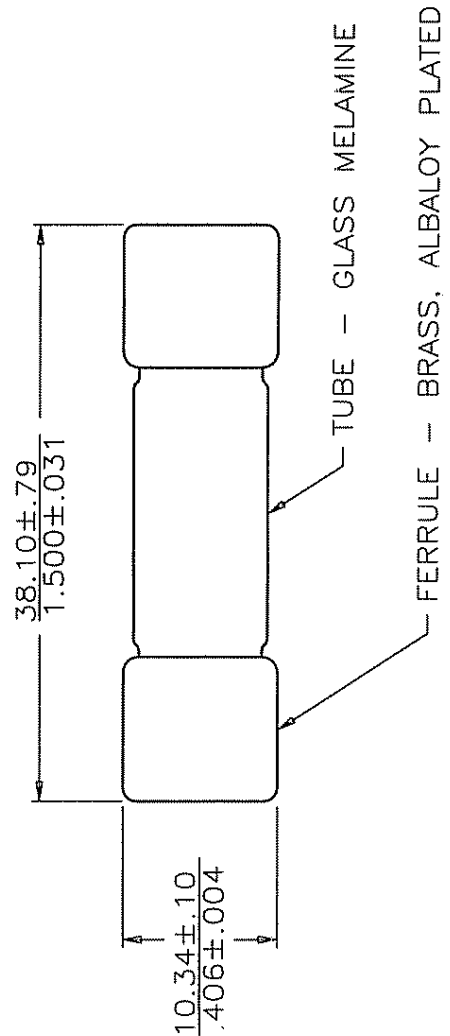

AMP RATING	PART NO.
35	KTK-35
40	KTK-40
45	KTK-45
50	KTK-50

DESIGNED TO:
OPEN IN 2-4 SECONDS AT 500% RATING WHEN
TESTED IN A STANDARD 30 AMPERE CIRCUIT