

Miniature Fuse, 5 x 20 mm, Time-Lag T, Telecom, H, 250 VAC



IEC 60127-2 · 250VAC · Time-Lag T



### Description

- Ceramic Tube

### Standards

- IEC 60127-2/5  
 - UL 248-14  
 - CSA C22.2 no. 248.14  
 - Telcordia GR-1089  
 - UL 60950 / IEC 60950  
 - ITU-T K.20 and K.21  
 - TIA-968-A

### Approvals


- VDE Certificate Number: 40014395  
 - UL File Number: E41599

### References


#### Weblinks

General Product Information, Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check

### Technical Data

Rated Voltage	250VAC
Rated Current	0.25 - 3.15A
Breaking Capacity	1500A
Characteristic	Time-Lag T
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Tube	Ceramic
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	1 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Current, Voltage, Characteristic, Breaking Capacity, Approvals

### Dimensions

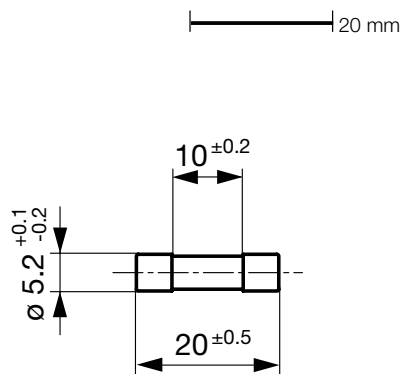

### Pre-Arcing Time

Rated Current In	1.0 x In min.	2.5 x In min.	2.5 x In max.	10.0 x In max.	10.0 x In max.	4.0 x In max.	10.0 x In min.	10.0 x In max.
0.5 A - 6.3 A	60 min	30 min	250 ms	80 s	50 ms	5 s	5 ms	150 ms

### Variants

Rated Current [A]	Rated Voltage [VAC]	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> typ. [mW]	Melting Pt 10.0 Intyp. [A²s]	GR-1089-CORE [A]	UL60950	ITU - Lightning Surge [A]	ITU - Power Induc-	ITU - Power Contact [A]	Order Number
0.5	250	360	500	0.5	> 14.0	●	27.7	●	1500.0	2020.0001
0.63	250	330	500	1.55	> 14.0	●	57	●	1500.0	2020.0002
0.8	250	260	500	2.3	> 14.0	●	67	●	1500.0	2020.0003
1	250	180	500	1.1	> 14.0	●	57	●	1500.0	2020.0004
1.25	250	150	500	1.86	> 14.0	●	67	●	1500.0	2020.0005
1.6	250	130	500	4.35	> 14.0	●	67	●	1500.0	2020.0006
2	250	120	600	9.2	> 14.0	●	67	●	1500.0	2020.0007
2.5	250	100	600	11.7	> 14.0	●	67	●	1500.0	2020.0008
3.15	250	100	800	33.7	> 14.0	●	67	●	1500.0	2020.0009

1) 1500 A @ 250 VAC

**Packaging Unit** Plastic Bag (10 pcs.)

### [Kennlinien]

