

# Thin-Film Low Pass Filter



## LP0402N Series Harmonic Lead-Free LGA Termination

### RFAP TECHNOLOGY

The LP0402N Series Harmonic Low Pass Filter is based on the proprietary RFAP Thin-Film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

The RFAP Harmonic Low Pass Filter is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

### APPLICATIONS

- Wireless communications
- Wireless LAN's
- GPS
- WiMAX

### LAND GRID ARRAY ADVANTAGES

- Inherent Low Profile
- Self Alignment during Reflow
- Excellent Solderability
- Low Parasitics
- Better Heat Dissipation

### HOW TO ORDER

**LP**  
T  
Style

**0402**  
T  
Size

**N**  
T  
Type

**XXXX**  
T  
Frequency  
MHz

**X**  
T  
Sub-Type

**N**  
T  
Termination  
LGA  
Lead Free

**TR**  
T  
Taped & Reeled

## 4

### QUALITY INSPECTION

Finished parts are 100% tested for electrical parameters and visual characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance: 125°C, IR, 4 hours

### TERMINATION


Nickel/Lead-Free solder coating compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

# Thin-Film Low Pass Filter




## LP0402N Series Harmonic Lead-Free LGA Termination

**DIMENSIONS:** millimeters (inches)  
**(Bottom View)**

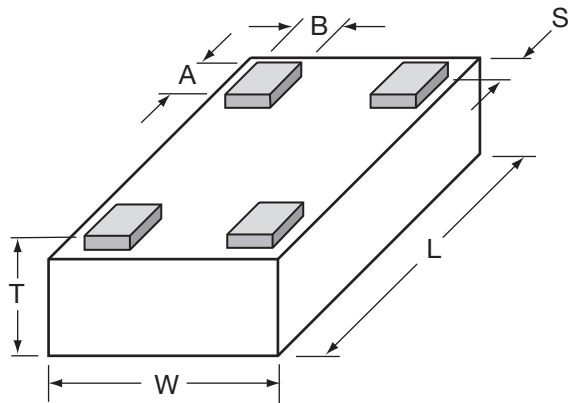


<b>L</b>	1.0±0.05 (0.040±0.002)	<b>A</b>	0.20±0.06 (0.008±0.002)
<b>W</b>	0.58±0.04 (0.023±0.002)	<b>B</b>	0.18±0.05 (0.007±0.002)
<b>T</b>	0.35±0.5 (0.014±0.002)	<b>S</b>	0.05±0.05 (0.002±0.002)

**TERMINALS (Top View)**



**RECOMMENDED PAD LAYOUT (mm)**

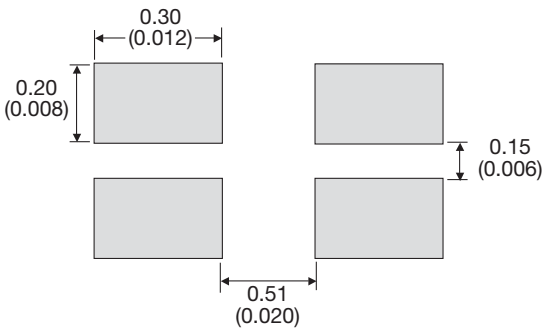

## ELECTRICAL CHARACTERISTICS

**(Guaranteed over -40°C to +85°C Operating Temperature Range)**



P/N	Frequency Band [MHz]	I. Loss [dB]	R. Loss [dB]	Attenuation [dB]
LP0402N3500ANTR	3400-3600	0.3 typ (0.5 max)	19	30 @ 2xF <sub>0</sub> 20 @ 3xF <sub>0</sub>
LP0402N5200ANTR	5050-5350	0.2 typ (0.5 max)	19	30 @ 2xF <sub>0</sub> 20 @ 3xF <sub>0</sub>



# Thin-Film Low Pass Filter

**AVX RF**

## LP0402N Series Harmonic Lead-Free LGA Termination Test Jig

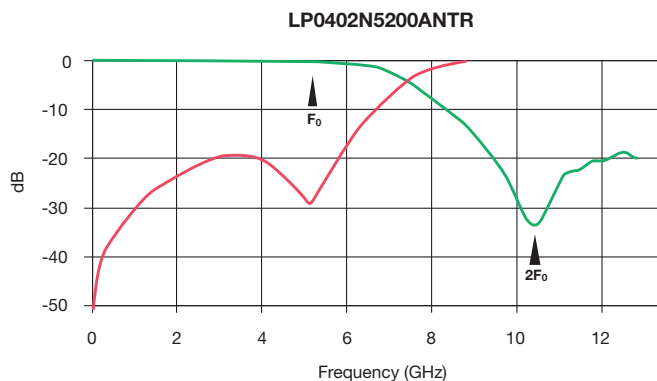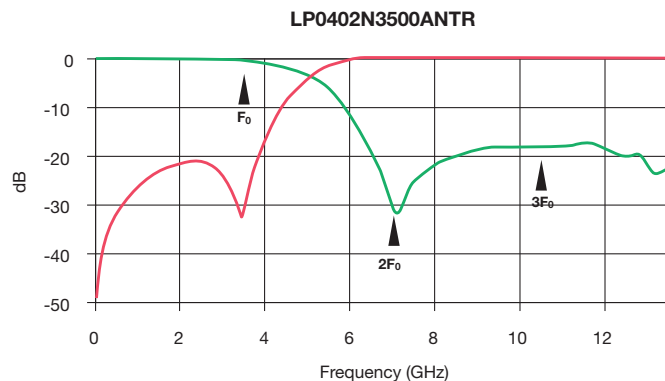

### TEST JIG FOR LP0402 LOW PASS FILTER

#### GENERAL DESCRIPTION

These jigs are designed for testing the LP0603 LGA Low Pass Filters using a Vector Network Analyzer.

They consist of a dielectric substrate, having 50Ω microstrips as conducting lines and a bottom ground plane located at a distance of 0.127mm from the microstrips.

The substrate used is Neltec's NH9338ST0127C1BC (or similar).

The connectors are SMA type (female), 'Johnson Components Inc.' Product P/N: 142-0701-841 (or similar).

Both a measurement jig and a calibration jig are provided.

The calibration jig is designed for a full 2-port calibration, and consists of an open line, short line and through line. LOAD calibration can be done by a 50Ω SMA termination.

#### MEASUREMENT PROCEDURE


Follow the VNA's instruction manual and use the [calibration jig](#) to perform a full 2-Port calibration in the required bandwidths.

Solder the filter to the [measurement jig](#) as follows:

Input (Filter)	➔ Connector 1 (Jig)	GND (Filter)	➔ GND (Jig)
Output (Filter)	➔ Connector 2 (Jig)	GND (Filter)	➔ GND (Jig)

Set the VNA to the relevant frequency band. Connect the VNA using a 10dB attenuator on the jig terminal connected to port 2 (using an RF cable).

#### Measurement

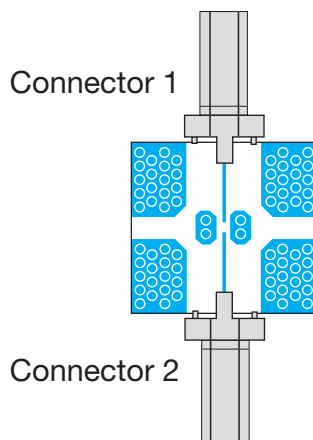

#### Calibration Jig

