



**SMQ / No. 417/418 UL 248-14, 125V, F**



**Dimensions (mm)**



**Pad Layout**



**Time-Current Characteristic**

Quick Acting (F)

**Standard**

UL 248-14  
CSA C22.2 No. 248.14

**Approvals**

UL Recognized: File No. E 67006  
CSA Certified: File No. LR 702775

**Features**

Flame resistant ceramic housing  
For line or low voltage applications  
Low voltage drop  
Internationally approved

**WebLinks**

**Data Sheet**

[www.wickmann.com/products/417.pdf](http://www.wickmann.com/products/417.pdf)

**Approval Certificates**

[www.wickmann.com/approvals](http://www.wickmann.com/approvals)

**Time-Current Curve**

Page 70  
[www.wickmann.com/itcurves](http://www.wickmann.com/itcurves)

**Packaging**

Page 118  
[www.wickmann.com/pack](http://www.wickmann.com/pack)

**FaxBack Document # 325**

**Specifications**

**Packaging**

000: Blister Tape (1000 pcs.)

**Materials**

Housing: Ceramic  
Element: Wire  
Terminals: Copper alloy, tin plated

**Operating Temperature**

-55°C to +125°C (consider de-rating)

**Stock Conditions**

+10°C to +60°C  
relative humidity ≤ 75% yearly average,  
without dew, maximum value for 30 days-95%

**Vibration Resistance**

2 hrs. in each axis  
10 - 55 - 10Hz at 1.5mm amplitude

**Solderability**

235°C, 3 sec. (IEC 60068-2-58)

**Soldering Heat Resistance**

260°C, 10 sec. (IEC 60068-2-58)


**Minimum Cross Section, Copper**

Conducting path - 0.1mm<sup>2</sup> (417) / 0.2mm<sup>2</sup> (418)  
Path thickness - 0.035mm (417) / 0.07mm (418)

**Mounting**

Solder the fuse with the marked side facing up  
Avoid circuit traces below the fuse


**Marking**

, Current Rating

**Unit Weight**




0.23g (approx.)

**Limits for Pre-arcing Time**

Rated Current	2.0 x I <sub>Rated</sub>	2.0 x I <sub>Rated</sub> 
400mA ... 10.00A	< 60s	< 5s




**Permissible continuous operating current is ≤ 70% at ambient temperature of 23°C (73.4°F).**

Rated Current No. 417	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I <sub>Rated</sub> max. (mV) 	Power Dissipation 1.0 x I <sub>Rated</sub> max. (mW) 	Melting Integral 10 x I <sub>Rated</sub> max. (A <sup>2</sup> s) 	Approvals UR CSA
400mA	0400	125V		440	180	0.031	• •
500mA	0500	125V		420	210	0.036	• •
630mA	0630	125V		400	255	0.05	• •
800mA	0800	125V		350	280	0.17	• •
1.00A	1100	125V	50A / 125VAC	200	200	0.2	• •
1.25A	1125	125V	50A / 60VDC	195	245	0.31	• •
1.60A	1160	125V	50-60Hz	190	305	0.53	• •
2.00A	1200	125V	cos φ = 1.0	185	370	0.95	• •
2.50A	1250	125V		180	450	1.5	• •
3.15A	1315	125V		175	555	2.6	• •
4.00A	1400	125V		170	680	4.5	• •
5.00A	1500	125V		150	750	8.1	• •
No. 418 for short circuit back-up protection							
6.30A	1630	75V	50A / 75VAC	100	630	14	• •
7.00A	1700	75V	50A / 60VDC	95	665	16	• •
8.00A	1800	75V	50-60Hz	90	720	18	• •
10.00A	2100	75V	cos φ = 1.0	85	850	24	• •

**Order Information**

Qty.	Order-Number	Series	Amp Code	Packaging

## SMQ / No. 417

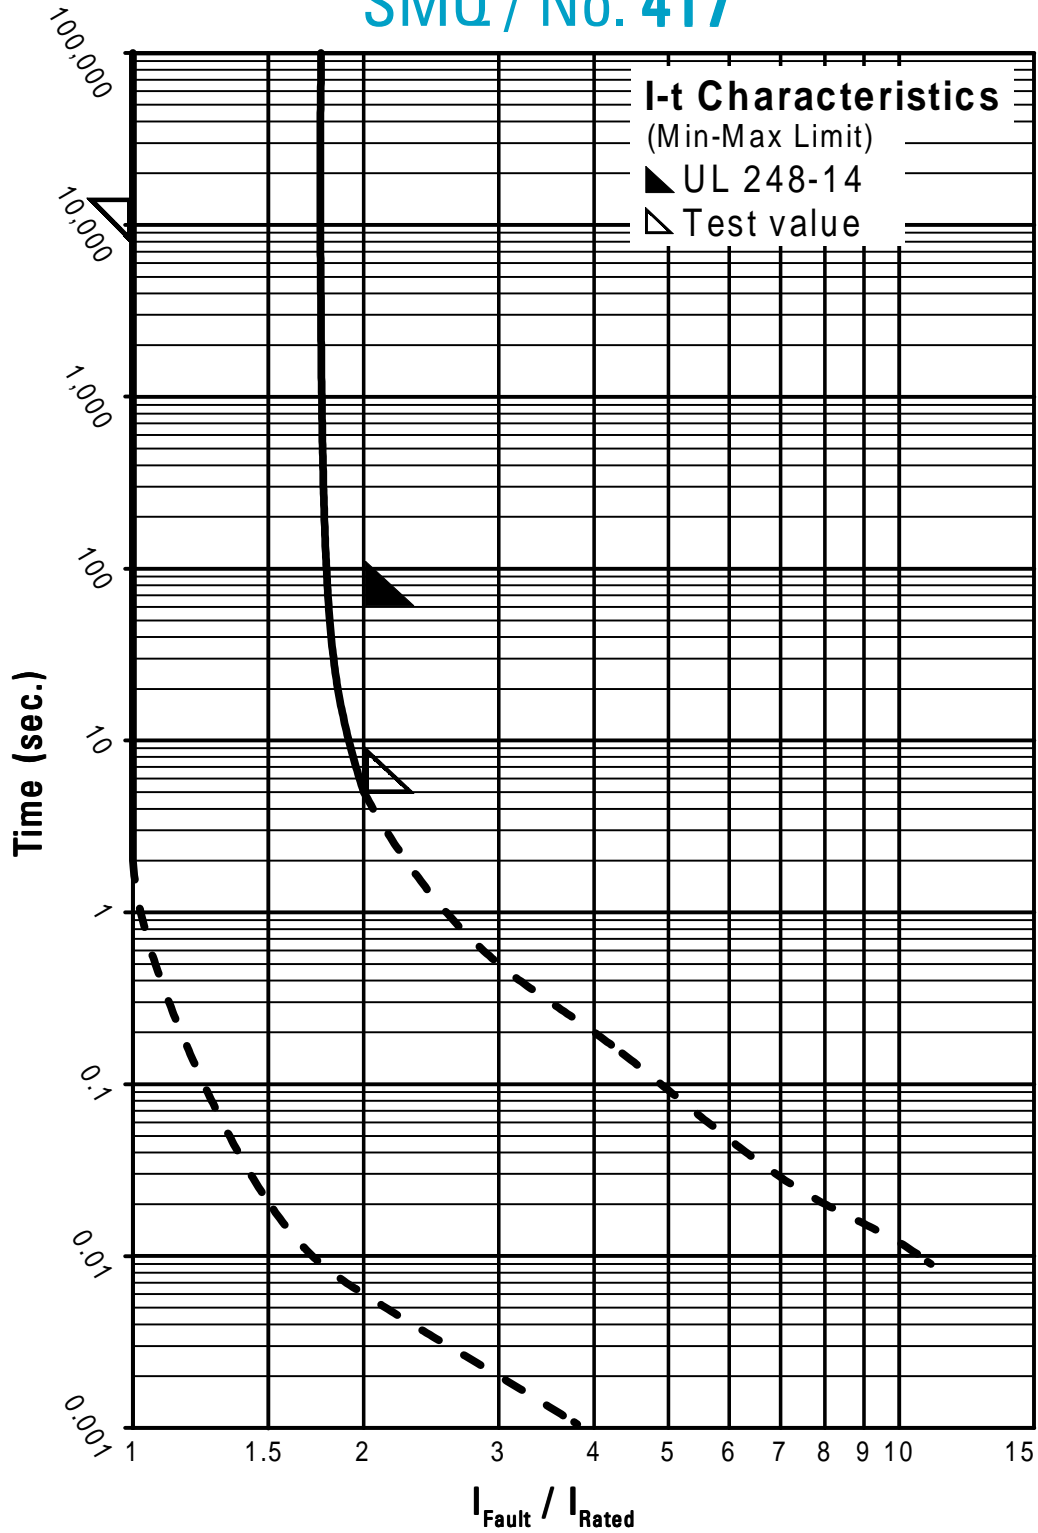

Contact WICKMANN for individual I-t curves