



LineGard | PGFI Series 20 Amp Portable Series (Cord) GFCI / ELCI

INTRODUCTION

The LineGard™ 20 Amp Portable Series is an industrial grade ground fault circuit interrupter designed and manufactured by North Shore Safety, Ltd., a leader in innovated safety products. This product is the “Go Anywhere” protection device. Rated for 20 amps and available at 120 VAC, 240 VAC, 208 VAC, or 277 VAC (UL 1053 compliant), the device is also available with either manual (safe start) or automatic reset configuration. Standard offerings include products with plug and connector or flying leads for field configuring which can be constructed into stand-alone cord sets or equipment integrated power supply cords. The product series is well suited for wet location use with an achieved NEMA 4X rating.

Note that any power cord integrated with this device becomes OSHA compliant for portable power usage in confined space: OSHA 29 CFR 1926.404(b)(1)(ii) and 29 CFR 1926.405(a)(2)(ii)(G). Additionally, this product meets the requirements of NEC 590.6(a) & (b).

FEATURES

- Power and fault status indicators
- Electro-mechanically latched contacts will not de-latch under rough service usage
- Chemical and UV resistant enclosure
- Class A cULus 943 listed
- NEMA 4X rated (indoor / outdoor use)
- Double insulated user interface for added safety
- Available in automatic or manual reset configurations*
- Available with wiring devices or flying leads
- 2-year manufacturer’s warranty

SPECIFICATIONS

Listing Type	cULus Listed Class A UL 943 CSA 22.2 No. 144
Rated Supply Voltage	120 VAC, 240 VAC, 208 VAC, 277 VAC (UL 1053 compliant)
Rated Current	Up to 20 Amps or rating of wiring device and/or cable
Trip Level, Class A	5mA +/- 1mA (UL 943)
Operating Frequency	60 Hz
Reset Type¹	Automatic or Manual
Ground Trip Current	4 mA to 6 mA
Overload Current	90 Amps @ 125VAC
Insulation Voltage	1,500 VRMS for 1 minute
Endurance Operations	3000 operations

1. Manual configuration should be specified if automatic start-up after power restoration of circuit power creates an unsafe condition.

2. Integrated or replacement cable must be indoor/outdoor 3-conductor cable of type ST, SJT, SE, SJE, SO or SJO


RELATED CODES

Confined Space	OSHA 29 CFR 1926.404 (b)(1)(ii), OSHA 29 CFR 1926.405 (a)(2)(ii)(G)
Construction Sites	(NEC 590.6)
Commercial Garages	(NEC 511.12)
Outdoor Signs	(NEC 600.10)
Fountains & Water Displays	(NEC 680.58)
Spa & Hot Tubs	(NEC 680.40)
Marinas & Boat Yards	(NEC 555.3)

APPLICATION OPPORTUNITIES:

Electrical wet locations
Power generators
Agricultural equipment
Outdoor electrical equipment
Cement cutting equipment
Portable electric heaters
Submersible pumps
Pipeline heaters
Automotive garages
Industrial part washers
Outdoor signage
De-icing equipment (roof heaters)

DECISION TABLES

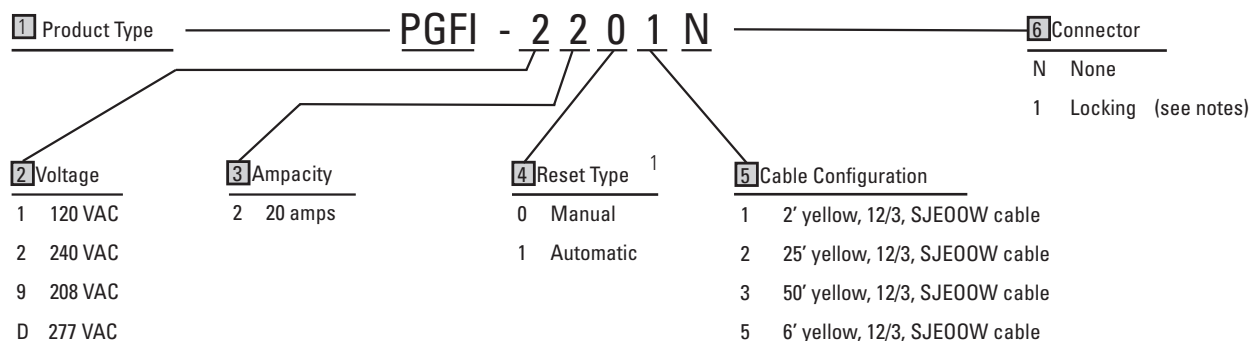

- Note:
1. Manual configuration should be specified if automatic power-up, after power restoration of circuit power, could create an unsafe condition.
 2. Units are configured with SJTW cable and molded locking non-watertight connectors configured to 20 Amps.
NEMA configurations for the 120 VAC and 208/240 VAC are L5-20 and L6-20 respectively. 277 VAC configurations are L7-20
 3. Integrated or replacement cable must be indoor/outdoor 3-conductor cable of type ST, SJT, SE, SJE, SO or SJO
 4. Custom cord sets and watertight connectors are available. Please consult Airpax

NEMA and IEC 309 Connectors available



Flying Leads (SJ00W)



This document is generated from the AIRPAX™ full-line catalog #2455005000 printed in USA, January 2011

BUSINESS CENTERS

Sensata Technologies

807 Woods Road
Cambridge, MD 21613, USA
Phone: +1 410-228-1500
Brands: Airpax™

Sensata Technologies Inc.

529 Pleasant Street
Attleboro, MA 02703, USA
Phone: +1 508-236-3287
Brands: Klixon™, Sensata Technologies™

Sensata Technologies

4467 White Bear Lake Parkway
St. Paul, MN 55110, USA
Phone: +1 800-553-6418
Brands: Dimensions™

Sensata Technologies Holland B.V.

Kolthofsingel 8
7602 EM Almelo, The Netherlands
Phone: +31 546 87 95 55
Brands: Klixon™, Sensata Technologies™

Sensata Technologies China Co., Ltd.

Novel Plaza, 8th Floor
128 Nanjing Road West
Shanghai, 20003
People's Republic of China
Phone: +86 21 23061500
Brands: Klixon™, Sensata Technologies™

Sensata Technologies Korea Ltd.

29F, Trade Tower
159-1 SamSung-Dong, KangNam-Ku, Seoul
135-729, Korea
Phone: +81-2-551-2918
Brands: Klixon™, Sensata Technologies™

Sensata Technologies Japan Ltd.

305, Tanagashira
Oyama-cho, Sunto-gun, Shizuoka-ken
Japan, 410-1396
Phone: +81 550 78 1211
Brands: Klixon™, Sensata Technologies™

Sensata Technologies Nihon-Airpax

6-3, Chi Yoda 5 Chome
Saitama-Ken
Japan, 350-0214
Phone: +81 492 83 7575
Brands: Airpax™



Important Notice: Sensata Technologies (Sensata) reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Sensata advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current. Sensata assumes no responsibility for infringement of patents or rights of others based on Sensata applications assistance or product specifications since Sensata does not possess full access concerning the use or application of customers' products. Sensata also assumes no responsibility for customers' product designs.

<http://airpax.sensata.com/>