



# KAC 600V 1-1000A

For new installations, Bussmann recommends the 700 volt FWP series fuse. The 600V fuses are supplied as replacements only.

Type	Ordering Information			Dimensions		
	Part Number			Carton Qty.	Carton Weight (lbs)	Figure Number
KAC 600V	KAC-1	KAC-7	KAC-17.5	10	0.50	Fig. 1
	KAC-2	KAC-8	KAC-20			
	KAC-3	KAC-9	KAC-25			
	KAC-4	KAC-10	KAC-30			
	KAC-5	KAC-12				
	KAC-6	KAC-15				
	KAC-35	KAC-45	KAC-60	5	1.56	Fig. 2
	KAC-40	KAC-50				
	KAC-70	KAC-90		1	0.78	Fig. 1
	KAC-80	KAC-100				
KAC-110	KAC-150	KAC-200				
KAC-125	KAC-175					
KAC-225	KAC-300	KAC-400	1	1.92	Fig. 1	
KAC-250	KAC-350					
KAC-450	KAC-600	KAC-800	1	3.16	Fig. 1	
KAC-500	KAC-700					
KAC-1000			1	6.24		

†U.L. Recognition on 1 through 600 amperes only. 1 kg = 2.2 lbs 1 lb = 0.45 kg  
 ■ Interrupting rating 200kA RMS Symmetrical.  
 ■ Consult Bussmann for DC ratings.

## Dimensions

Fig. 1: 1-30 & 450-1000 Amp Range


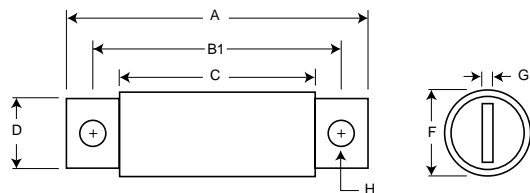


Fig. 2: 35-400 Amp Range

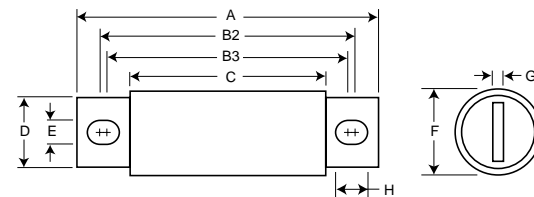

Order #	Fig.	A	B1	B2	B3	C	D	E	F	G	H
KAC-1-30	1	2.875	2.500	—	—	1.875	0.406	—	0.563	0.063	0.257
KAC-35-60	2	4.375	—	3.750	3.500	2.750	0.625	0.343	0.813	0.094	0.468
KAC-70-100	2	5.000	—	4.063	3.656	2.750	0.750	0.406	1.000	0.125	0.609
KAC-110-200	2	5.140	—	4.390	3.766	2.906	1.000	0.406	1.500	0.188	0.718
KAC-225-400	2	6.182	—	4.815	4.565	3.000	1.625	0.562	2.000	0.250	0.687
KAC-450-800	1	6.250	4.750	—	—	3.063	2.000	—	2.500	0.250	0.563
KAC-1000	1	7.250	4.750	—	—	3.063	2.750	—	3.500	0.375	0.563

Dimension in inches.  
 1mm = 0.0394" 1" = 25.4mm

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.