



# SAW Components

Data Sheet B3825




**Data Sheet**
**Ceramic package QCC12C**
**Features**

- IF low-loss filter for base stations
- Channel selection in W-CDMA systems
- Balanced and unbalanced operation possible
- 3,84 MHz usable bandwidth
- Ceramic SMD package

**Terminals**


- Gold plated

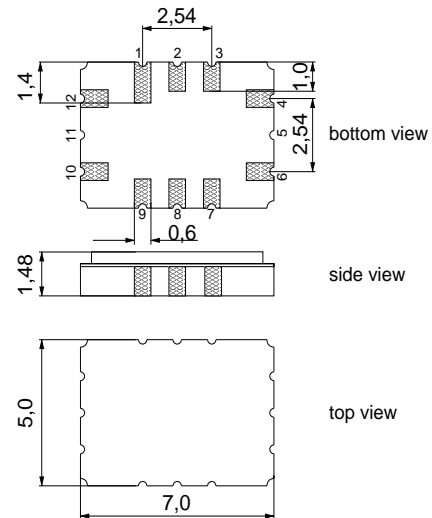

Dim. in mm, aprox. weight 0,22 g

**Pin configuration**

|            |                                  |
|------------|----------------------------------|
| 12         | Input                            |
| 10         | Input ground or balanced input   |
| 6          | Output                           |
| 4          | Output ground or balanced output |
| 1, 2, 7, 8 | to be grounded                   |
| 3, 9       | Case - ground                    |

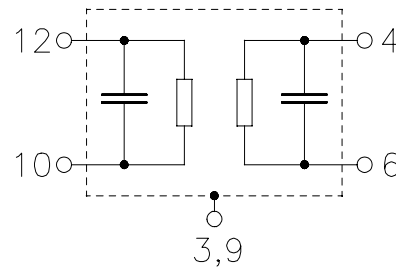

| Type  | Ordering code     | Marking and Package according to | Packing according to |
|-------|-------------------|----------------------------------|----------------------|
| B3825 | B39381-B3825-H310 | C61157-A7-A95                    | F61074-V8170-Z000    |

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

|                            |           |           |     |  |
|----------------------------|-----------|-----------|-----|--|
| Operable temperature range | $T$       | - 40/+ 85 | °C  |  |
| Storage temperature range  | $T_{stg}$ | - 40/+ 85 | °C  |  |
| DC voltage                 | $V_{DC}$  | 0         | V   |  |
| Source power               | $P_s$     | 10        | dBm |  |



**SAW Components**

**B3825**

**Low-Loss Filter**

**380,00 MHz**

**Data Sheet**

**Characteristics (unbalanced operation)**

Operating temperature:  $T = -25 \text{ to } +85 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 577 \text{ } \Omega \parallel 20 \text{ nH}$   
 Terminating load impedance:  $Z_L = 817 \text{ } \Omega \parallel 21 \text{ nH}$

|   |   | <b>min.</b> | <b>typ.</b> | <b>max.</b> |          |
|---|---|-------------|-------------|-------------|----------|
| <b>Nominal frequency</b>  | $f_N$   | —           | 380,0       | —           | MHz      |
| <b>Minimum insertion attenuation</b><br>(including matching network <sup>1)</sup> ) | $\alpha_{\min}$   | 8,0         | 8,9         | 10,0        | dB       |
| <b>Passband width</b>   | $B_{3,0\text{dB}}$  |             |             |             |          |
|   | $\alpha_{\text{rel}} \leq 3,0 \text{ dB}$                                       | 4,9         | 5,1         | 5,3         | MHz      |
| <b>Amplitude ripple (p-p)</b>   | $\Delta\alpha$  |             |             |             |          |
|   | $f_N \pm 1,92 \text{ MHz}$  | 0,2         | 1,0         | 1,2         | dB       |
| <b>Phase ripple (p-p)</b>   | $\Delta\phi$  |             |             |             |          |
|   | $f_N \pm 1,92 \text{ MHz}$  | 3,0         | 5,0         | 7,0         | $^\circ$ |
| <b>Absolute group delay</b>   | $\tau$  |             |             |             |          |
|   | @ $f_N$   | 360         | 460         | 560         | ns       |
| <b>Group delay ripple (p-p)</b>   | $\Delta\tau$  |             |             |             |          |
|   | $f_N \pm 1,92 \text{ MHz}$  | 40          | 80          | 180         | ns       |
| <b>Mean value of absolute group delay</b>   | $\bar{\tau}$  |             |             |             |          |
|   | $f_N \pm 1,92 \text{ MHz}$  | 440         | 460         | 480         | ns       |
| <b>Adjacent channel selectivity</b>   | $ACS$   | 24          | 32          | 39          | dB       |
| <b>Intermodulation</b>  | $IM3$   |             |             |             |          |
|   | f1 = 360 MHz, input power 0 dBm<br>f2 = 370 MHz, input power 0 dBm<br>@ $f_N$   | -120        | -95         | -85         | dBm      |
|   | f1 = 360 MHz, input power -5 dBm<br>f2 = 370 MHz, input power -5 dBm<br>@ $f_N$ | -135        | -110        | -100        | dBm      |



**SAW Components**

**B3825**

**Low-Loss Filter**

**380,00 MHz**

**Data Sheet**

|  |                 | min. | typ.     | max. |                    |
|--|-----------------|------|----------|------|--------------------|
| f1 = 390 MHz, input power 0 dBm<br>f2 = 400 MHz, input power 0 dBm<br>@ f <sub>N</sub>   |                 | -120 | -95      | -85  | dBm                |
| f1 = 390 MHz, input power -5 dBm<br>f2 = 400 MHz, input power -5 dBm<br>@ f <sub>N</sub> |                 | -135 | -110     | -100 | dBm                |
| <b>Minimum relative attenuation</b> (relative to α <sub>min</sub> ) α <sub>rel</sub>     |                 |      |          |      |                    |
| at f <sub>N</sub> - 5,0 MHz  |                 | 37   | 40       | 50   | dB                 |
| at f <sub>N</sub> + 5,0 MHz  |                 | 40   | 45       | 50   | dB                 |
| DC ... f <sub>N</sub> - 20,0 MHz   |                 | 42   | 46       | 55   | dB                 |
| f <sub>N</sub> - 20,0 MHz ... f <sub>N</sub> - 17,5 MHz                                  |                 | 35   | 38       | 45   | dB                 |
| f <sub>N</sub> - 17,5 MHz ... f <sub>N</sub> - 13,5 MHz                                  |                 | 42   | 45       | 55   | dB                 |
| f <sub>N</sub> - 13,5 MHz ... f <sub>N</sub> - 7,5 MHz                                   |                 | 38   | 40       | 45   | dB                 |
| f <sub>N</sub> - 7,5 MHz ... f <sub>N</sub> - 4,1 MHz                                    |                 | 35   | 38       | 45   | dB                 |
| f <sub>N</sub> - 4,1 MHz ... f <sub>N</sub> - 3,2 MHz                                    |                 | 20   | 22       | 40   | dB                 |
| f <sub>N</sub> + 3,2 MHz ... f <sub>N</sub> + 4,1 MHz                                    |                 | 20   | 23       | 40   | dB                 |
| f <sub>N</sub> + 4,1 MHz ... f <sub>N</sub> + 5,0 MHz                                    |                 | 34   | 37       | 45   | dB                 |
| f <sub>N</sub> + 5,0 MHz ... f <sub>N</sub> + 8,0 MHz                                    |                 | 37   | 39       | 45   | dB                 |
| f <sub>N</sub> + 8,0 MHz ... f <sub>N</sub> + 10,5 MHz                                   |                 | 32   | 35       | 45   | dB                 |
| f <sub>N</sub> + 10,5 MHz ... f <sub>N</sub> + 17,5 MHz                                  |                 | 39   | 42       | 50   | dB                 |
| f <sub>N</sub> + 17,5 MHz ... f <sub>N</sub> + 20,0 MHz                                  |                 | 35   | 38       | 45   | dB                 |
| f <sub>N</sub> + 20,0 MHz ... f <sub>N</sub> + 100,0 MHz                                 |                 | 40   | 43       | 55   | dB                 |
| <b>Impedance</b> at f <sub>N</sub> (without matching)                                    |                 |      |          |      |                    |
| Input: Z <sub>IN</sub> = R <sub>IN</sub>    C <sub>IN</sub>                              |                 | —    | 795    6 | —    | Ω    pF            |
| Output: Z <sub>OUT</sub> = R <sub>OUT</sub>    C <sub>OUT</sub>                          |                 | —    | 652    6 | —    | Ω    pF            |
| <b>Temperature coefficient of frequency</b> <sup>2)</sup>                                | TC <sub>f</sub> | —    | -0,036   | —    | ppm/K <sup>2</sup> |
| <b>Turnover temperature</b>  | T <sub>0</sub>  | —    | 25       | —    | °C                 |


1) Matching inductor Q=40

2) Temperature dependance of f<sub>c</sub>: f<sub>c</sub>(T<sub>A</sub>) = f<sub>c</sub>(T<sub>0</sub>)(1 + TC<sub>f</sub>(T<sub>A</sub> - T<sub>0</sub>)<sup>2</sup>)

## Data Sheet

**Matching network**

(Element values depend upon PCB layout)

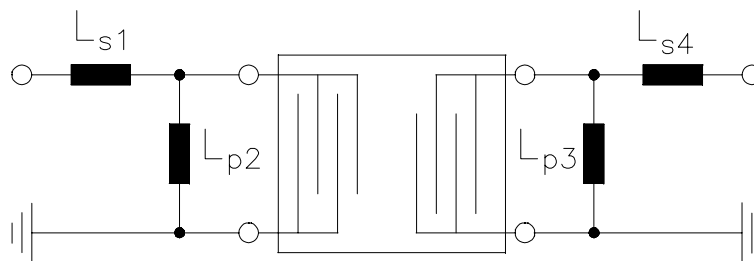

$$L_{s1} = 68 \text{ nH}$$


$$L_{p2} = 27 \text{ nH}$$

$$L_{p3} = 27 \text{ nH}$$


$$L_{s4} = 82 \text{ nH}$$

Data Sheet

Normalized frequency response

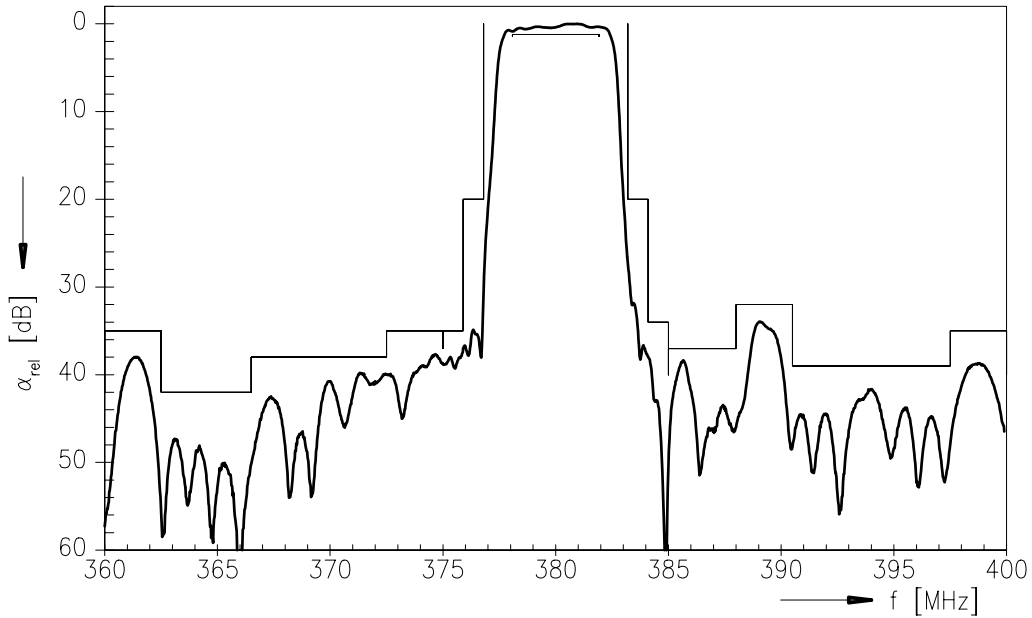

Normalized frequency response (pass band)

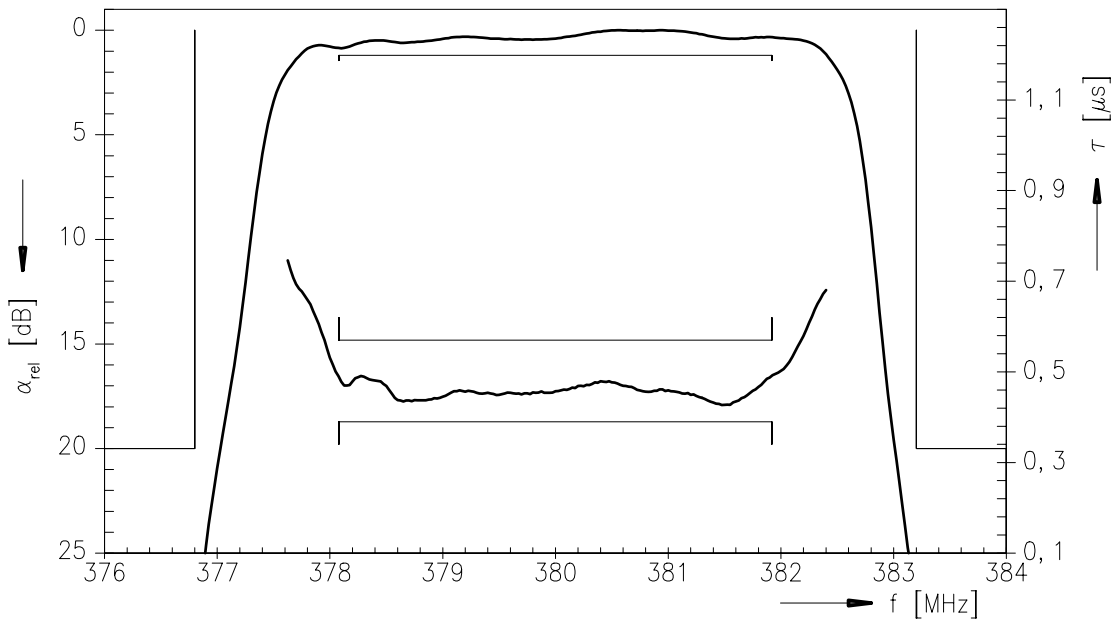



**SAW Components**

**B3825**

**Low-Loss Filter**

**380,00 MHz**

Data Sheet

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC PD**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.