


# Antennas/Duplexers

## SAW Duplexers

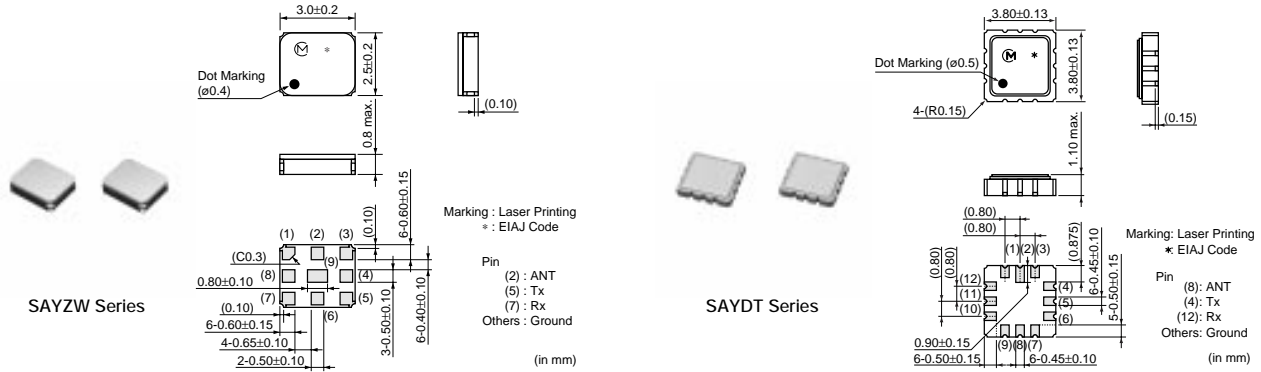

Part Number	Center Frequency (Tx->ANT) (MHz)	Insertion Loss (Tx->ANT) (dB)	Attenuation (Tx->ANT)	Center Frequency (ANT->Rx) (MHz)	Insertion Loss (ANT->Rx) (dB)	Attenuation (ANT->Rx)	Insertion Loss (Tx->Rx) (dB)
<b>SAYZW836MAA0F00</b>	836.5	2.1 max. (824MHz-849MHz)	19dBmin. (1648MHz-1698MHz)	881.5	3.2 max. (869MHz-894MHz)	35dBmin. (930MHz-1200MHz)	54 min. (824MHz-849MHz)
<b>SAYZW836MAF0F00</b>	836.5	2.1 max. (824MHz-849MHz)	13dBmin. (1648MHz-1698MHz)	881.5	3.2 max. (869MHz-894MHz)	35dBmin. (930MHz-1200MHz)	54 min. (824MHz-849MHz)
<b>SAYZX1G76AA0F00</b>	1767.45	1.75 max. (1749.9MHz-1785MHz)	37dBmin. (1844.9MHz-1880MHz)	1862.45	2.1 max. (1849.9MHz-1880MHz)	47dBmin. (1749.9MHz-1785MHz)	51 min. (1749.9MHz-1785MHz)
<b>SAYDJ856MAB0F00</b>	911.5	2.1 max. (898MHz-925MHz)	38dBmin. (860MHz-870MHz)	856.5	2.8 max. (843MHz-870MHz)	44dBmin. (915MHz-925MHz)	40 min. (843MHz-870MHz)
<b>SAYDT1G95AA0B00</b>	1950	1.5 max. (1920MHz-1980MHz)	10dBmin. (3840MHz-3960MHz)	2140	2.2 max. (2110MHz-2170MHz)	46dBmin. (1920MHz-1980MHz)	52 min. (1920MHz-1980MHz)
<b>SAYHP1G88ED0F00</b>	1880	3.5 max. (1850.6MHz-1909.4MHz)	2dBmin. (3700MHz-3820MHz)	1960	4.2 max. (1930.6MHz-1989.4MHz)	25dBmin. (3860MHz-3980MHz)	55 min. (1850.6MHz-1909.4MHz)

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.