



# SAW filters for mobile communications

## Series/Type: B4141

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39941B4141U510		2009-04-30	2009-10-31	2010-01-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).



**SAW Components**

**B4141**

**Low-Loss Filter for Mobile Communication**

**942,50 MHz**

**Data Sheet**




Ceramic package DCC6D

**Features**

- Low-loss RF filter for mobile telephone EGSM systems, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced Operation
- Impedance transformation from 50 Ω to 200 Ω
- Ceramic package for **Surface Mounted Technology (SMT)**

**Terminals**


- Ni, gold-plated

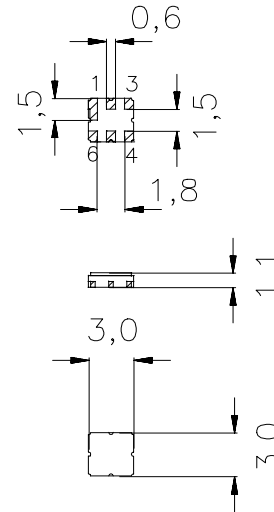

Dimensions in mm, approx. weight 0,037 g

**Pin configuration**

- 2 Input, unbalanced
- 1, 3 Input ground
- 4, 6 Output, balanced
- 5 To be grounded
- 1, 3, 5 Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B4141	B39941-B4141-U510	C61157-A7-A68	F61074-V8089-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 10 / + 80	°C	source impedance 50 Ω , load impedance 200 Ω , peak power of GSM signal, duty cycle 2 : 8
Storage temperature range	$T_{stg}$	- 40 / + 85	°C	
DC voltage	$V_{DC}$	0	V	
Input power max. 880 ... 915 MHz	$P_{IN}$	3,5	dBm	



SAW Components

B4141

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



**Characteristics**

Operating temperature range:  $T = 25 \pm 2 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ } \Omega$   
 Terminating load impedance:  $Z_L = 200 \text{ } \Omega \parallel 47\text{nH}$   
 ( L simulated with Q factor 20 )

			min.	typ.	max.	
<b>Center frequency</b>	$f_C$		—	942,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	925,0 ... 960,0 MHz	—	2,5	3,2	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	925,0 ... 960,0 MHz	—	0,9	1,4	dB
<b>Input VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,3	
<b>Output VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,1	
<b>Attenuation</b>	$\alpha$					
		0,0 ... 600,0 MHz	60	78	—	dB
		600,0 ... 880,0 MHz	50	66	—	dB
		880,0 ... 905,0 MHz	30	47	—	dB
		905,0 ... 915,0 MHz	20	28	—	dB
		980,0 ... 1025,0 MHz	22	25	—	dB
		1025,0 ... 1050,0 MHz	35	45	—	dB
		1050,0 ... 1920,0 MHz	50	70	—	dB
		1920,0 ... 2880,0 MHz	30	60	—	dB
		2880,0 ... 3840,0 MHz	23	49	—	dB
		3840,0 ... 5000,0 MHz	18	36	—	dB
		5000,0 ... 6000,0 MHz	10	35	—	dB
<b>Symmetry in band</b> (referenced to the matched operating condition)						
	$ S_{31} / S_{21} $	925,0 ... 960,0 MHz	-1,0	0	1,0	dB
	$\arg(S_{31}/S_{21})$	925,0 ... 960,0 MHz	170	180	190	$^\circ$



SAW Components

B4141

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



**Characteristics**

Operating temperature range:  $T = +20$  to  $+40$  °C  
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 200 \Omega \parallel 47$  nH  
 ( L simulated with Q factor 20 )

			min.	typ.	max.	
<b>Center frequency</b>	$f_C$		—	942,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	925,0 ... 960,0 MHz	—	2,6	3,4	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	925,0 ... 960,0 MHz	—	1,0	1,6	dB
<b>Input VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,3	
<b>Output VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,1	
<b>Attenuation</b>	$\alpha$					
		0,0 ... 600,0 MHz	60	78	—	dB
		600,0 ... 880,0 MHz	50	66	—	dB
		880,0 ... 905,0 MHz	30	44	—	dB
		905,0 ... 915,0 MHz	20	28	—	dB
		980,0 ... 1025,0 MHz	22	25	—	dB
		1025,0 ... 1050,0 MHz	35	45	—	dB
		1050,0 ... 1920,0 MHz	50	70	—	dB
		1920,0 ... 2880,0 MHz	30	60	—	dB
		2880,0 ... 3840,0 MHz	23	48	—	dB
		3840,0 ... 5000,0 MHz	18	36	—	dB
		5000,0 ... 6000,0 MHz	10	35	—	dB
<b>Symmetry in band</b> (referenced to the matched operating condition)						
	$ S_{31} / S_{21} $	925,0 ... 960,0 MHz	-1,0	0	1,0	dB
	$\arg(S_{31}/S_{21})$	925,0 ... 960,0 MHz	170	180	190	°



SAW Components

B4141

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



**Characteristics**

Operating temperature range:  $T = +10$  to  $+60$  °C  
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 200 \Omega \parallel 47$  nH  
 ( L simulated with Q factor 20 )

			min.	typ.	max.	
<b>Center frequency</b>	$f_C$		—	942,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	925,0 ... 960,0 MHz	—	2,6	3,6	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	925,0 ... 960,0 MHz	—	1,0	1,8	dB
<b>Input VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,3	
<b>Output VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,1	
<b>Attenuation</b>	$\alpha$					
		0,0 ... 600,0 MHz	60	78	—	dB
		600,0 ... 880,0 MHz	50	66	—	dB
		880,0 ... 905,0 MHz	30	43	—	dB
		905,0 ... 915,0 MHz	20	28	—	dB
		980,0 ... 1025,0 MHz	21	25	—	dB
		1025,0 ... 1050,0 MHz	35	44	—	dB
		1050,0 ... 1920,0 MHz	50	70	—	dB
		1920,0 ... 2880,0 MHz	30	60	—	dB
		2880,0 ... 3840,0 MHz	23	49	—	dB
		3840,0 ... 5000,0 MHz	18	36	—	dB
		5000,0 ... 6000,0 MHz	10	35	—	dB
<b>Symmetry in band</b>						
(referenced to the matched operating condition)						
	$ S_{31} / S_{21} $	925,0 ... 960,0 MHz	-1,0	0	1,0	dB
	$\arg(S_{31}/S_{21})$	925,0 ... 960,0 MHz	170	180	190	°



SAW Components

B4141

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



**Characteristics**

Operating temperature range:  $T = -10$  to  $+80$  °C  
 Terminating source impedance:  $Z_S = 50 \Omega$   
 Terminating load impedance:  $Z_L = 200 \Omega \parallel 47$  nH  
 ( L simulated with Q factor 20 )

			min.	typ.	max.	
<b>Center frequency</b>	$f_C$		—	942,5	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{max}$	925,0 ... 960,0 MHz	—	2,7	3,8	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	925,0 ... 960,0 MHz	—	1,1	2,0	dB
<b>Input VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,3	
<b>Output VSWR</b>		925,0 ... 960,0 MHz	—	1,8	2,1	
<b>Attenuation</b>	$\alpha$					
		0,0 ... 600,0 MHz	60	78	—	dB
		600,0 ... 880,0 MHz	50	66	—	dB
		880,0 ... 905,0 MHz	30	40	—	dB
		905,0 ... 915,0 MHz	20	28	—	dB
		980,0 ... 1025,0 MHz	20	23	—	dB
		1025,0 ... 1050,0 MHz	35	44	—	dB
		1050,0 ... 1920,0 MHz	50	70	—	dB
		1920,0 ... 2880,0 MHz	30	60	—	dB
		2880,0 ... 3840,0 MHz	23	49	—	dB
		3840,0 ... 5000,0 MHz	18	36	—	dB
		5000,0 ... 6000,0 MHz	10	35	—	dB
<b>Symmetry in band</b> (referenced to the matched operating condition)						
	$ S_{31} / S_{21} $	925,0 ... 960,0 MHz	-1,0	0	1,0	dB
	$\arg(S_{31}/S_{21})$	925,0 ... 960,0 MHz	170	180	190	°



SAW Components

B4141


Low-Loss Filter for Mobile Communication

942,50 MHz


Data Sheet



Transfer function ( spec at 25 °C )

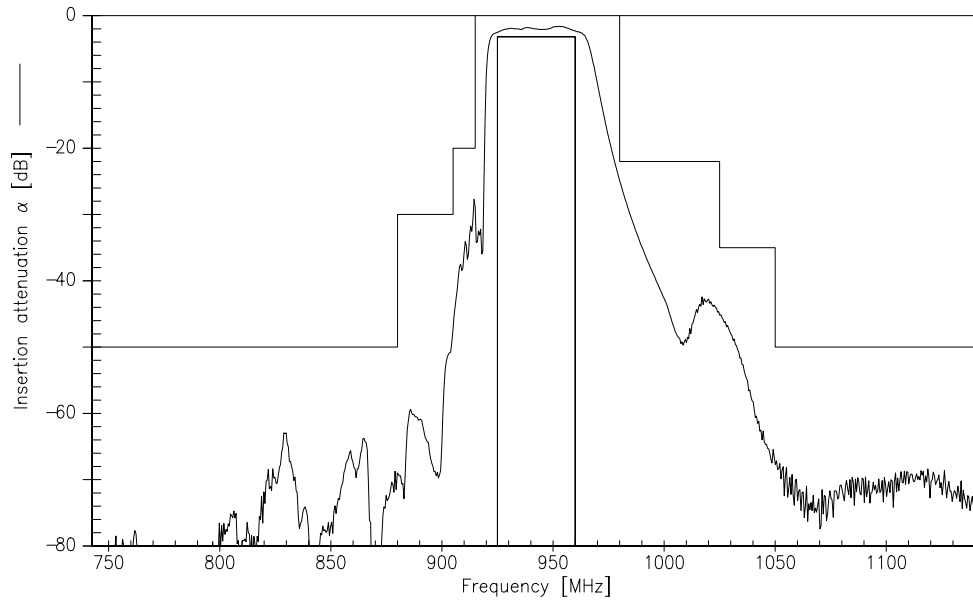

Transfer function ( wideband )

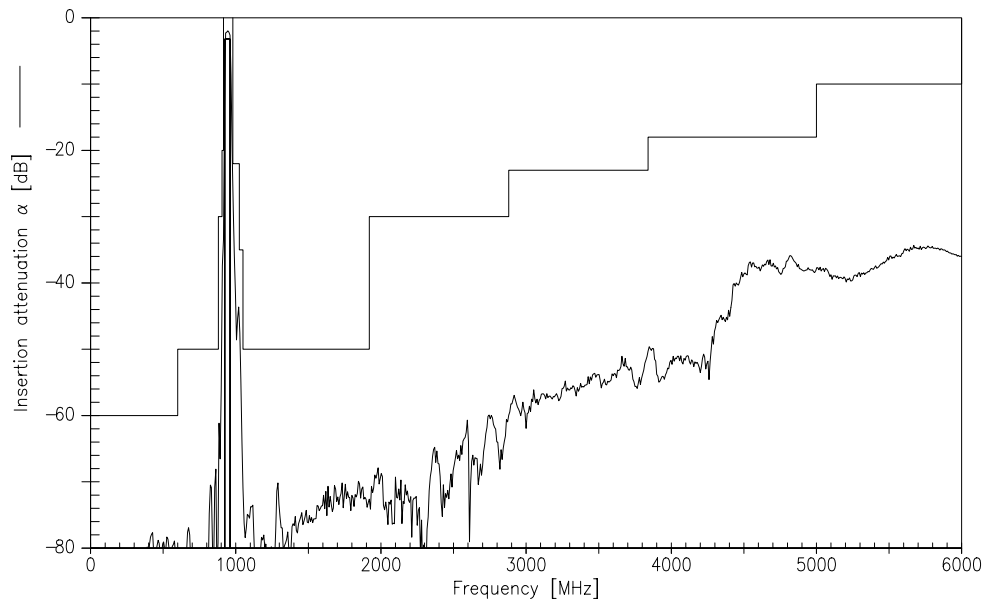





Data Sheet



Amplitude Symmetry  $|S_{31}|/|S_{21}|$  (referenced to the matched operating condition)

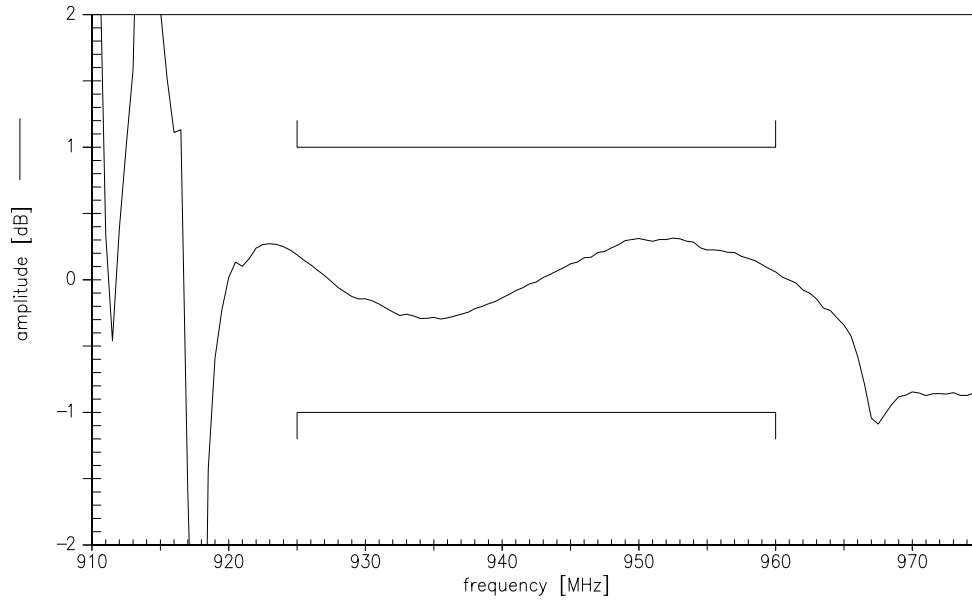

Phase Symmetry  $\arg(S_{31}/S_{21}) - 180^\circ$  (referenced to the matched operating condition)

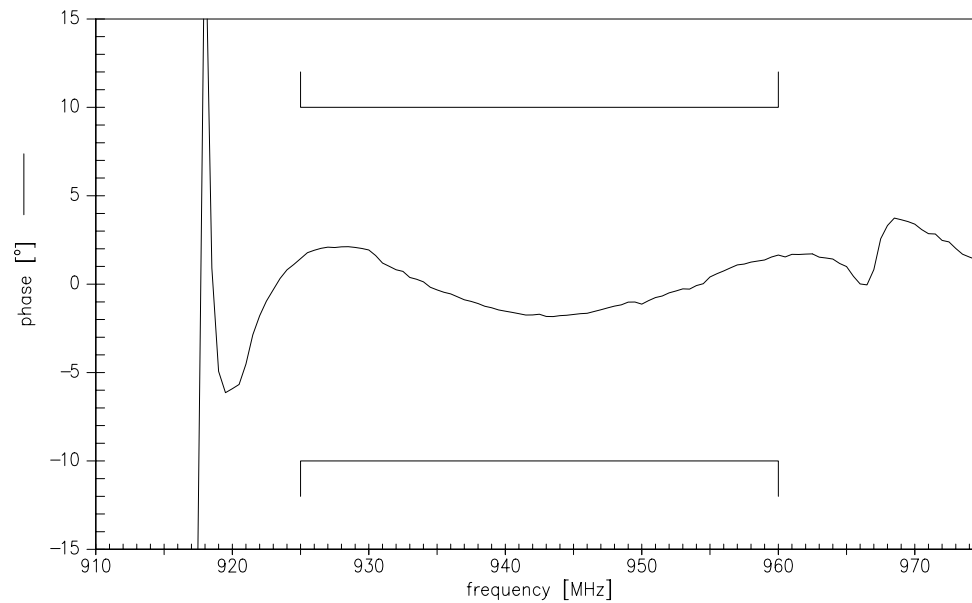





**SAW Components**

**B4141**

**Low-Loss Filter for Mobile Communication**

**942,50 MHz**

Data Sheet



**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, OFW E MF**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.