

Version 5.0

Discrete and standard
IC product guide

Discrete and standard IC product guide

Discrete semiconductors

As an expert in the management of power, Zetex Semiconductors provides product designers with a broad range of discrete semiconductor components that are renowned for their quality, high performance and optimized packaging.

With its leading edge bipolar technology, Zetex has long set the benchmark for bipolar transistor performance with very low saturation voltages and high power density components.

Concise product data for the complete range of bipolar transistors, diodes and MOSFETs is presented in this selection guide.


Standard ICs

The best power management ICs provide circuit designers with the most advantageous combination of efficiency, functionality and package size.

Zetex Semiconductors is able to offer a portfolio of devices that meet the requirements of a wide range of electronic applications by addressing these competing design criteria to produce elegant and practical solutions,

As an expert in power management, Zetex works closely with customers and partners to define the precise needs of a particular application and to identify the most appropriate integrated solution.

With its knowledge and technology leadership, Zetex has created the range of innovative and competitive power management ICs presented here.

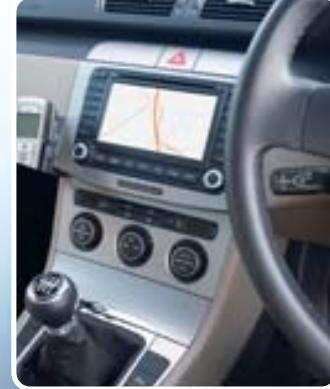

**Quality assurance,
environmental and RoHS
compliance**

Emphasizing its ongoing commitment to product quality, Zetex enjoys corporate status as an ISO/TS 16949:2002 certified company - the industry's most comprehensive quality management standard for companies operating in the global automotive procurement chain.

This award enhances the company's worldwide operation as a recognized ISO 9001:2000 supplier and is complemented by Zetex gaining ISO14001 certification in March 2006.

ISO14001 is the standard that forms the cornerstone of today's emerging environmental practices for responsible industrial management.

Certification to all of these management systems underlines Zetex' determination to harmonize products and processes to satisfy international quality, environmental standards and customer requirements, while seeking to minimize any adverse environmental impact.

The restriction on the use of certain hazardous substances (RoHS) legislation currently poses designers and manufacturers with yet another hurdle in bringing products to market.

As an active supporter of environmentally friendly practices, Zetex began conversion of its portfolio to RoHS compliance early in 2003.

All Zetex products are now available in a RoHS compliant format, without any changes to performance or specification.

For more information, visit www.zetex.com/leadfree



Contents

1.0 Bipolar transistors

Bipolar transistors up to 500V	8	Dual NPN and PNP transistors	30
NPN Avalanche transistors	28	Transistor and Schottky diode combinations	31
NPN & PNP Darlington transistors	28	Gate Drive transistors	32
H-bridges	29	Article	34
NPN/PNP combinations	29		

2.0 Diodes

Schottky Diodes	38	Power diodes	40
Varactor (tuner) diodes	39		

3.0 MOSFETs

20V devices	42	80V to 100V devices	48
30V to 50V devices	43	150V to 450V devices	49
60V to 70V devices	45		

4.0 Current monitors

Current output current monitors	54
Voltage output current monitors	56

5.0 Voltage references

Shunt regulators	59	Industry standard references	61
Micro-power voltage regulators	60		

6.0 Linear regulators

Miniature linear regulators	64
Industry standard improved regulators	65

Ultra-low dropout regulators	66
Micro-power low dropout regulators	67

7.0 DC-DC boost converters

Low power DC-DC boost converters	69
Single and multi-cell system power boost controllers	70

Transistors and Schottky diode combinations	71
---	----

8.0 Special functions

Supply voltage monitors (uP generators)	73
Siren Driver	74

Temperature sensor	74
Magneto-resistive sensors	75

9.0 Package information

Package information	76
Thermal data	82

10.0 Alphanumeric index

Bipolar transistors


Section 1.0

Today's portable devices demand power switches that can operate efficiently within limited power supply headroom. The combination of low saturation voltages, high gain, and low voltage drive characteristics that bipolars offer makes them the natural choice for operation at the 5V level and below. Add their ruggedness and low thermal resistance within minimal footprints and it's easy to see why bipolars can also outperform MOSFETs in higher voltage applications that range from automotive power converters to telecomms interfaces.

Zetex Semiconductors offers a portfolio of bipolar products that builds on successive generations of process know-how, leading edge design and innovation to manage voltages up to 500V with maximum efficiency. Its latest range of products extends the company's leadership in building ultra-low saturation voltage bipolar transistors that permit ever smaller surface mount packages to control continuous currents of several amps. Crucially, the specific die-area resistance of these bipolar transistors is significantly less than that of competing MOSFETs, and is especially suited to operation within cost sensitive, power-conscious, and space-constrained portable applications. For a more in-depth comparison of bipolar and MOSFET technology read the article at the back of the Discrete Component section of this brochure.

Multichip devices that combine transistors and Schottky diodes within leadless QFN packages are also available from Zetex to conserve valuable space in high-density assemblies. These devices especially suit charger circuits, DC-DC converters, MOSFET gate drivers, and motor control applications in mobile and portable equipment.

High voltage applications such as backlight inverters, motor drivers, and subscriber-line interface cards also benefit from bipolar transistor technology. Here too the bipolar's low saturation voltage challenges MOSFETs in low to medium current applications, and the availability of surface mount packages that dissipate up to 3W in SOT223 outline further promotes overall design efficiency.

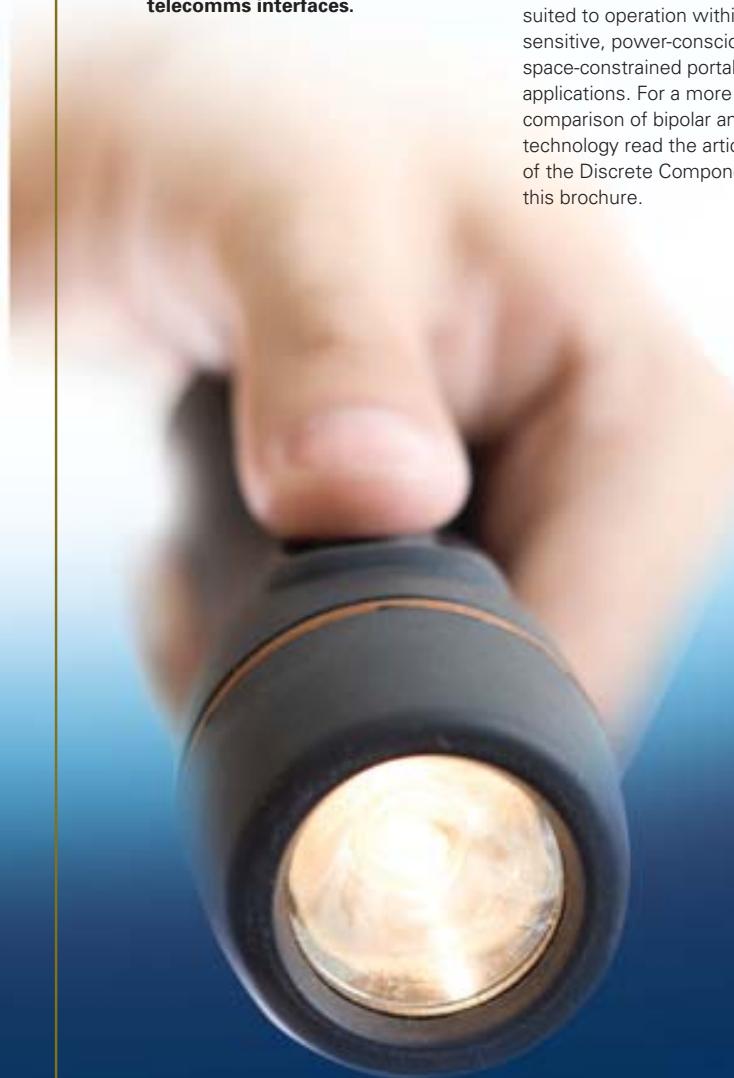

Contents

Devices up to 25V	
NPN transistors	10-12
PNP transistors	13-15
Devices from 30 to 50V	
NPN transistors	16-17
PNP transistors	18-19
Devices from 55 to 100V	
NPN transistors	20-21
PNP transistors	22-23
Devices from 120 to 220V	
NPN transistors	24
PNP transistors	25
Devices from 300 to 500V	
NPN transistors	26
PNP transistors	27
NPN avalanche transistors	28
NPN Darlington transistors	28
PNP Darlington transistors	28
H-bridges	29
NPN/PNP combinations	29
Dual NPN transistors	30
Dual PNP transistors	30
Transistor and Schottky diode combinations	31
Gate drive transistors	32
Article: Applications dictate bipolar or MOSFET power switch choices	34




NPN transistors up to 25V

Part number	V _{CEO} V	I _c A	I _{CM} A	P _D W	h _{FE}			V _{CE(sat)}			f _T MHz	R _{CE(sat)} mΩ	Package
					Min.	Max.	@ I _c A	Max. mV	@ I _c A	@ I _B mA			
FZT1047A	10	5	20	2.5	300 200	1200 -	1 5	40 350	0.5 5	10 25	150	44	SOT223 (T1)
FCX1047A	10	4	20	1	300 200	1200 -	1 4	40 240	0.5 4	10 50	150	40	SOT89 (T1)
ZXTN25012EZ	12	6.5	15	2.4	500 185	1500 -	0.01 6.5	60 130	1 2	10 20	260	25	SOT89 (T1)
ZXTN25012EFH	12	6	15	1.25	500 300	1500 -	0.01 4	32 190	1 6	100 120	260	23	SOT23 (T1)
ZXTN07012EFF	12	4.5	10	1.5	500 330	1500 -	0.1 4.5	85 150	1 2	10 20	220	43	SOT23F (T1)
FZT688B	12	4	10	2	500 400	- -	0.1 3	40 400	0.1 4	1 50	150	83	SOT223 (T1)
FCX688B	12	3	10	1	500 400	- -	0.1 3	40 350	0.1 3	1 10	150	-	SOT89 (T1)
ZTX688B	12	3	10	1	500 400	- -	0.1 3	40 350	0.1 3	1 20	150	-	E-Line (T1)
ZXTN25012EFL	12	2	15	0.350	500 210	1500 -	0.01 5	85 130	1 2	10 40	280	46	SOT23 (T1)
ZXTN23015CFH	15	6	12	1.25	200 150	560 -	0.5 6	30 180	1 6	100 120	235	19	SOT23 (T1)
ZXT13N15DE6	15	5	15	1.1	300 200	900 -	1 5	70 200	1 5	10 100	72	29	SOT23-6 (T1)
ZXTN25015DFH	15	5	15	1.25	300 150	900 -	0.01 5	40 215	1 5	100 100	240	25	SOT23 (T1)
ZXTAM322	15	4.5	15	1.5	300 150	- -	0.2 5	14 280	0.1 4.5	10 50	120	45	DFN322 (T1)
ZXT10N15DE6	15	4	13	1.1	300 200	- -	0.2 3	14 260	0.1 4	10 50	120	50	SOT23-6 (T1)
FCX617	15	3	12	1	300 200	- -	0.2 3	14 300	0.1 4	10 50	120	50	SOT89 (T1)
FMMT617	15	3	12	0.625	300 200	- -	0.2 3	14 200	0.1 3	10 50	120	50	SOT23 (T1)
ZXT11N15DF	15	3	5	0.625	300 200	900 -	0.2 3	80 150	1 3	10 150	145	37	SOT23 (T1)
ZUMT617	15	1.5	5	0.385	300 200	- -	0.1 1	20 245	0.1 1.5	10 20	180	135	SOT323 (T1)
FZT1048A	17.5	5	20	2.5	300 180	1200 -	1 5	45 350	0.5 5	10 25	150	50	SOT223 (T1)
ZTX1048A	17.5	4	20	1	300 220	1200 -	1 4	45 245	0.5 4	10 20	150	-	E-Line (T1)
ZXTN19020CFF	20	7.0	20	1.5	200	500 -	0.1 7.0	65 70	1 2	10 40	150	18	SOT23F (T1)
ZXTN19020DG	20	9	20	3	300 130	900 -	0.1 9	70 100	1 2	10 20	160	20	SOT223 (T1)

NPN transistors up to 25V

Part number	V_{CEO} V	I_c A	I_{CM} A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
					Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
ZXTN19020DZ	20	7.5	20	2.4	300 150	900 -	0.1 7.5	70 100	1 2	10 20	160	21	SOT89 (T1)
ZXTN25020DG	20	7	15	3	300 50	900 -	0.01 7	48 180	1 2	100 20	215	31	SOT223 (T1)
ZXTN19020DFF	20	6.5	20	1.5	300 160	900 -	0.1 6.5	65 95	1 2	10 20	160	18	SOT23F (T1)
ZXTN25020DZ	20	6	15	2.4	300 50	900 -	0.01 6	48 180	1 2	100 20	215	30	SOT89 (T1)
ZXT13N20DE6	20	4.5	15	1.1	300 200	900 -	1 5	75 230	1 4.5	10 45	96	38	SOT23-6 (T1)
ZXTN25020DFH	20	4.5	15	1.25	300 120	900 -	0.01 4.5	43 265	1 4.5	100 90	215	28	SOT23 (T1)
ZXTBM322	20	4.5	12	1.5	300 100	-	0.2 6	15 270	0.1 4.5	10 125	140	47	DFN322 (T1)
ZXTN25020BFH	20	4.5	10	1.25	100 75	300 -	0.01 4.5	45 240	1 4.5	100 90	185	27	SOT23 (T1)
ZXTN25020CFH	20	4.5	10	1.25	200 90	500 -	0.01 4.5	45 220	1 4.5	100 90	185	28	SOT23 (T1)
ZXT10N20DE6	20	3.5	19	1.1	300 200	-	0.2 2	15 250	0.1 3.5	10 100	140	55	SOT23-6 (T1)
ZTX618	20	3.5	10	1	300 170	-	0.2 3	15 255	0.1 3.5	10 50	140	-	E-Line (T1)
FZT689B	20	3	8	2	500 400	-	0.1 2	100 450	0.1 3	0.5 20	150	92	SOT223 (T1)
ZTX689B	20	3	8	1	500 400	-	0.1 2	100 500	0.1 2	0.5 10	150	-	E-Line (T1)
ZXT11N20DF	20	2.5	5	0.625	300 150	900 -	0.1 3	100 130	1 2.5	10 250	160	40	SOT23 (T1)
FMMT618	20	2.5	6	0.625	300 200	-	0.2 2	15 200	0.1 2.5	10 50	140	50	SOT23 (T1)
ZXTN25020DFL	20	2	8	0.350	300 220	900 -	0.01 2	100 225	1 2	20 20	215	55	SOT23 (T1)
FMMTL618	20	1.25	4	0.5	300 200	-	0.2 1	35 280	0.1 1.25	10 100	195	140	SOT23 (T1)
ZUMT618	20	1.25	4	0.385	300 100	-	0.1 1	25 250	0.1 1.25	10 50	210	125	SOT323 (T1)


continued overleaf...

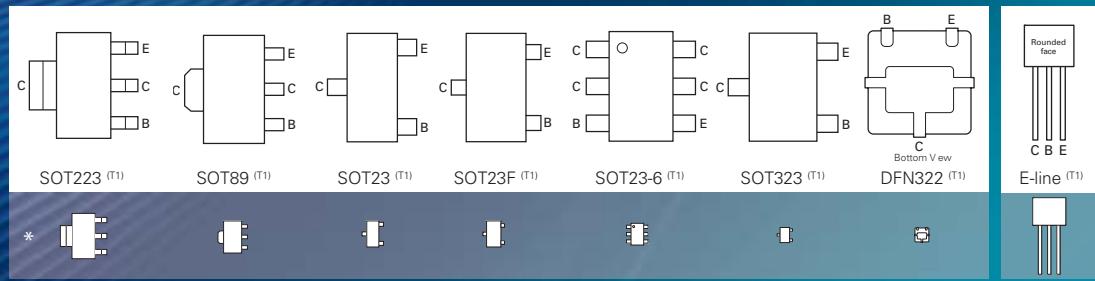

* Indicative relative size

NPN transistors up to 25V (continued)


Part number	V_{CEO} V	I_c A	I_{CM} A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
					Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
BCX6825	20	1	2	1	160	400	0.5	500	1	100	100	-	SOT89 (T1)
FZT869	25	7	20	3	300 200	- -	1 7	50 350	0.5 6.5	10 150	100	36	SOT223 (T1)
ZXTN2005G	25	7	20	3	300 200	- -	1 7	40 230	0.5 6.5	10 150	150	30	SOT223 (T1)
ZXTN2005Z	25	5.5	20	2.1	300 200	- -	1 7	45 200	1 6.5	100 150	150	25	SOT89 (T1)
FZT1049A	25	5	20	2.5	300 180	1200 -	1 5	60 330	0.5 5	10 50	180	-	SOT223 (T1)
ZTX869	25	5	20	1.2	300 250	- -	1 5	50 220	0.5 5	10 100	100	-	E-Line (T1)
ZTX1049A	25	4	20	1	300 200	1200 -	1 4	45 220	0.5 4	10 50	180	-	E-Line (T1)
FZT649	25	3	8	2	100 75	300 -	1 2	300 600	1 3	100 300	240	-	SOT223 (T1)
ZTX649	25	2	6	1	100 75	300 -	1 2	300 500	1 2	100 200	240	-	E-Line (T1)

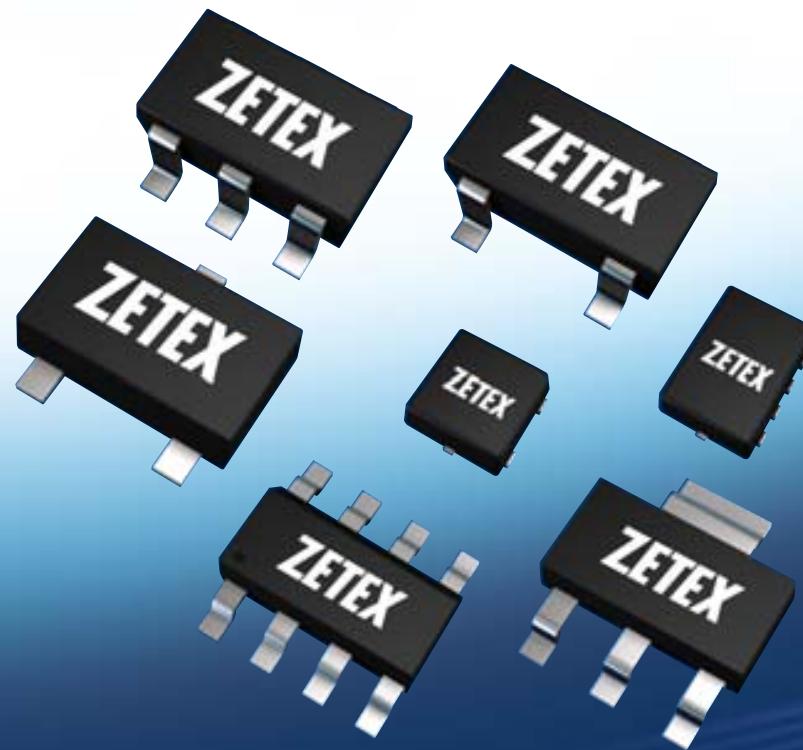

PNP transistors up to 25V

Part number	V_{CEO} V	I_c A	I_{CM} A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
					Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
FZT968	-12	-6	-20	3	300 200	1000 -	-0.5 -5	-130 -450	-0.5 -6	-5 -250	80	44	SOT223 (T1)
FZT1147A	-12	-5	-20	2.5	250 150	850 -	-0.5 -5	-110 -400	-0.5 -5	-2.5 -50	115	-	SOT223 (T1)
ZTX968	-12	-4.5	-20	1.2	300 200	1000 -	-0.5 -5	-100 -300	-0.5 -5	-5 -200	80	-	E-Line (T1)
ZXTP25012EZ	-12	-4.5	-10	2.4	500 40	1500 -	-0.01 -4.5	-265 -355	-1 -2	-10 -40	310	45	SOT89 (T1)
ZTX1147A	-12	-4	-20	1	250 170	850 -	-0.5 -4	-130 -235	-1 -4	-6 -70	115	-	E-Line (T1)
ZXT13P12DE6	-12	-4	-15	1.1	300 200	900 -	-1 -4	-90 -250	-1 -4	-10 -50	55	37	SOT23-6 (T1)
ZXT1M322	-12	-4	-12	1.5	300 60	-	-0.1 -8	-17 -300	-0.1 -4	-10 -150	110	60	DFN322 (T1)
ZXTP25012EFH	-12	-4	-10	1.25	500 300	1500 -	-0.01 -1	-260 -350	-1 -2	-10 -40	310	40	SOT23 (T1)
ZXTP07012EFF	-12	-4	-8	1.5	500 230	1500 -	-0.01 -4	-165 -350	-1 -2	-5 -10	250	50	SOT23F (T1)
FCX1147A	-12	-3	-20	1	250 200	850 -	-0.5 -3	-110 -250	-0.5 -3	-2.5 -30	115	53	SOT89 (T1)
FCX717	-12	-3	-10	1	300 160	-	-0.1 -3	-20 -320	-0.1 -3	-10 -50	110	77	SOT89 (T1)
FZT717	-12	-3	-10	2	300 160	-	-0.1 -3	-17 -320	-0.1 -3	-10 -50	110	-	SOT223 (T1)
ZXT10P12DE6	-12	-3	-10	1.1	300 180	-	-0.1 -2.5	-17 -300	-0.1 -3	-10 -50	110	65	SOT23-6 (T1)
FMMT717	-12	-2.5	-10	0.625	300 180	-	-0.1 -2.5	17 -220	-0.1 -2.5	-10 -50	110	72	SOT23 (T1)
FMMTL717	-12	-1.25	-4	0.5	300 180	-	-0.1 -1	-40 -290	-0.1 -1.25	-10 -50	205	160	SOT23 (T1)
ZUMT717	-12	-1.25	-3	0.385	300 125	-	-0.1 -1.25	-40 -240	-0.1 -1.25	-10 -100	220	150	SOT323 (T1)
ZXTP23015CFH	-15	-6	-10	1.25	200 140	560 -	-0.5 -6	-36 -190	-1 -6	-100 -240	270	20	SOT23 (T1)
ZXTP25015DFH	-15	-4	-10	1.25	300 90	900 -	-0.01 -4	-55 -210	-1 -4	-100 -200	295	33	SOT23 (T1)

continued overleaf...

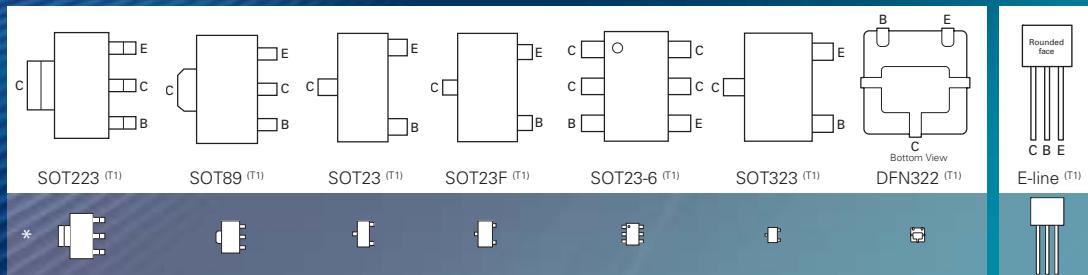


* Indicative relative size

PNP transistors up to 25V (continued)

Part number	V_{CEO} V	I_c A	I_{CM} A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
					Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
ZTX788A	-15	-3	-10	1	300 200	800 -	-0.01 2	-35 -330	-0.1 -3	-2 -200	150	-	E-Line (T1)
FZT788B	-15	-3	-8	2	400 300	-	-1 -2	-150 -500	-0.5 -3	-2.5 -50	100	93	SOT223 (T1)
ZTX788B	-15	-3	-8	1	400 300	-	-1 -2	-150 -450	-0.5 -2	-2.5 -10	100	-	E-Line (T1)
ZXTP19020DG	-20	-8	-15	3	300 45	900 -	-0.1 -8	-130 -145	-1 -2	-10 -40	176	28	SOT223 (T1)
FZT948	-20	-6	-20	3	100 75	300	-1 -5	-130 -450	-0.5 -6	-10 -250	80	-	SOT223 (T1)
ZXTP19020DZ	-20	-6	-15	2.4	300 65	900	-0.1 -6	-130 -145	-1 -2	-10 -40	176	28	SOT89 (T1)
ZXTP25020DG	-20	-6	-10	3	300 25	900	-0.01 -6	-65 -245	-1 -2	-100 -40	290	42	SOT223 (T1)
ZXTP19020DFF	-20	-5.5	-15	1.5	300 90	900	-0.1 -5	-125 -140	-1 -2	-10 -40	176	26	SOT23F (T1)
ZXTP19020CFF	-20	-5	-15	1.5	200 110	500	-0.1 -5	-70 -120	-1 -2	-20 -40	200	21	SOT23F (T1)
ZXTP25020DZ	-20	-5	-10	2.4	300 45	900	-0.01 -5	-65 -245	-1 -2	-100 -40	290	39	SOT89 (T1)
ZTX948	-20	-4.5	-20	1.2	100 75	300	-1 -5	-100 -250	-0.5 -4	-10 -400	80	-	E-Line (T1)
ZXTP25020CFF	-20	-4.5	-10	1.5	200 150	500	-0.01 -1	-110 -185	-1 -2	-20 -40	285	41	SOT23F (T1)
ZXTP25020BFH	-20	-4	-10	1.25	100 50	300	-0.01 -4	-60 -210	-1 -4	-100 -200	250	32	SOT23 (T1)
ZXTP25020CFH	-20	-4	-10	1.25	200 85	500	-0.01 -4	-55 -210	-1 -4	-100 -200	285	34	SOT23 (T1)
ZXTP25020DFH	-20	-4	-10	1.25	300 70	900	-0.01 -4	-60 -240	-1 -2	-100 -40	290	39	SOT23 (T1)
ZX5T2E6	-20	-3.5	-10	1.1	300 150	900	-1 -3.5	-140 -130	-1 -3.5	-10 -350	110	31	SOT23-6 (T1)
ZXT13P20DE6	-20	-3.5	-10	1.1	300 150	900	-1 -3.5	-130 -250	-1 -3.5	-10 -350	90	47	SOT23-6 (T1)
ZXTP2006E6	-20	-3.5	-10	1.1	300 -3.5	900	-1 -3.5	-140 -350	-1 -3.5	-10 -350	110	31	SOT23-6 (T1)
ZXT2M322	-20	-3.5	-6	1.5	300 150	-	-0.1 -2	-30 -300	-0.1 -3.5	-10 -350	180	64	DFN322 (T1)
FCX718	-20	-2.5	-6	1	300 150	-	-0.1 -2	-40 -300	-0.1 -2.5	-10 -200	180	96	SOT89 (T1)
ZTX718	-20	-2.5	-6	1	300 150	-	-0.1 -2	-40 -260	-0.1 -2.5	-10 -200	180	-	E-Line (T1)

PNP transistors up to 25V

Part number	V_{CEO} V	I_c A	I_{CM} A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
					Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
ZXT10P20DE6	-20	-2.5	-6	1.1	300 150	- -2	-0.1 -2	-30 -350	-0.1 -2.5	-10 -150	180	75	SOT23-6 (T1)
FMMT718	-20	-1.5	-6	0.625	300 150	- -2	-0.1 -2	-40 -220	-0.1 -1.5	-10 -50	180	97	SOT23 (T1)
ZXTP25020DFL	-20	-1.5	-6	0.350	300 60	900 -	-0.01 -4	-225 -275	-1 -2	-10 -40	290	54	SOT23 (T1)
ZUMT718	-20	-1	-3	0.385	300 100	- -1	-0.1 -250	-45 -1	-0.1 -1	-10 -100	210	200	SOT323 (T1)
BCX6925	-20	-1	-2	1	160	400	-0.5	-500	-1	-100	100	-	SOT89 (T1)
FMMTL718	-20	-1	-2	0.5	300 120	- -1	-0.1 -320	-50 -1	-0.1 -1	-10 -50	265	210	SOT23 (T1)
FZT1149A	-25	-4	-10	2.5	250 115	800	-0.5 -5	-240 -350	-1 -4	-7 -140	135	-	SOT223 (T1)
FCX1149A	-25	-3	-10	1	250 150	800	-0.5 -3	-240 -300	-1 -3	-7 -100	135	67	SOT89 (T1)
ZTX1149A	-25	-3	-10	1	250 115	800	-0.5 -5	-170 -300	-0.5 -3	-3 -70	135	-	E-Line (T1)
FCX789A	-25	-3	-8	1	230 180	- -2	-1 -320	-190 -3	-1 -100	-10 -100	100	-	SOT89 (T1)
FZT749	-25	-3	-8	2	100 75	300	-1 -2	-300 -600	-1 -3	-100 -300	160	-	SOT223 (T1)
ZTX789A	-25	-3	-8	1	250 200	- -2	-1 -500	-250 -3	-1 -100	-10 -100	100	-	E-Line (T1)
FZT789A	-25	-3	-6	2	250 200	- -2	-1 -500	-250 -3	-1 -100	-10 -100	100	93	SOT223 (T1)
ZTX749	-25	-2	-6	1	100 75	300	-1 -2	-300 -500	-1 -2	-100 -200	160	-	E-Line (T1)

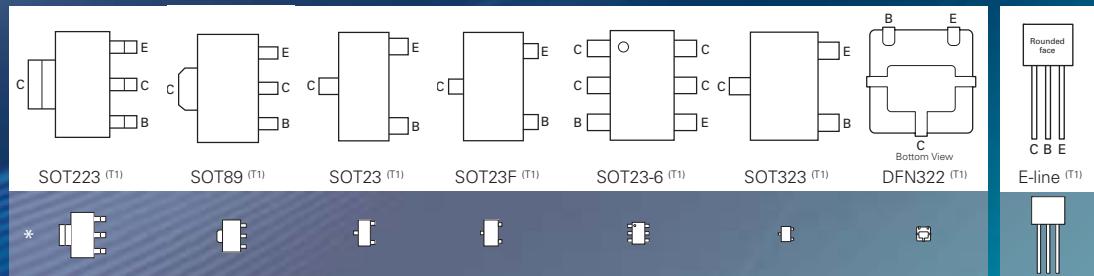


* Indicative relative size

NPN transistors from 30 to 50V

Part number	V _{CEO} V	I _C A	P _D W	h _{FE}			V _{CE(sat)}			f _T MHz	R _{CE(sat)} mΩ	Package
				Min.	Max.	@ I _C A	Max. mV	@ I _C A	@ I _B mA			
ZXT849K	30	7	4.2	100 100	300 -	1 7	80 280	1 7	20 350	100	33	DPAK (T1)
FZT849	30	7	3	100 100	300 -	1 7	110 350	1 6.5	20 300	100	36	SOT223 (T1)
ZXTN2007G	30	7	3	100 100	300 -	1 7	65 220	1 6.5	20 300	140	28	SOT223 (T1)
ZXTN2007Z	30	6	2.1	100 100	300 -	1 7	45 190	1 6.5	100 300	140	23	SOT89 (T1)
ZTX849	30	5	1.2	100 100	300 -	1 5	100 220	1 5	20 200	100	-	E-Line (T1)
FZT489	30	1	2	100 60	300 -	1 2	300 600	1 2	100 200	150	-	SOT223 (T1)
ZTX449	30	1	1	100 80	300 -	0.5 1	500 1000	1 2	100 200	150	-	E-Line (T1)
FMMT449	30	1	0.5	100 80	300 -	0.5 1	500 1000	1 2	100 200	150	250	SOT23 (T1)
FMMT489	30	1	0.5	100 60	300 -	1 2	300 600	1 2	100 200	150	175	SOT23 (T1)
FZT1051A	40	5	2.5	270 130	1200 -	1 5	120 340	1 5	10 100	155	50	SOT223 (T1)
ZXTN25040DZ	40	5	1.8	300 20	900 -	0.01 5	60 215	1 2	100 40	190	38	SOT89 (T1)
ZXTN25040DFH	40	4	1.25	300 30	900 -	0.01 4	55 190	1 4	100 400	190	35	SOT23 (T1)
ZTX1051A	40	4	1	300 190	1200 -	1 4	110 210	1 4	10 100	155	-	E-Line (T1)
FCX1051A	40	3	1	270 270	1200 -	1 3	120 250	1 3	10 40	155	57	SOT89 (T1)
ZXTN25040DFL	40	1.5	0.350	300 25	900 -	0.01 4	85 185	1 1.5	100 30	190	59	SOT23 (T1)
FZT491A	40	1	2	300 200	900 -	0.5 1	300 500	0.5 1	50 100	150	-	SOT223 (T1)
FCX491A	40	1	1	300 200	900 -	0.5 1	300 500	0.5 1	50 100	150	-	SOT89 (T1)
FMMT491A	40	1	0.5	300 200	900 -	0.5 1	300 500	0.5 1	50 100	150	195	SOT23 (T1)
ZXTN2040F	40	1	0.35	300 200	900 -	0.5 1	300 500	0.5 1	50 100	150	-	SOT23 (T1)
ZXTN07045EFF	45	6	1.5	500 250	1500 -	0.1 2	190 220	1 2	15 20	190	50	SOT23F (T1)
ZXT690BK	45	3	3.9	400 150	- -	1 2	85 360	0.1 1	0.5 5	150	77	DPAK (T1)
FZT690B	45	3	2	400 50	- -	1 3	100 500	0.1 1	0.5 5	150	125	SOT223 (T1)
FCX690B	45	2	1	400 150	- -	1 2	80 300	0.1 1	0.5 5	150	-	SOT89 (T1)

NPN transistors from 30 to 50V

Part number	V_{CEO} V	I_c A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
ZTX690B	45	2	1	400	-	1	100	0.1	0.5	150	-	E-Line (T1)
				150	-	2	500	1	5			
ZTX450	45	1	1	100	300	0.15	250	0.15	15	150	-	E-Line (T1)
				15	-	1						
BCW66H	45	0.8	0.33	250	630	0.1	300	0.1	10	100	-	SOT23 (T1)
ZXTN2031F	50	5	1.2	200	560	0.5	40	1	100	125	24	SOT23 (T1)
				80		5	170	5	250			
ZXTCM322	50	4	1.5	300	-	0.2	20	0.1	10	165	68	DFN322 (T1)
				100	-	2	320	4	200			
ZXTN25050DFH	50	4	1.25	300	900	0.01	60	1	100	200	40	SOT23 (T1)
				20	-	4	210	4	400			
ZXT13N50DE6	50	4	1.1	300	900	1	100	1	10	115	36	SOT23-6 (T1)
				100	-	4	230	4	100			
FCX619	50	3	1.5	300	-	0.2	25	0.1	10	165	87	SOT89 (T1)
				100	-	2	320	2.75	100			
ZXT10N50DE6	50	3	1.1	300	-	0.2	20	0.1	10	170	75	SOT23-6 (T1)
				100	-	2	200	2	50			
FMMT619	50	2	0.625	300	-	0.2	20	0.1	10	165	75	SOT23 (T1)
				100	-	2	220	2	50			
FMMTL619	50	1.25	0.5	300	-	0.2	45	0.1	10	180	160	SOT23 (T1)
				100	-	1	330	1.25	125			
ZUMT619	50	1	0.385	300	-	0.1	35	0.1	10	215	160	SOT323 (T1)
				75	-	1	270	1	50			

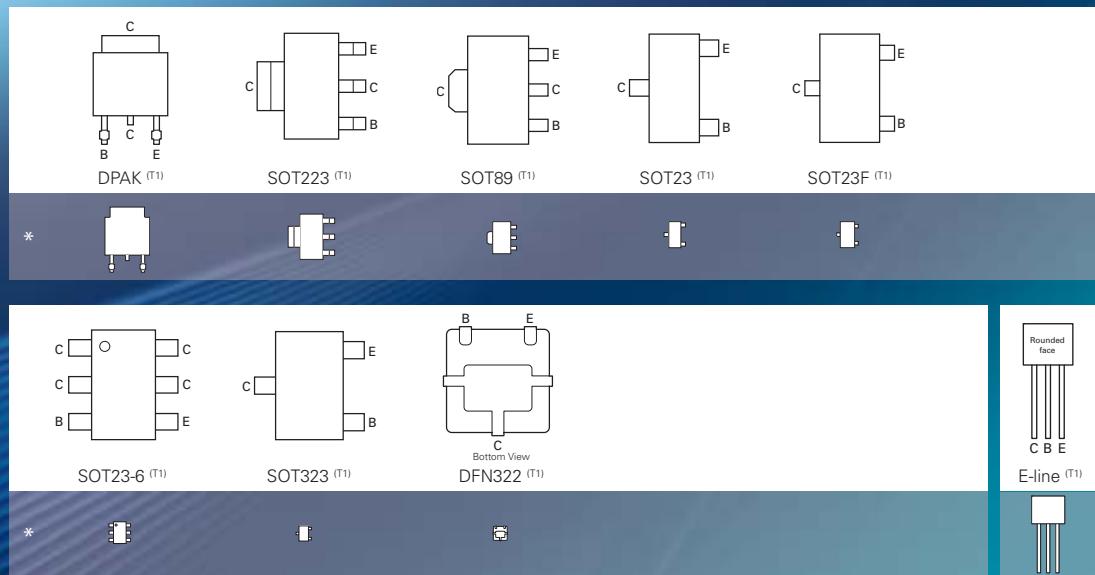


* Indicative relative size

PNP transistors from 30 to 50V

Part number	V _{CEO} V	I _C A	P _D W	h _{FE}			V _{CE(sat)}			f _T MHz	R _{CE(sat)} mΩ	Package
				Min.	Max.	@ I _C A	Max. mV	@ I _C A	@ I _B mA			
FZT949	-30	-5.5	3	100 75	300 -	-1 -5	-75 -440	-0.5 -5.5	-20 -500	100	-	SOT223 (T1)
ZX5T949G	-30	-5.5	3	100 70	300 -	-1 -5	-45 -210	-0.5 -5.5	-20 -500	110	31	SOT223 (T1)
ZXTP2008G	-30	-5.5	3	100 70	300 -	-1 -5	-45 -210	-0.5 -5.5	-20 -500	110	31	SOT223 (T1)
ZXTP2008Z	-30	-5.5	2.1	100 70	300 -	-1 -5	-55 -175	-1 -5.5	-100 -500	110	24	SOT89 (T1)
ZTX949	-30	-4.5	1.2	100 75	300 -	-1 -5	-60 -320	-0.5 -5	-20 -300	100	-	E-Line (T1)
FZT549	-30	-1	2	100 80	300 -	-0.5 -1	-500 -750	-1 -2	-100 -200	100	-	SOT223 (T1)
FZT589	-30	-1	2	100 40	300 -	-0.5 -2	-350 -650	-1 -2	-100 -200	100	-	SOT223 (T1)
FCX589	-30	-1	1	100 80	300 -	-0.5 -1	-350 -650	-1 -2	-100 -200	100	-	SOT89 (T1)
ZTX549	-30	-1	1	100 80	300 -	-0.5 -1	-500 -750	-1 -2	-100 -200	100	-	E-Line (T1)
FMMT549	-30	-1	0.5	100 40	300 -	-0.5 -2	-500 -750	-1 -2	-100 -200	100	250	SOT23 (T1)
FMMT549A	-30	-1	0.5	150 40	500 -	-0.5 -2	-300 -750	-0.1 -2	-1 -200	100	250	SOT23 (T1)
FMMT589	-30	-1	0.5	100 80	300 -	-0.5 -1	-350 -650	-1 -2	-100 -200	100	250	SOT23 (T1)
ZXTP2009Z	-40	-5.5	2.1	200	550	-0.5	-165 -175	-1 -3.5	-10 -175	152	29	SOT89 (T1)
ZX5T3Z	-40	-5.5	1.5	200 110	550 -	-0.5 5.5	-70 -185	-1 -5.5	-50 -550	152	29	SOT89 (T1)
ZXTP25040DZ	-40	-3.5	2.4	300 20	900 -	-0.01 -3.5	-90 -265	-1 -1	-100 -20	270	55	SOT89 (T1)
ZXTP07040DFF	-40	-3	1.5	300 200	800 -	-0.01 -1	-180 -540	-0.5 -2	-5 -40	200	67	SOT23F (T1)
ZXT790AK	-40	-3	3.9	250 150	-	-0.5 -2	-170 -350	-0.5 -1	-5 -10	100	83	DPAK (T1)
FZT1151A	-40	-3	2.5	250 100	800 -	-0.5 -3	-180 -300	-0.5 -3	-5 -250	145	-	SOT223 (T1)
FZT790A	-40	-3	2	250 150	-	-0.5 -2	-250 -750	-0.5 -2	-5 -50	100	125	SOT223 (T1)
ZXT3M322	-40	-3	1.5	300 60	-	-0.1 -1.5	-40 -370	-0.1 -2.5	-10 -250	190	104	DFN322 (T1)
ZXTP25040DFH	-40	-3	1.25	300 30	900 -	-0.01 -3	-85 -220	-1 -3	-100 -300	270	55	SOT23 (T1)
ZXT13P40DE6	-40	-3	1.1	300 100	900 -	-1 -3	-200 -240	-1 -3	-20 -300	115	58	SOT23-6 (T1)
FCX1151A	-40	-3	1	250 100	800 -	-0.5 -3	-180 -300	-0.5 -3	-5 -350	145	66	SOT89 (T1)

PNP transistors from 30 to 50V

Part number	V_{CEO} V	I_c A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
ZXT10P40DE6	-40	-2	1.1	300 60	-	-0.1 -1.5	-40 -300	-0.1 -2	-10 -200	190	105	SOT23-6 (T1)
FCX790A	-40	-2	1	250 150	-	-0.5 -2	-250 -450	-0.5 -2	-5 -50	100	-	SOT89 (T1)
ZTX790A	-40	-2	1	300 150	800 -	-0.01 -2	-250 -750	-0.5 -2	-5 -50	100	-	E-Line (T1)
ZXTP25040DFL	-40	-1.5	0.350	300 15	900 -	-0.01 -3	-95 -190	-0.5 -1.5	-20 -75	270	82	SOT23 (T1)
FMMT720	-40	-1.5	0.625	300 60	-	-0.1 -1.5	-40 -330	-0.1 -1.5	-10 -100	190	163	SOT23 (T1)
FZT591A	-40	-1	2	300 160	800 -	-0.1 -1	-200 -500	-0.1 -1	-1 -100	150	350	SOT223 (T1)
FCX591A	-40	-1	1	300 160	800 -	-0.1 -1	-200 -500	-0.1 -1	-1 -100	150	-	SOT89 (T1)
FMMT591A	-40	-1	0.5	300 160	800 -	-0.1 -1	-200 -500	-0.1 -1	-1 -100	150	350	SOT23 (T1)
ZXTP2041F	-40	-1	0.35	300 160	800 -	-0.1 -1	-200 -500	-0.1 -1	-1 -100	150	350	SOT23 (T1)
ZUMT720	-40	-0.75	0.385	300 40	-	-0.1 -0.75	-65 -250	-0.1 -0.75	-10 -100	220	240	SOT323 (T1)
ZTX550	-45	-1	1	100 15	300 -	-0.15 -1	-350 -	-0.15 -1	-15 -	150	-	E-Line (T1)
BCW68H	-45	-0.8	0.33	250	630	-0.1	-300	-0.1	-10	100	-	SOT23 (T1)
ZXTP2025F	-50	-5	1.2	200 70	560 -	-0.5 -5	-60 -200	-1 -5	-100 -500	190	30	SOT23 (T1)

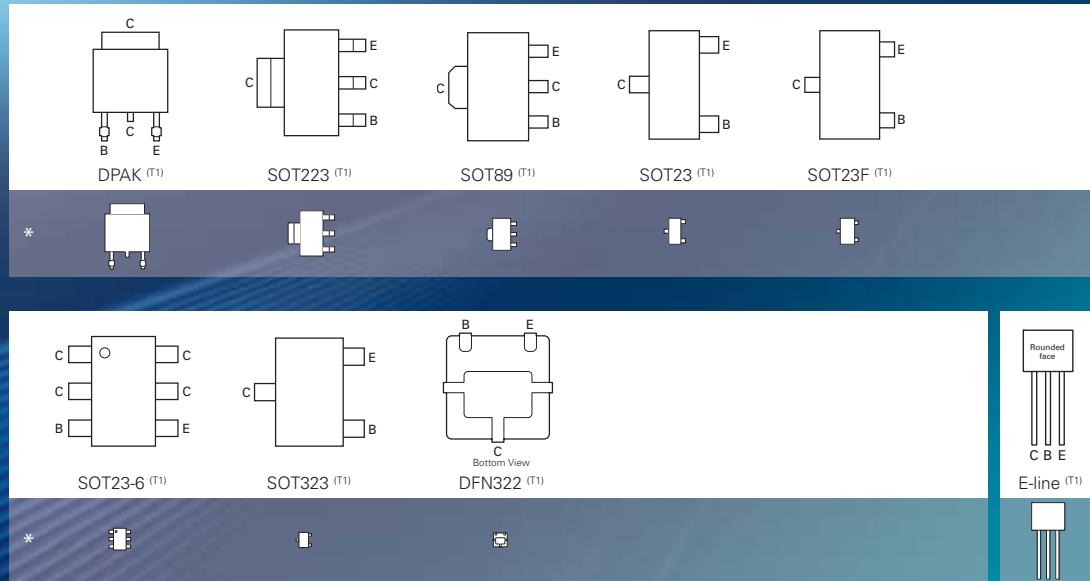

*Indicative relative size


NPN transistors from 55 to 100V

Part number	V _{CEO} V	I _C A	P _D W	h _{FE}			V _{CE(sat)}			f _T MHz	R _{CE(sat)} mΩ	Package
				Min.	Max.	@ I _C A	Max. mV	@ I _C A	@ I _B mA			
ZXTN19055DZ	55	6	2.1	250 30	700 -	0.01 6	60 250	1 6	100 600	200	28	SOT89 (T1)
ZXTN19060CG	60	7	3	200 160	500 -	0.1 2	50 150	1 2	100 40	130	30	SOT223 (T1)
FZT851	60	6	3	100 25	300 -	2 10	100 375	1 6	50 300	130	44	SOT223 (T1)
ZXTN2010G	60	6	3	100 20	300 -	2 10	70 260	1 6	50 300	130	-	SOT223 (T1)
ZX5T851G	60	6	3	100 20	300 -	2 10	70 260	1 6	50 300	130	-	SOT223 (T1)
ZXTN19060CFF	60	5.5	1.5	200 160	500 -	0.1 2	45 135	1 2	100 40	130	26	SOT23F (T1)
ZXTN2010Z	60	5	2.1	100 20	300 -	2 10	55 230	1 6	100 300	130	-	SOT89 (T1)
ZTX851	60	5	1.2	100 25	300 -	2 10	100 250	1 5	50 200	130	-	E-Line (T1)
ZXTN2018F	60	5	1.2	100 40	300	2 5	55 170	1 5	50 250	130	25	SOT23 (T1)
ZXTN25060BZ	60	4.5	1.8	100 45	300 -	0.01 2	90 305	1 5	50 500	185	48	SOT89 (T1)
ZXTN2010A	60	4.5	1	100 20	300 -	2 10	65 210	1 5	50 200	130	-	E-Line (T1)
ZX5T851A	60	4.5	1	100 20	300 -	2 10	65 210	1 5	50 200	130	-	E-Line (T1)
ZXTN25060BFH	60	3.5	1.25	100 25	300 -	0.01 3.5	65 175	1 3.5	100 350	185	43	SOT23 (T1)
FZT651	60	3	2	100 40	300 -	0.5 2	600	3	300	140	-	SOT223 (T1)
ZTX651	60	2	1	100 40	300 -	0.5 2	500	2	200	140	-	E-Line (T1)
FZT491	60	1	2	100	300	0.5	500	1	100	150	-	SOT223 (T1)
FCX491	60	1	1	100	300	0.5	500	1	100	150	-	SOT89 (T1)
ZTX451	60	1	1	50	150	0.15	350	0.15	15	150	-	E-Line (T1)
FMMT451	60	1	0.5	50	150	0.15	350	0.15	15	150	400	SOT23 (T1)
FMMT491	60	1	0.5	100 30	300 -	0.5 2	150 250	0.5 1	50 100	150	160	SOT23 (T1)
FMMT493A	60	1	0.5	500	-	0.15	500	1	100	150	-	SOT23 (T1)
ZXTN2038F	60	1	0.35	100 80	300 -	0.5 1	200 250	0.1 0.5	2 50	150	-	SOT23 (T1)
ZUMT491	60	1	0.33	100	300	0.5	500	1	100	150	-	SOT323 (T1)
FZT692B	70	2	2	400 150	-	0.5 1	500	1	10	150	-	SOT223 (T1)
ZTX692B	70	1	1	400 150	-	0.5 1	500	1	10	150	-	E-Line (T1)
ZXT1053AK	75	5	4	300 50	1200 -	1 5	160 460	1 5	10 200	140	70	DPAK (T1)
FZT1053A	75	4.5	2.5	300 40	1200 -	0.5 4.5	200 440	1 4.5	10 200	140	78	SOT223 (T1)
FCX1053A	75	3	1	300 40	1200 -	0.5 4.5	200 440	1 4.5	10 200	140	78	SOT89 (T1)
ZTX1053A	75	3	1	300 100	1200 -	1 3	150 250	1 3	10 100	140	-	E-Line (T1)

NPN transistors from 55 to 100V



Part number	V _{CEO} V	I _C A	P _D W	h _{FE}			V _{CE(sat)}			f _T MHz	R _{CE(sat)} mΩ	Package
				Min.	Max.	@ I _C A	Max. mV	@ I _C A	@ I _B mA			
ZXTEM322	80	3.5	1.5	300 110	900 -	0.2 1	20 185	0.1 1	10 20	160	68	DFN322 (T1)
FMMT620	80	1.5	0.625	300 100	900 -	0.2 1	20 185	0.1 1	10 20	160	90	SOT23 (T1)
BCX5616	80	1	1	100	250	0.15	500	0.5	50	150	-	SOT89 (T1)
BSR43	80	1	1	100	300	0.1	250	0.15	15	100	-	SOT89 (T1)
FMMTA06	80	0.5	0.33	50	-	0.1	250	0.1	10	100	-	SOT23 (T1)
FZT853	100	6	3	100 25	300 -	2 10	150 340	2 5	100 500	130	44	SOT223 (T1)
ZXTN2011G	100	6	3	100 10	300 -	2 10	65 220	1 5	100 500	130	-	SOT223 (T1)
ZX5T853G	100	6	3	100 10	300 -	2 10	65 220	1 5	100 500	130	-	SOT223 (T1)
ZXTN19100CG	100	5.5	3	200 130	500 -	0.1 1	65 140	1 1	100 20	150	43	SOT223 (T1)
ZXTN19100CZ	100	5.25	2.4	200 130	500 -	0.1 1	65 140	1 1	100 20	150	44	SOT89 (T1)
ZXTN19100CFF	100	4.5	1.5	200 130	500 -	0.1 1	135 235	1 4.5	20 450	150	38	SOT23F (T1)
ZXTN2011Z	100	4.5	2.1	100 10	300 -	2 10	60 195	1 5	100 500	130	-	SOT89 (T1)
ZX5T853Z	100	4.5	2.1	100 10	300 -	2 10	60 195	1 5	100 500	130	-	SOT89 (T1)
ZTX853	100	4	1.2	100 20	300 -	2 10	85 200	2 4	100 400	130	-	E-Line (T1)
ZXTN2020F	100	4	1.2	100 35	300 -	1 4	50 150	1 4	100 400	130	-	SOT23 (T1)
ZXTN25100DG	100	3	3	300 40	900 -	0.01 1	170 100	0.5 1	10 100	175	85	SOT223 (T1)
ZXTN25100BFH	100	3	1.25	100 50	300 -	0.01 1	80 250	1 3	100 300	160	67	SOT23 (T1)
ZXTN25100DFH	100	2.5	1.25	300 40	900 -	0.01 1	95 330	1 2.5	100 250	175	86	SOT23 (T1)
ZXTN25100DZ	100	2.5	2.4	300 40	900 -	0.01 1	170 100	0.5 1	10 100	175	80	SOT89 (T1)
FZT653	100	2	2	100 25	300 -	0.5 2	300 500	1 2	100 200	175	-	SOT223 (T1)
ZTX653	100	2	1	100 25	300 -	0.5 2	300 500	1 2	100 200	175	-	E-Line (T1)
FZT493	100	1	2	100	300	0.25	300	0.5	50	150	-	SOT223 (T1)
FCX493	100	1	1	100	300	0.25	300	0.5	50	150	-	SOT89 (T1)
ZTX453	100	1	1	40	200	0.15	700	0.15	15	150	-	E-Line (T1)
FMMT493	100	1	0.5	100	300	0.25	300	0.5	50	150	-	SOT23 (T1)

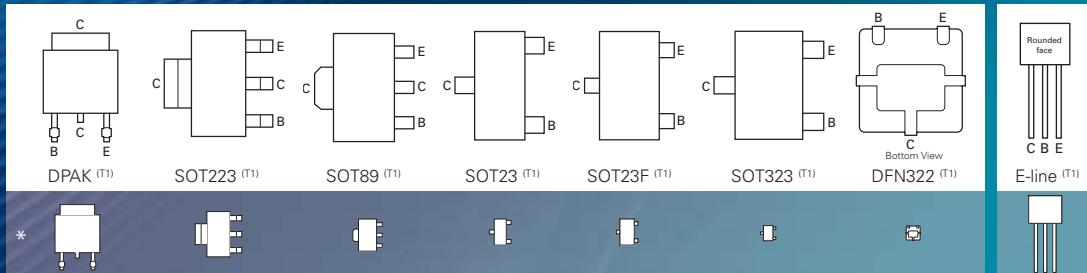

* Indicative relative size


PNP transistors from 60 to 100V

Part number	V_{CEO} V	I_C A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_C A	Max. mV	@ I_C A	@ I_B mA			
ZXT951K	-60	-6	4.2	100 15	300 -	-2 -10	-90 -400	-1 -6	-100 -600	120	53	DPAK (T1)
ZX5T1951G	-60	-6	3	100 40	-	-0.01 -5	-30 -260	-0.1 -5	-10 -500	120	40	SOT223 (T1)
ZXTP2012G	-60	-5.5	3	100 10	300 -	-2 -10	-70 -250	-1 -5	-100 -500	120	39	SOT223 (T1)
ZX5T951G	-60	-5.5	3	100 10	300 -	-2 -10	-70 -250	-1 -5	-100 -500	120	39	SOT223 (T1)
ZXTP19060CG	-60	-5	3	200 160	500 -	-0.1 -1	-80 -205	-1 -1	-100 -20	180	50	SOT223 (T1)
FZT951	-60	-5	3	100 10	300 -	-2 -10	-140 -460	-1 -5	-100 -500	120	55	SOT223 (T1)
ZXTP19060CZ	-60	-4.5	2.4	200 160	500 -	-0.1 -1	-80 -205	-1 -1	-100 -20	180	50	SOT89 (T1)
ZXTP2012Z	-60	-4.3	2.1	100 10	300 -	-2 -10	-65 -215	-1 -5	-100 -500	120	32	SOT89 (T1)
ZXTP19060CFF	-60	-4	1.5	200 160	500 -	-0.1 -1	-200 -270	-1 -4	-20 -400	180	45	SOT23F (T1)
ZTX951	-60	-4	1.2	100 10	300 -	-1 -10	-100 -300	-1 -4	-100 -400	120	-	E-Line (T1)
ZXTP2027F	-60	-4	1.2	100	300	-2	-60	-1	-100	165	31	SOT23 (T1)
ZXTP2012A	-60	-3.5	1	100 10	300 -	-1 -10	-65 -210	-1 -4	-100 -400	120	38	E-Line (T1)
FZT751	-60	-3	2	100 40	300 -	-0.5 -2	-600	-3	-300	100	-	SOT223 (T1)
ZXTP25060BFH	-60	-3	1.25	100 30	300 -	-0.01 -3	-85 -235	-1 -3	-100 -300	250	58	SOT23 (T1)
ZTX751	-60	-2	1	100 40	300 -	-0.5 -2	-500	-2	-200	100	-	E-Line (T1)
FZT591	-60	-1	2	100	300	-0.5	-600	-1	-100	150	-	SOT223 (T1)
FCX591	-60	-1	1	100	300	-0.5	-600	-1	-100	150	-	SOT89 (T1)
ZTX551	-60	-1	1	50	150	-0.15	-350	-0.15	-15	150	-	E-Line (T1)
FMMT551	-60	-1	0.5	50	150	-0.15	-350	-0.15	-15	150	-	SOT23 (T1)
FMMT591	-60	-1	0.5	100	300	-0.5	-180 -350	-0.5 -1	-50 -100	150	355	SOT23 (T1)
ZXTP2039F	-60	-1	0.35	100 80	300	-0.5 -1	-200 -300	-0.1 -0.5	-2 -50	150	-	SOT23 (T1)
ZUMT591	-60	-1	0.33	100	300	-0.5	-300	0.5	-50	150	-	SOT323 (T1)
ZXT4M322	-70	-2.5	1.5	300 175	-	-0.1 -1	-220 -260	-1 -1.5	-100 -200	150	117	DFN322 (T1)
FZT792A	-70	-2	2	250 200	-	-0.5 -1	-450 -500	-0.5 -2	-5 -200	100	-	SOT223 (T1)
ZTX792A	-70	-2	1	250 200	-	-0.5 -1	-450 -500	-0.5 -2	-5 -200	100	-	E-Line (T1)
FMMT722	-70	-1.5	0.625	300 175	-	-0.1 -1	-220 -260	-1 -1.5	-100 -200	150	-	SOT23 (T1)
BCX5316	-80	-1	1	100	250	-0.15	-500	-0.5	-50	150	-	SOT89 (T1)
BSR33	-80	-1	1	100	300	-0.1	-500	-0.5	-50	100	-	SOT89 (T1)

PNP transistors from 60 to 100V



Part number	V_{CEO} V	I_C A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_C A	Max. mV	@ I_C A	@ I_B mA			
FMMTA56	-80	-0.5	0.33	50	-	-0.1	-250	-0.1	-10	100	-	SOT23 (T1)
ZXT953K	-100	-5	4.2	100	300	-1	-100	-1	-100	125	67	DPAK (T1)
FZT953	-100	-5	-3	100	300	-1	-140	-1	-100	125	55	SOT223 (T1)
ZXTP2013G	-100	-5	3	100	300	-1	-90	-1	-100	125	60	SOT223 (T1)
ZX5T953G	-100	-5	3	100	300	-1	-90	-1	-100	125	60	SOT223 (T1)
ZXTP2013Z	-100	-3.5	2.1	100	300	-1	-85	-1	-100	125	57	SOT89 (T1)
ZTX953	-100	-3.5	1.2	100	300	-1	-100	-1	-100	125	-	E-Line (T1)
ZXTP2029F	-100	-3	1.2	100	300	-1	-80	-1	-100	150	45	SOT23 (T1)
ZXTP19100CFF	-100	-2	1.5	200	500	-0.1	-120	-1	-10	142	95	SOT23F (T1)
ZXTP19100CG	-100	-2	3	200	500	-0.1	-125	-1	-100	142	100	SOT223 (T1)
ZXTP19100CZ	-100	-2	2.4	200	500	-0.1	-125	-1	-100	142	100	SOT89 (T1)
FZT753	-100	-2	2	100	300	-0.5	-500	-2	-200	140	-	SOT223 (T1)
ZXTP25100BFH	-100	-2	1.25	100	300	-0.01	-130	-1	-100	200	108	SOT23 (T1)
ZTX753	-100	-2	1	100	300	-0.5	-500	-2	-200	120	-	E-Line (T1)
ZXTP25100CZ	-100	-1	2.4	200	500	-0.01	-315	-0.5	-20	180	155	SOT89 (T1)
FZT593	-100	-1	2	100	300	-0.5	-300	-0.5	-50	50	-	SOT223 (T1)
ZXTP25100CFH	-100	-1	1.25	200	500	-0.01	-310	-0.5	-20	180	150	SOT23 (T1)
FCX593	-100	-1	1	100	300	-0.5	-300	-0.5	-50	50	-	SOT89 (T1)
ZTX553	-100	-1	1	40	200	-0.15	-250	-0.15	-15	150	-	E-Line (T1)
FMMT723	-100	-1	0.625	300	-	-0.1	-200	-0.5	-50	200	-	SOT23 (T1)
FMMT593	-100	-1	0.5	100	300	-0.5	-300	-0.5	-50	50	-	SOT23 (T1)

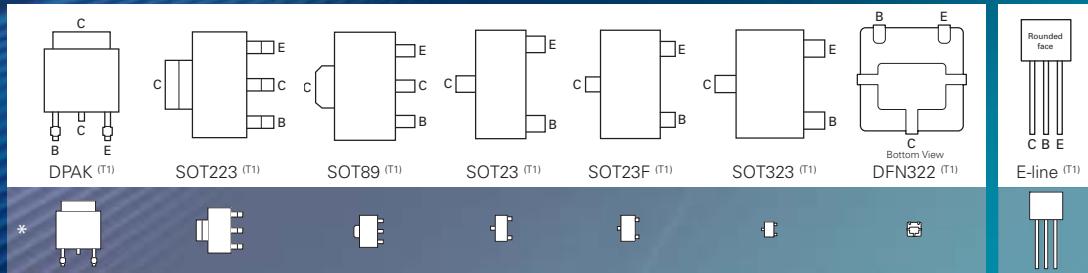

NPN transistors from 120 to 220V

Part number	V_{CEO} V	I_C A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_C A	Max. mV	@ I_C A	@ I_B mA			
FZT694B	120	1	2	400	-	0.2	250	0.1	0.5	130	-	SOT223 (T1)
FMMT494	120	1	0.5	100	300	0.25	200	0.25	25	100	-	SOT23 (T1)
ZTX694B	120	0.5	1	400	-	0.2	250	0.1	0.5	130	-	E-Line (T1)
FMMT624	125	1	0.625	300	-	0.2	220	0.5	10	100	-	SOT23 (T1)
ZTX455	140	1	1	100	300	0.15	700	0.15	15	100	-	E-Line (T1)
FMMT455	140	1	0.5	100	300	0.15	700	0.15	15	100	-	SOT23 (T1)
FZT855	150	5	3	100	300	1	65	0.5	50	90	-	SOT223 (T1)
ZTX855	150	4	1.2	100	300	1	60	0.5	50	90	-	E-Line (T1)
FCX495	150	1	1	100	300	0.25	300	0.5	50	100	-	SOT89 (T1)
FZT655	150	1	2	50	300	0.5	500	0.5	50	30	-	SOT223 (T1)
FMMT625	150	1	0.625	300	-	0.2	200	0.1	1	100	-	SOT23 (T1)
FMMT495	150	1	0.5	100	300	0.25	300	0.5	50	100	-	SOT23 (T1)
ZXTN5551FL	160	0.6	0.35	80	250	0.01	150	0.01	1	130	-	SOT23 (T1)
ZXTN5551Z	160	0.6	1.2	80	250	0.01	150	0.01	1	130	-	SOT89 (T1)
ZXTN5551G	160	0.6	2	80	250	0.01	150	0.01	1	130	-	SOT223 (T1)
FZT696B	180	0.5	2	500	-	0.1	250	0.2	5	70	-	SOT223 (T1)
ZTX696B	180	0.5	1	500	-	0.1	250	0.2	5	70	-	E-Line (T1)
ZXTN5551EFL*	220	0.6	0.35	120	300	0.01	100	0.05	5	100	-	SOT23 (T1)
ZXTN5551EZ*	220	0.6	1.2	120	300	0.01	100	0.05	5	100	-	SOT223 (T1)
ZXTN5551EG*	220	0.6	2	120	300	0.01	100	0.05	5	100	-	SOT89 (T1)


* Advance information

PNP transistors from 120 to 220V



Part number	V_{CEO} V	I_c A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA			
FZT955	-140	-4	3	100 75	300	-1 -3	-370	-3	-300	110	-	SOT223 (T1)
ZXTP2014G	-140	-4	3	100 45	300	-1 -3	-80 -360	-0.5 -3	-50 -300	120	92	SOT223 (T1)
ZX5T955G	-140	-4	3	100 45	300	-1 -3	-80 -360	-0.5 -3	-50 -300	120	85	SOT223 (T1)
ZXTP2014Z	-140	-3	2.1	100 45	300	-1 -3	-75 -330	-0.5 -3	-50 -300	120	85	SOT89 (T1)
ZX5T955Z	-140	-3	2.1	100 45	300	-0.5 -3	-75 -330	-0.5 -3	-50 -300	120	-	SOT89 (T1)
ZTX955	-140	-3	1.2	100 75	300	-1 -3	-330	-3	-300	110	-	E-Line (T1)
ZXTP23140BFH	-140	-2.5	1.25	100 40	300	1 -2.5	-95 -280	-1 -2.5	-100 -250	130	76	SOT23 (T1)
ZXTP25140BFH	-140	-1	1.25	100 20	300	-0.01 -1	-50 -260	-0.1 -1	-10 -100	75	180	SOT23 (T1)
FZT795A	-140	-0.5	2	250	-	-0.2	-300	-0.2	-5	100	-	SOT223 (T1)
ZTX795A	-140	-0.5	1	250	-	-0.2	-300	-0.2	-5	100	-	E-Line (T1)
FZT755	-150	-1	2	50	300	-0.5	-500	-1	-200	100	-	SOT223 (T1)
FMMT555	-150	-1	0.5	50	300	-0.3	-300	-0.1	-10	100	-	SOT23 (T1)
ZXTP5401FL	-150	-0.6	0.35	60	240	-0.01	-200	-0.01	-1	100	-	SOT23 (T1)
ZXTP5401Z	-150	-0.6	1.2	60	240	-0.01	-200	-0.01	-1	100	-	SOT223 (T1)
ZXTP5401G	-150	-0.6	2	60	240	-0.01	-200	-0.01	-1	100	-	SOT89 (T1)
FCX555	-180	-0.7	1.5	100 100	300	-0.01 -0.1	-300 -400	-0.1 -0.25	-10 -25	100	-	SOT89 (T1)
FZT956	-200	-2	3	100 50	300	-1 -2	-275	-2	-400	110	-	SOT223 (T1)
ZXTP03200BG*	-200	-2	3	100 35	300	-1 -2	-50 -160	-0.1 -1	-10 -100	120	120	SOT223 (T1)
ZTX956	-200	-2	1.2	100 50	300	-1 -2	-250	-2	-400	110	-	E-Line (T1)
FZT796A	-200	-0.5	2	250	-	-0.3	-300	-0.2	-20	100	-	SOT223 (T1)
ZTX796A	-200	-0.5	1	250	-	-0.3	-300	-0.2	-20	100	-	E-Line (T1)
FCX596	-200	-0.3	1	85	300	-0.25	-350	-0.25	-25	150	-	SOT89 (T1)
FMMT596	-200	-0.3	0.5	85	300	-0.25	-350	-0.25	-25	150	-	SOT23 (T1)
ZXTP5401EFL*	-220	-0.6	0.35	100	300	-0.01	-150	-0.05	-5	100	-	SOT23 (T1)
ZXTP5401EZ*	-220	-0.6	1.2	100	300	-0.01	-150	-0.05	-5	100	-	SOT223 (T1)
ZXTP5401EG*	-220	-0.6	2	100	300	-0.01	-150	-0.05	-5	100	-	SOT89 (T1)


* Advance information

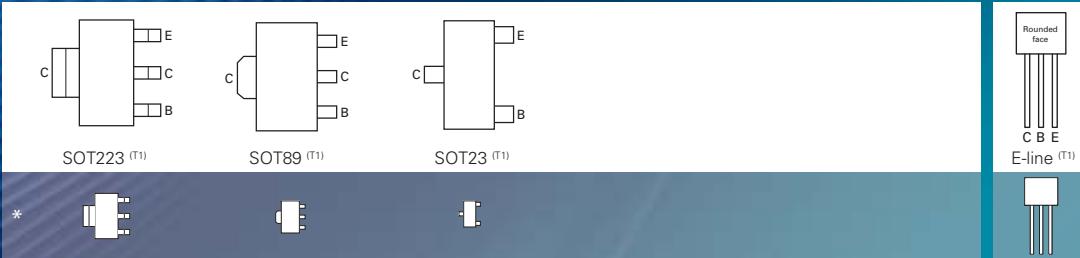

* Indicative relative size


NPN transistors from 300 to 500V

Part number	V_{CEO} V	I_C A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_C A	Max. mV	@ I_C A	@ I_B mA			
FZT857	300	3.5	3	100	300	0.5	230	2	200	80	-	SOT223 (T1)
ZTX857	300	3	1.2	100	300	0.5	250	3	600	80	-	E-Line (T1)
FZT657	300	0.5	2	50	-	0.1	500	0.1	10	30	-	SOT223 (T1)
FZTA42	300	0.5	2	40	-	0.03	500	0.02	2	50	-	SOT223 (T1)
SXTA42	300	0.5	1	40	-	0.03	500	0.02	2	50	-	SOT89 (T1)
ZTX457	300	0.5	1	50	300	0.05	300	0.1	10	75	-	E-Line (T1)
ZTX657	300	0.5	1	50	-	0.1	500	0.1	10	30	-	E-Line (T1)
FMMT497	300	0.5	0.5	80	300	0.1	200	0.1	10	75	-	SOT23 (T1)
FMMTA42	300	0.2	0.33	40	-	0.03	500	0.02	2	50	-	SOT23 (T1)
BST39	350	0.5	1	40	-	0.02	500	0.05	4	70	-	SOT89 (T1)
FMMT6517	350	0.5	0.33	30	200	0.03	500	0.03	3	50	-	SOT23 (T1)
FZT658	400	0.5	2	50	-	0.1	500	0.1	10	50	-	SOT223 (T1)
ZXTN08400BFF	400	0.5	1.5	100	300	0.05	70	0.05	5	40	-	SOT23F (T1)
FCX658A	400	0.5	1	55	-	0.1	200	0.2	10	50	-	SOT89 (T1)
ZTX658	400	0.5	1	50	-	0.1	500	0.1	10	50	-	E-Line (T1)
FZT458	400	0.3	2	100	300	0.05	500	0.05	6	50	-	SOT223 (T1)
ZTX458	400	0.3	1	100	300	0.05	500	0.05	6	50	-	E-Line (T1)
FCX458	400	0.225	1	100	300	0.05	500	0.05	6	50	-	SOT89 (T1)
FMMT458	400	0.225	0.5	100	300	0.05	500	0.05	6	50	-	SOT23 (T1)
FMMT459	500	0.15	0.625	50	-	0.03	75	0.02	2	50	-	SOT23 (T1)

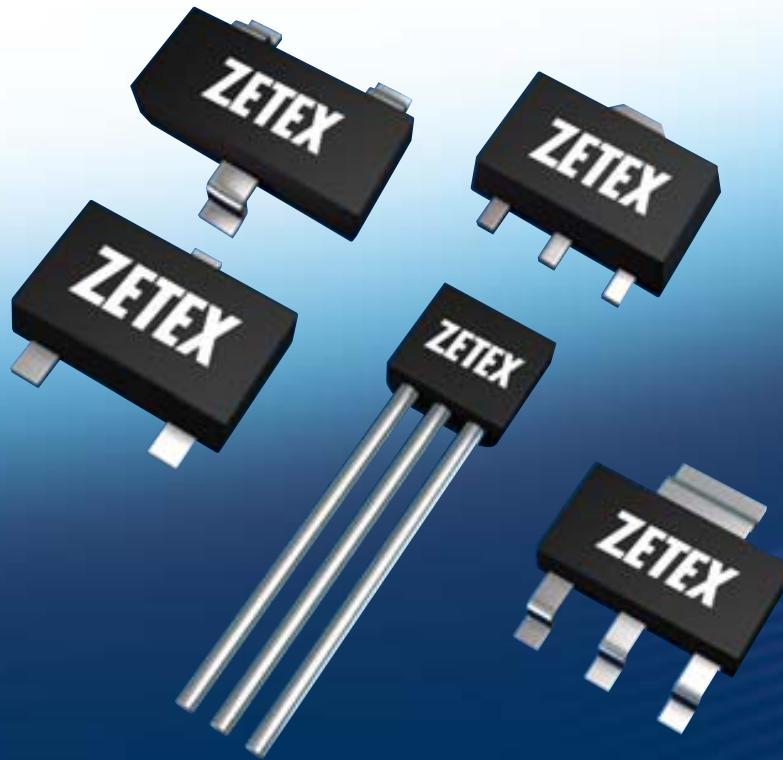

PNP transistors from 300 to 500V

Part number	V_{CEO} V	I_C A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	$R_{CE(sat)}$ mΩ	Package
				Min.	Max.	@ I_C A	Max. mV	@ I_C A	@ I_B mA			
FZT957	-300	-1	3	100	300	-0.5	-240	-1	-300	85	-	SOT223 (T1)
ZTX957	-300	-1	1.2	100	300	-0.5	-200	-1	-300	85	-	E-Line (T1)
FZT757	-300	-0.5	2	40	-	-0.01	-500	-0.1	-10	30	-	SOT223 (T1)
FZTA92	-300	-0.5	2	25	-	-0.03	-500	-0.02	-2	50	-	SOT223 (T1)
ZTX757	-300	-0.5	1	40	-	-0.01	-500	-0.1	-10	30	-	E-Line (T1)
FMMT597	-300	-0.2	0.5	100	-	-0.1	-250	-0.1	-20	75	-	SOT23 (T1)
FMMTA92	-300	-0.2	0.33	25	-	-0.03	-500	-0.02	-2	50	-	SOT23 (T1)
FMMT6520	-350	-0.5	0.33	30	200	-0.03	-500	-0.03	-3	50	-	SOT23 (T1)
FZT958	-400	-0.5	3	100	300	-0.5	-400	-0.5	-100	85	-	SOT223 (T1)
ZTX958	-400	-0.5	1.2	100	300	-0.5	-400	-0.5	-100	85	-	E-Line (T1)
FZT758	-400	-0.5	2	50	-	-0.1	-500	0.1	-10	50	-	SOT223 (T1)
ZTX758	-400	-0.5	1	50	-	-0.1	-500	-0.1	-10	50	-	E-Line (T1)
FZT558	-400	-0.2	2	100	300	-0.05	-500	-0.05	-6	50	-	SOT223 (T1)
ZXTPO8400BFF	-400	-0.2	1.5	100	300	-0.05	-125	-0.05	-5	70	-	SOT23F (T1)
FCX558	-400	-0.2	1	100	300	-0.05	-500	-0.05	-6	50	-	SOT89 (T1)
ZTX558	-400	-0.2	1	100	300	-0.05	-500	-0.05	-6	50	-	E-Line (T1)
FMMT558	-400	-0.15	0.5	100	300	-0.05	-500	-0.05	-6	50	-	SOT23 (T1)
FZT560	-500	-0.15	2	80	300	-0.05	-200	-0.02	-2	60	-	SOT223 (T1)
ZTX560	-500	-0.15	1	80	300	-0.05	-200	0.02	-2	60	-	E-Line (T1)
FMMT560	-500	-0.15	0.5	80	300	-0.05	-200	-0.02	-2	60	-	SOT23 (T1)

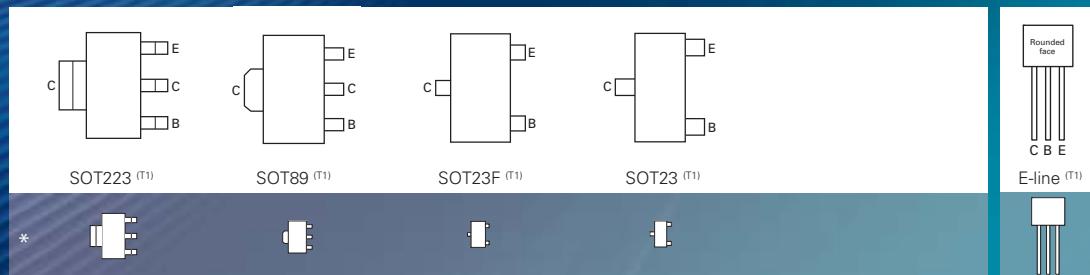

NPN avalanche transistors

Part number	V_{CEO} V	I_{CM} A	P_D W	I_{USB}		h_{FE}		f_T		Package	
				A	@ V_c V	Min.	@ I_c mA	MHz	@ I_B mA		
FMMT413	150	50	50	0.33	25	130	50	10	150	10	SOT23 (T1)
FMMT415	260	100	60	0.33	25	250	25	10	40	10	SOT23 (T1)
ZTX415	260	100	60	0.68	25	250	25	10	40	10	E-Line (T1)
FMMT417	320	100	60	0.33	25	250	25	10	40	10	SOT23 (T1)

NPN Darlington transistors

Part number	V_{CEO} V	I_c A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	Package
				Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA		
FZTA14	30	1	2	5000	-	1	1600	1	1	170	SOT223 (T1)
FMMTA13	40	0.3	0.33	10000	-	0.1	900	0.1	0.1	-	SOT23 (T1)
FMMTA14	40	0.3	0.33	20000	-	0.1	900	0.1	0.1	-	SOT23 (T1)
BCV47	60	0.5	0.33	2000	-	0.5	1000	0.1	0.1	170	SOT23 (T1)
BCV49	60	0.5	1	10000	-	0.1	1000	0.1	0.1	170	SOT89 (T1)
BCX38C	60	0.8	1	10000	-	0.5	1250	0.8	8	-	E-Line (T1)
FMMT38C	60	0.3	0.33	10000	-	0.5	1250	0.8	8	-	SOT23 (T1)
BST52	80	0.5	1	2000	-	0.5	1300	0.5	0.5	-	SOT89 (T1)
FZT603	80	2	2	2000	-	2	1000	1	1	150	SOT223 (T1)
ZTX603	80	1	1	5000	-	0.5	1000	1	1	150	E-Line (T1)
FMMT614	100	0.5	0.5	5000	-	0.5	1000	0.5	5	-	SOT23 (T1)
FMMT634	100	0.9	0.625	15000	-	1	960	1	5	140	SOT23 (T1)
ZTX614	100	0.8	1	10000	-	0.5	1250	0.8	8	-	E-Line (T1)
ZXTN04120HFF	120	1	1.5	3000 1000	- -	0.5 2	1500 1500	1 2	1 5	120	SOT23F (T1)
FCX605	120	1	1	2000	100000	1	1500	1	1	150	SOT89 (T1)
FZT605	120	1.5	2	2000	100000	1	1500	1	1	150	SOT223 (T1)
ZTX605	120	1	1	2000	100000	1	1500	1	1	150	E-Line (T1)
FZT600	140	2	2	2000	100000	0.5	1200	1	10	150	SOT223 (T1)
FZT600B	140	2	2	10000	100000	0.5	1200	1	10	150	SOT223 (T1)
ZTX601	160	1	1	2000	100000	0.5	1200	1	10	150	E-Line (T1)
ZTX601B	160	1	1	10000	100000	0.5	1200	1	10	150	E-Line (T1)

PNP Darlington transistors

Part number	V_{CEO} V	I_c A	P_D W	h_{FE}			$V_{CE(sat)}$			f_T MHz	Package
				Min.	Max.	@ I_c A	Max. mV	@ I_c A	@ I_B mA		
FMMT734	-100	-0.8	0.625	15000	-	-1	-970	-0.8	-5	140	SOT23 (T1)
ZXTP05120HFF	-120	-1	1.5	3000 1000	- -	-0.5 -2	-1500 -1500	-1 -2	-1 -5	120	SOT23F (T1)
FCX705	-120	-1	1	3000	30000	-1	-1300	-1	-1	160	SOT89 (T1)
FZT705	-120	-2	2	3000	30000	-1	-1300	-1	-1	160	SOT223 (T1)
ZTX705	-120	-1	1	3000	30000	-1	-1300	-1	-1	160	E-Line (T1)



H-bridges

Part number	Polarity	V_{CEO}	I_c	P_d	h_{FE}		$V_{CE(sat)}$			Package
					Min.	@ I_c A	Max. mV	@ I_c A	@ I_b mA	
ZHB6718	2 x NPN 2 x PNP	20 -20	2.5 -2.5	2	200 150	2 -2	0.15 -0.2	1 -1	10 -20	SM8 (T3)
ZHB6790	2 x NPN 2 x PNP	40 -40	2 -2	2	150 150	2 -2	0.5 -0.45	1 -1	5 -10	SM8 (T3)
ZHB6792	2 x NPN 2 x PNP	70 -70	1 -1	2	150 200	1 -1	0.5 -0.5	1 -1	10 -25	SM8 (T3)

NPN/PNP combinations



Part number	Polarity	V_{CEO}	I_c	I_{CM}	P_d	h_{FE}		$V_{CE(sat)}$			Package
						Min.	@ I_c A	Max. mV	@ I_c A	@ I_b mA	
ZXTC2061E6	NPN PNP	12 -12	5 -3.5	12 -10	1.1	500 500	0.01 -0.01	40 -70	1 -1	100 -100	SOT23-6 (T2)
ZXTDA1M832	NPN PNP	15 -12	4.5 -4	15 -12	1.5	200 180	3 -2.5	100 -140	1 -1	10 -10	DFN832 (T2)
ZXTD6717E6	NPN PNP	15 -12	1.5 -1.25	5 -3	1.1	200 200	1 -0.5	200 -215	1 -1	10 -50	SOT23-6 (T2)
ZXTC2062E6	NPN PNP	20 -20	4.5 -3.5	10 -10	1.1	300 300	0.01 -0.01	50 -65	1 -1	100 -100	SOT23-6 (T2)
ZXTDB2M832	NPN PNP	20 -20	4.5 -3.5	12 -6	1.5	200 150	2 -2	150 -220	1 -1	10 -20	DFN832 (T2)
ZDT6718	NPN PNP	20 -20	2 -1.5	6 -6	2.5	200 150	2 -2	200 -220	2.5 -1.5	50 -50	SM8 (T2)
ZXTC2045E6	NPN PNP	30 -30	1.5 -1.5	5 -5	1.1	180 180	0.1 -0.1	375 -375	0.75 -0.75	15 -15	SOT23-6 (T2)
ZXTD4591AM832	NPN PNP	40 -40	2 -1.5	3 -3	1.5	300 250	0.5 -0.5	300 -350	0.5 -0.5	50 -20	DFN832 (T2)
ZDT6790	NPN PNP	45 -40	2 -2	6 -6	2.75	150 150	2 -2	500 -450	1 -1	5 -10	SM8 (T2)
ZXTDC3M832	NPN PNP	50 -40	4 -3	6 -4	1.5	200 180	1 -1	100 -220	1 -1	50 -50	DFN832 (T2)
ZXTC2063E6	NPN PNP	40 -40	3.5 -3	9 -9	1.1	300 300	0.01 -0.01	60 -90	1 -1	100 -100	SOT23-6 (T2)
ZXTD4591E6	NPN PNP	60 -60	1 -1	2 -2	1.1	100 100	0.5 -0.5	250 -300	0.5 -0.5	50 -50	SOT23-6 (T2)
ZXTDE4M832	NPN PNP	80 -70	3.5 -2.5	5 -3	1.5	110 175	1 -1	185 -220	1 -1	20 -100	DFN832 (T2)
ZDT6753	NPN PNP	100 -100	2 -2	6 -6	2.75	100 100	0.5 -0.5	500 -500	2 -2	200 -200	SM8 (T2)

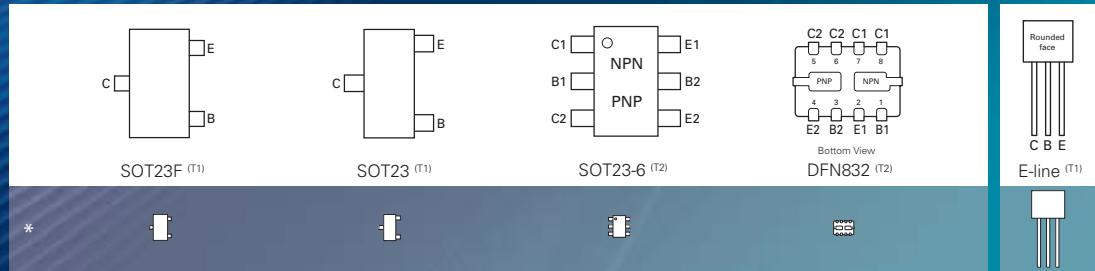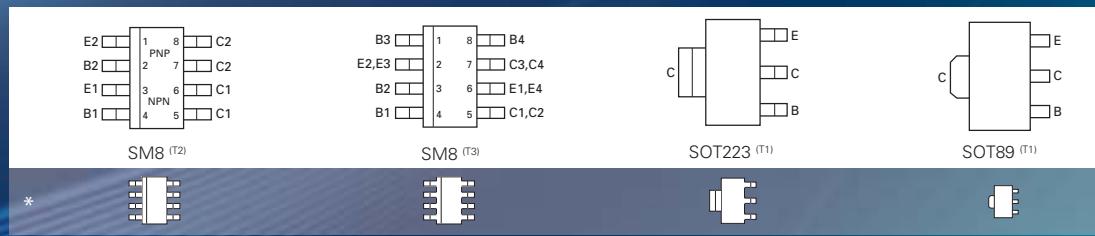

* Indicative relative size

Dual NPN transistors



Part number	Polarity	V_{CEO} V	I_C A	P_D W	h_{FE}		$V_{CE(sat)}$			Package
					Min.	@ I_C A	Max. mV	@ I_C A	@ I_B mA	
ZXTDAM832	2 x NPN	15	4.5	1.5	200	3	100 280	1 4.5	10 50	DFN832 (T1)
ZDT1048	2 x NPN	17.5	5	2.75	250	5	240	5	100	SM8 (T1)
ZXTDBM832	2 x NPN	20	4.5	1.5	200	2	150 270	1 4.5	10 125	DFN832 (T1)
ZXT12N20DX	2 x NPN	20	3.5	1.25	300 200	1 3.5	100 200	1 3.5	10 50	MSOP8 (T1)
ZDT1049	2 x NPN	25	5	2.75	200	4	220	4	50	SM8 (T1)
ZXT12N50DX	2 x NPN	50	3	1.25	300 150	1 3	120 250	1 3	10 50	MSOP8 (T1)
ZXTD09N50DE6	2 x NPN	50	1	1.1	300	1	270	1	50	SOT23-6 (T3)
ZXTDCM832	2 x NPN	50	4	1.5	200	1	100	1	50	DFN832 (T1)
ZDT1053	2 x NPN	75	5	2.75	300	1	440	5	250	SM8 (T1)
ZDT694	2 x NPN	120	0.5	2.75	400	0.2	500	0.4	5	SM8 (T1)
ZXTD2075E6*	2 x NPN	300	0.2	1.1	40	0.03	200	0.02	2	SOT23-6 (T1)


* Advance information

Dual PNP transistors




Part number	Polarity	V_{CEO} V	I_C A	P_D W	h_{FE}		$V_{CE(sat)}$			Package
					Min.	@ I_C A	Max. mV	@ I_C A	@ I_B mA	
ZXTD1M832	2 x PNP	-12	-4	1.5	180	-2.5	-140 -300	-1 -4	-10 -150	DFN832 (T1)
ZXT12P12DX	2 x PNP	-12	-3	1.25	300 200	-1 -3	-85 -270	-1 -3	-20 -30	MSOP8 (T1)
ZXTD2M832	2 x PNP	-20	-3.5	1.5	150	-2	-220 -300	-1 -3.5	-20 -350	DFN832 (T1)
ZDT749	2 x PNP	-25	-2	2.75	75	-2	-500	-2	-200	SM8 (T1)
ZXT12P40DX	2 x PNP	-40	-2	1.25	300 150	-1 -2	-215 -260	-1 -2	-20 -100	MSOP8 (T1)
ZDT751	2 x PNP	-60	-2	2.75	80	-1	-500	-2	-200	SM8 (T1)
ZDT795A	2 x PNP	-140	-0.5	2.75	250	-0.2	-300	-0.2	-5	SM8 (T1)

Transistor and Schottky diode combinations



Part number	Polarity	V_{CEO} V_R	I_C A	P_D W	Transistor					Schottky diode		Package	
					h_{FE}		$R_{CE(sat)}$	$V_{CE(sat)}$	@ I_C A	@ I_B mA	V_F max V	@ I_F A	
					Min.	@ I_C A	Typ. $m\Omega$	Max. V					
ZX3CD1S1M832	PNP Diode	-12 40	-4 1.85	1.5 1.2	300	-0.1	60	-0.14	-1	-10	- 0.5	- 1	DFN832 (T3)
ZX3CDBS1M832	NPN Diode	20 40	4.5 1.85	1.5 1.2	300	0.2	47	0.15	1	10	- 0.5	- 1	DFN832 (T3)
ZX3CD2S1M832	PNP Diode	-20 40	-3.5 1.85	1.5 1.2	300	-0.1	64	-0.22	-1	-20	- 0.5	- 1	DFN832 (T3)
ZX3CD3S1M832	PNP Diode	-40 40	-3 1.85	1.5 1.2	300	-0.1	104	-0.22	-1	-50	- 0.5	- 1	DFN832 (T3)

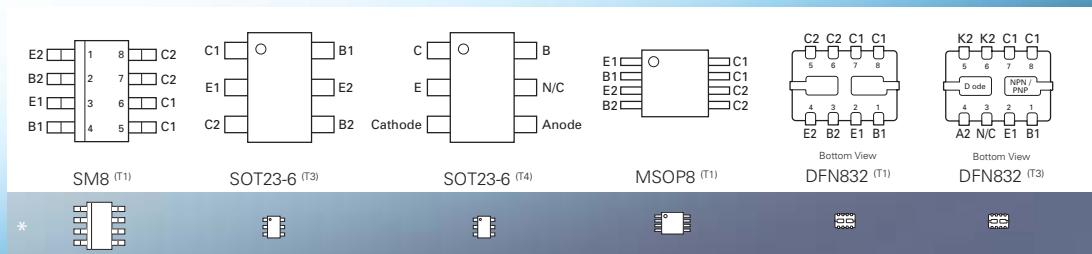


* Indicative relative size


Gate drive transistors

- Fast switching emitter-follower configuration
- SOT23-6 package
- Optimised pin-out to ease board layout and minimize trace inductance
- Separate emitters for independent control of rise and fall time
- Low input current requirement
- No latch up
- No shoot through
- Near zero quiescent and output leakage current

Part number	V_{IN} Max V	V_{CC} Max V	I_{source} @ I_{IN} A	I_{sink} = 10mA A	I_{sinkPK} Max A	I_{IN} Max A	Gate Driver Switching Times (typ)				@ Condition	Package
							$t_{d(rise)}$ ns	t_r ns	$t_{d(fall)}$ ns	t_f ns		
ZXGD3001E6	12	12	4.2	2.2	9	1.0	1.3	7.3	3	11	$C_L = 1nF$, $R_L = 1\Omega$, $V_{CC} = 8V$, $V_{IN} = 6V$, $R_S = 25\Omega$	SOT23-6 (T6)
ZXGD3002E6	20	20	2.2	2.0	9	1.0	1.25	8.3	1.6	10.8	$C_L = 1nF$, $R_L = 1\Omega$, $V_{CC} = 12V$, $V_{IN} = 10V$, $R_S = 25\Omega$	SOT23-6 (T6)
ZXGD3003E6	40	40	1.6	1.4	5	1.0	1.8	8.9	1.7	8.9	$C_L = 1nF$, $R_L = 1\Omega$, $V_{CC} = 12V$, $V_{IN} = 10V$, $R_S = 25\Omega$	SOT23-6 (T6)
ZXGD3004E6	40	40	1.9	1.9	8	1.0	1.1	13.4	0.95	12.4	$C_L = 1.5nF$, $R_L = 0.1\Omega$, $V_{CC} = 15V$, $V_{IN} = 12.5V$, $R_S = 25\Omega$	SOT23-6 (T6)



*Indicative relative size

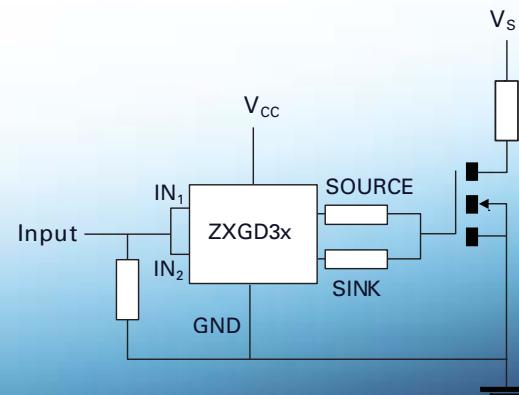



Article

Applications dictate bipolar or MOSFET power switch choices

Section 1.1

Bipolar transistors have continued to be developed to rival or exceed MOSFET performance in many applications. It's therefore important to review the characteristics and benefits of each technology to extract the best system performance.

The first characteristic that designers often consider is on-state resistance for a given breakdown voltage. Figure 1 shows the rapid advances made by Zetex in recent years. Furthermore, bipolar transistors benefit from conductivity modulation, an effect that increases the advantage that the bipolar transistors hold over MOSFETs as breakdown voltages increase.

Also, don't forget that bipolar transistors block voltage in two directions, as specified by their BV_{EBO} or BV_{ECO} characteristic which can eliminate the need for a series diode and its attendant conduction losses. (See Application example 1.)

How resistance changes with temperature affects the current capability of a power switch. The rise in bipolar $R_{CE(sat)}$ is generally half that of a MOSFET's equivalent $R_{DS(on)}$ leading to cooler running and higher continuous currents.

Drive requirements are arguably where bipolar and MOSFETs differ most and care must be taken to account for the bipolar's base drive loss in power dissipation calculations. However, bipolar are fully turned on at around one volt, whereas the achievable $R_{DS(on)}$ of a MOSFET may be limited in low voltage applications by the available drive voltage over threshold.

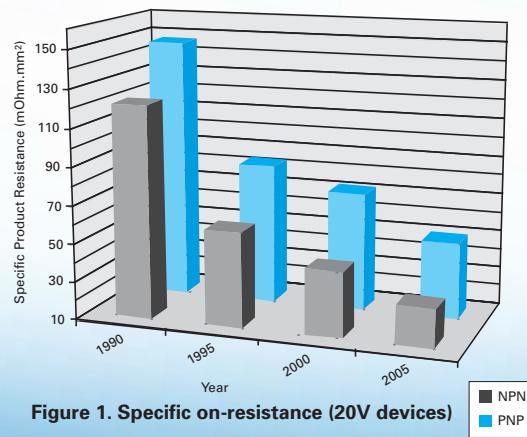


Figure 1. Specific on-resistance (20V devices)

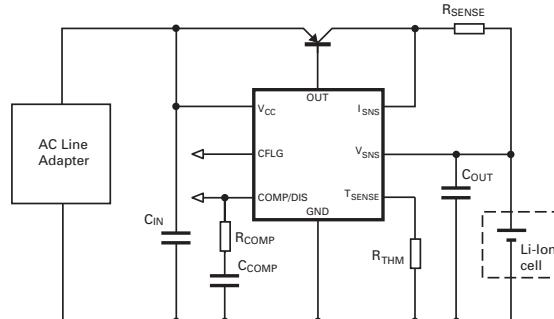


Figure 2. A typical linear charger circuit

Bipolars are slower switching than MOSFETs when operated as a saturated switch, provided the MOSFET has a sufficiently high-current drive. Ironically perhaps, bipolars are often employed as MOSFET pre-drivers, exploiting their high-current capabilities and fast switching speed when operating in the linear region (see Application example 2).

By understanding the relative strengths and weaknesses of each technology the performance-cost relationship can be maximized. A summary of the key parametric differences of the competing technologies appears in the table opposite.

Application example 1: Linear mode battery charging

Linear chargers are simple, small, and emit no EMI making them suitable for low noise environments. They use an external pass element to drop the voltage from the input supply to the battery voltage thus power dissipation is high. A typical linear charger circuit is shown in Figure 2.

Power losses in the transistor are dominated by the collector-emitter losses:

$$P_{D(CE)} = I_{CHG} \times (V_{IN} - V_{DCD} - V_{SENSE}) (W)$$

where $V_{SENSE} = I_{CHG} \times R_{SENSE} (V)$

and the selection criteria usually include current capability, gain, cost, and package dissipation. Bipolar PNP transistors are advantageous in this application because of their bi-directional blocking capability, whereas a MOSFET requires a series Schottky diode to prevent current flowing from the battery to the supply, through its body diode.

Application example 2: MOSFET gate drivers

High current low $R_{DS(on)}$ MOSFETs can exhibit gate capacitances that require amps of drive current. For example, a typical 100V MOSFET with a gate charge of 50nC, requires 2.5 amps to switch in 20ns.

Bipolar transistors are ideally suited as gate drivers because they feature fast switching in linear mode, high pulse-current capability, and high current density - hence small size and cost. One of the most popular and cost-effective drive circuits is a bipolar, non-inverting totem-pole driver (see Figure 3)

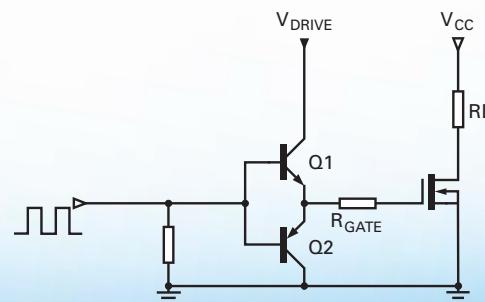


Figure 3. Totem-pole driver stage for power MOSFET

Characteristic	Bipolar transistor	MOSFET
'On' resistance	Excellent - down to half that of the best MOSFET, depending on drive current available.	Good at full enhancement Moderate at low gate drive
Blocking voltage	Bi-directional blocking capability. BV_{CES} , BV_{CEV} or BV_{CBO} may be appropriate for some applications.	Mono-directional, may require a series Schottky diode or back-to-back MOSFET pair in some applications.
Pulse current	High	Moderate
Drive voltage	Less than 1V	1.8V to 10V, depending on the optimization
Temperature stability	Excellent: V_{BE} : approx. 2mV per $^{\circ}\text{C}$ $R_{CE(sat)}$ approx. 0.4% per $^{\circ}\text{C}$	$R_{DS(on)}$ approx. 0.6% per $^{\circ}\text{C}$
Drive power	Moderate	High frequency: moderate
Speed	Linear switch: very fast Saturated switch: moderate	Fast
ESD sensitivity	Very rugged	Sensitive
Price per area of silicon	Comparable	Comparable

If the MOSFET is required to switch at 1MHz from a 5V drive the power dissipation in each driver transistor can be estimated as:

$$P_{D(npn)} = ((V_{DRIVE} - (V_G/2)) \times Q \times f) + (V_{BE} \times I_B \times t \times f)$$

$$P_{D(pnp)} = (V_G/2 \times Q \times f) + (V_{BE} \times I_B \times t \times f)$$

With both devices dissipating just 256mW, small surface mount bipolar transistors are ideal, preferably co-packaged as complementary dual devices.

Application example 3: Resonant converter for CCFL backlight applications

The backlight module of an LCD display requires high efficiency operation and is sensitive to cost. There are two basic circuit topologies for driving the CCFL lamps:

- Resonant converter, using a bipolar transistor half-bridge, or
- IC controller plus MOSFET half-bridge.

Resonant converter circuits are cheaper than IC controller/ MOSFET solutions and, with careful optimization, efficiencies of greater than 90% can be achieved. A simplified circuit is shown in Figure 4:

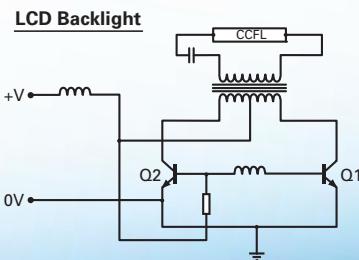


Figure 4. Resonant converter for LCD backlight

The important power switch selection characteristics are voltage rating, on-state resistance, gain and cost. The circuit makes use of the reverse BV_{EBO} rating and allows the use of the BV_{CEV} , or BV_{CES} characteristic, thus allowing a lower BV_{CEO} rated device with a lower on-state resistance than its MOSFET equivalent.

Application example 4: DC brushless motor driving

Brushless DC motors are popular due to their high efficiency, high torque, longer operating life, reduced noise and lower EMI.

Commutation is effected by switching the current in the windings of the stator in the required sequence to produce a rotating magnetic field synchronous with the rotor. Single phase, 2-phase or 3-phase motors, require respectively 1, 2 or 3 stator windings. Speed control is usually achieved by PWM.

In 2-phase circuits each winding is energized for half of the time and is switched by a single drive transistor. In single-phase bridge circuits (Figure 5) the winding current is synchronously commutated by switching diagonal pairs of transistors, therefore the single winding results in a cheaper, lighter motor but the drive circuitry is more complex.

In 3-phase bridge circuits a third leg is added to the bridge which means that both motor and drive costs are higher.

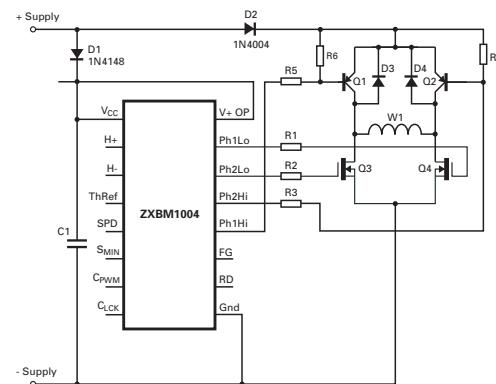


Figure 5.
Single-phase fan motor circuit

Common to all circuit types, the requirements of the switch are to be directly driven by the control circuit; to minimize the voltage drop in the power switch in order to maximize rotor speed and circuit efficiency; to survive stall currents and inductive transients during switching.

In low voltage, low current applications e.g. PC fans, where IC motor controllers are required to operate on 3V rails, there are opportunities to make effective use of a bipolar transistor's high current gain hold-up and low $R_{CE(sat)}$ at low drive voltages where MOSFETs struggle to be cost effective. The fan motor circuit in Figure 5 is a hybrid bridge circuit where PNP bipolar transistors are used for the high side pair, and N-Channel MOSFETs are used for the low side PWM driven pair. This combination takes advantage of the PNP transistor's low $R_{CE(sat)}$ which helps achieve high rotor speed.

To read this article in full, go to
www.zetex.com/thinkbipolar

Diodes

Section 2.0

Schottky diodes

The ZHCS series of Schottky diodes provides low-loss rectification at ampere-level currents from 40 to 60V in a range of packages. Specifications that characterize each device's maximum forward voltage at its maximum operating current ease worst-case design calculations.

The ZLLS series extends this class-leading performance to minimize reverse leakage at elevated temperatures. These 40V devices also offer the ability to rectify more than 2A from within a SOT23 outline.

Varactor (tuner) diodes

Designed around two specific C-V curves, the portfolio comprises a range of capacitance variants in a selection of miniature surface mount packages.

Developed for high Q at low voltage and with inherent low phase noise, the devices are ideal for various tuning circuits found in such products as DAB radios and crystal oscillators.

Power rectifier diodes

The BYY and BYP series of rectifier diodes are available in press-fit packages and cover a current range up to 50 amps and voltage up to 1500 volts.

Power zener diodes

The BZP and BZV series offer zener voltages of 22, 33 and 39V and currents up to 50A and are housed in press-fit packages. The press-fit package is available with different package modifications (connectors, wires, flexible cable).

Rectifier stacks

Rectifier stacks are manufactured based on the power rectifier diodes of the BYY and BYP series. Their optimized design means they are not sensitive to overload and high temperature. Rectifier stacks are available for self, forced air and oil cooling methods.

Back-off diodes

Again based on the BYY and BYP series of power rectifier diodes these offer a drop voltage of 0.83V per diode.



Contents

Schottky diodes

Schottky rectifier diodes	38
Dual Schottky diodes	38
Multiple Schottky diodes	39

Varactor (tuner) diodes

12 volt hyperabrupt varactor diodes	39
25 volt hyperabrupt varactor diodes	40

Power diodes

Rectifier diodes	40
Power zener diodes	40
Rectifier stacks	40
Back-off diodes	40




Schottky diodes ➔

Part number	V _R Max.	I _F	I _{FSM}	V _F		I _R		C _D @ f = 1MHz		t _{rr} ns	P _D W	Package
				Max. V	Max. mA	Max. A	Max. mV	@ I _F mA	Max. μA	@ V _R V	Typ. pF	@ V _R V
ZLLS410	10	570	17	380	100	5	8	26	10	3	0.33	SOD323 (D1)
BAT54	30	200	0.6	500	30	4	25	7.5	1	5	0.33	SOT23 (D1)
ZLLS2000	40	2200	36	540	2000	40	30	65	30	6	1.1	SOT23-6 (D1)
ZHCS2000	40	2000	20	500	2000	300	30	50	25	5.5	1.1	SOT23-6 (D1)
ZLLS1000	40	1160	22	560	1000	20	30	26	30	4	0.625	SOT23 (D1)
ZHCS1000	40	1000	12	425	1000	100	30	25	25	12	0.5	SOT23 (D1)
BAT1000	40	1000	12	425	1000	100	30	25	25	12	0.35	SOT23 (D1)
ZHCS750	40	750	12	490	750	100	30	25	25	12	0.5	SOT23 (D1)
BAT750	40	750	12	490	750	100	30	25	25	12	0.35	SOT23 (D1)
ZLLS500	40	700	13	530	500	10	30	16	30	3	0.5	SOT23 (D1)
ZHCS500	40	500	6.75	550	500	40	30	20	25	10	0.33	SOT23 (D1)
ZLLS400	40	520	12	500	400	10	30	15	30	2.46	0.33	SOD323 (D1)
ZHCS400	40	400	6.75	500	400	40	30	20	25	10	0.25	SOD323 (D1)
ZLLS350	40	380	6	1000	275	4	30	3.5	30	1	0.36	SOD523 (D1)
ZHCS350	40	350	4.2	810	350	12	30	3.3	25	1.6	0.33	SOD523 (D1)
ZHCS1006	60	900	12	600	1000	100	45	17	25	12	0.5	SOT23 (D1)
ZHCS756	60	750	12	610	750	100	45	17	25	12	0.5	SOT23 (D1)
ZHCS506	60	500	5.5	630	500	40	45	10	25	10	0.33	SOT23 (D1)

Dual Schottky diodes ➔

Part number	V _R	I _F	I _{FSM}	V _F		I _R		C _D @ f = 1MHz		t _{rr} ns	P _D W	Package
				Max. V	Max. mA	Max. A	Max. mV	@ I _F mA	Max. μA	@ V _R V	Typ. pF	@ V _R V
BAT54A	30	200	0.6	500	30	4	25	10	1	5	0.33	SOT23 (D2)
BAT54C	30	200	0.6	500	30	4	25	10	1	5	0.33	SOT23 (D3)
BAT54S	30	200	0.6	500	30	4	25	10	1	5	0.33	SOT23 (D)
ZXSD500E6*	40	800	13	550	500	10	30	16	30	3	1.1	SOT23-6 (D2)
ZXSDS2M832	60	1650	16.8	600	1000	100	45	17	25	12	1.2	DFN832 (D1)

* Advance information

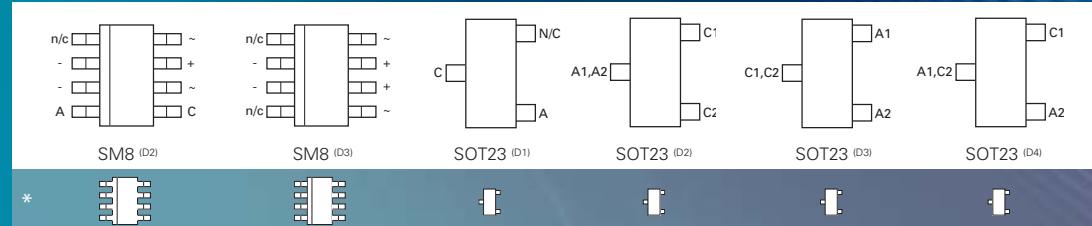


* Indicative relative size

Multiple Schottky diodes →


Part number	V_{RMS}	I_F (av)	I_{FSM}	V_F		I_R		C_D @ $f = 1MHz$	t_{rr} (typ)	P_D	Package
	Max. V	Max. A	Max. A	Max. mV	@ I_F mA	Max. μA	@ V_R V	Typ. pF			
Schottky bridge rectifier with additional free wheeling diode											
ZXSBMR16PT8	13.2	0.4	13	550	500	10	30	16	30	3	1.0
Schottky bridge rectifier											
ZXSB1000QT8*	17	1.0	5	560	1000	20	30	26	30	4	2.0

*Advance information

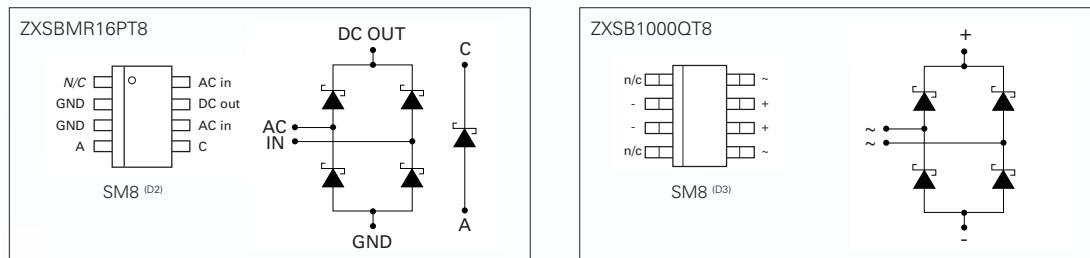

12 volt hyperabrupt varactor diodes →

Part number	Capacitance $V_R = 1V$, $f = 1MHz$		Capacitance $V_R = 2.5V$, $f = 1MHz$		Capacitance $V_R = 4V$, $f = 1MHz$		Q $V_R = 4V$, $f = 50MHz$	Package
	Min. pF	Max. pF	Min. pF	Max. pF	Min. pF	Max. pF		
ZC930	8.7	4.3	4.3	5.5	2.9	2.9	200	SOT23 (D1)
ZMV930	8.7	4.3	4.3	5.5	2.9	2.9	200	SOD323 (D1)
ZC931	13.5	6.5	6.5	7.8	4	4	300	SOT23 (D1)
ZMV931	13.5	6.5	6.5	7.8	4	4	300	SOD323 (D1)
ZC932	17	8.5	8.5	10.5	5.5	5.5	200	SOT23 (D1)
ZMV932	17	8.5	8.5	10.5	5.5	5.5	200	SOD323 (D1)
ZMV933	42	18	18	27	12	12	150	SOD323 (D1)
ZMV933A	42	20.25	20.25	24.75	12	12	150	SOD323 (D1)
ZC933	42	18	18	27	12	12	150	SOT23 (D1)
ZC933A	42	20.25	20.25	24.75	12	12	150	SOT23 (D1)
ZC934	95	40	40	65	25	25	80	SOT23 (D1)
ZC934A	95	47.25	47.25	57.75	25	25	80	SOT23 (D1)
ZMV934	95	40	40	65	25	25	80	SOD323 (D1)
ZMV934A	95	47.25	47.25	57.75	25	25	80	SOD323 (D1)

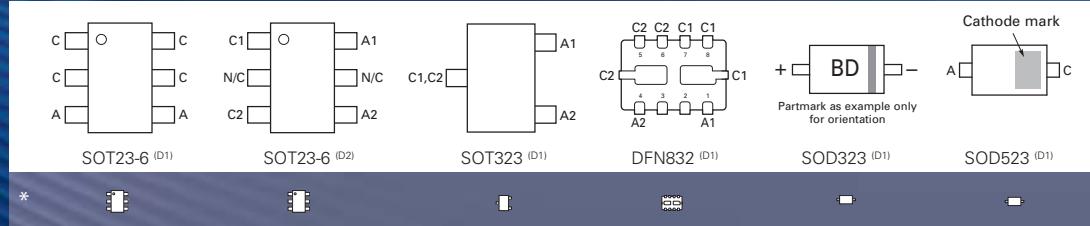

* Indicative relative size

25 volt hyperabrupt varactor diodes ➔

Part number	Capacitance $V_R = 2V, f = 1MHz$		Capacitance $C_2/C_{20}, f = 1MHz$		Q $V_R = 3V, f = 50MHz$	Package
	Min. pF	Max. pF	Min.	Max.		
ZC831B	14.25	15.75	4.5	6	300	SOT23 (D1)
ZC832B	20.9	23.1	5	6.5	200	SOT23 (D1)
ZC833B	31.35	34.65	5	6.5	200	SOT23 (D1)
ZC834B	44.65	49.35	5	6.5	200	SOT23 (D1)
ZC835B	64.6	71.4	5	6.5	100	SOT23 (D1)
ZC836B	95	105	5	6.5	100	SOT23 (D1)
ZMV832B	20.9	23.1	5	6.5	200	SOD323 (D1)
ZMV833B	31.35	34.65	5	6.5	200	SOD323 (D1)

Rectifier diodes

Part number	V_{RRM} Max. V	$I_{F(AV)}$ Max. A	I_{FSM} Max. A	V_F		$I_R @ V_{RRM}$ Max. mA	Package
				Max. V	@ I_f A		
BYY57/58	75...1500	35	600	1.15	35	0.25	Hermetic press-fit
BYY57A/58A	75...800	50	900	1.15	50	0.25	Hermetic press-fit
BYP53/54	75...800	25	425	1.1	25	0.25	Press-fit with plastic cover
BYP57/58	75...800	35	600	1.1	35	0.25	Press-fit with plastic cover
BYY53/54	75...1500	25	425	1.1	25	0.25	Hermetic press-fit

Power zener diodes

Part number	V_z Typ V	$I_{F(AV)}$ Max. A	I_{FSM} Max. A	$V_F @$		I_z Max. A	Package
				Max. V	@ I_f A		
BZP61/62	22 / 27 / 33 / 39	35	600	1.1	35	5.5 / 4.5 / 3.8 / 3.3	Press-fit with plastic cover
BZP63/64	22 / 27 / 33 / 39	50	700	1.1	35	6.3 / 5.2 / 4.3 / 3.8	Press-fit with plastic cover
BZV61/62	22 / 27 / 33 / 39	35	600	1.1	35	7.2 / 5.8 / 4.8 / 4.2	Hermetic press-fit
BZV63/64	22 / 27 / 33 / 39	50	700	1.1	35	8.1 / 6.6 / 5.5 / 4.8	Hermetic press-fit

Rectifier stacks

Part number	V_{IN} Max. V	$I_{d(AV)}$ Max. A	V_{OUT} Max. V	Package
Rectifier stacks	1000	2400	1300	100mm x 125mm cooling plate 100mm x 250mm cooling plate 100mm x 375mm cooling plate 100mm x 500mm cooling plate

Back-off diodes

Part number	Drop voltage Max. V	I_{FAVM} Max. A	Package
Back-off diodes	0.8...33.2	25...100 ⁽¹⁾	100mm x 125mm cooling plate 100mm x 250mm cooling plate 100mm x 375mm cooling plate 100mm x 500mm cooling plate

(1) Higher current values are possible with parallel connecting



* Indicative relative size

MOSFETs

Section 3.0

Zetex' MOSFET portfolio is comprised of N and P-channel parts, with a wide variety of voltages up to 450V for use in a broad range of end products from portable equipment to power supplies, covering automotive, consumer and industrial markets.

The diverse range of high efficiency power and signal management devices featured within this section includes parts derived from both planar and trench technology with drive capability down to 1.8V, avalanche rated devices and self-protected IntelliFET™ parts.

By utilizing the strengths of each, Zetex can provide optimized MOSFET performance appropriately tailored to specific application areas including DC-DC conversion, motor drive, audio Class D output stages, backlight inverters, active clamping, power supply start up and power line disconnect.



Contents

20V devices

N-channel	42
P-channel	42
Complementary	43

30 to 50V devices

N-channel	43
P-channel	44
Complementary	44
H-bridge	44

60 to 70V devices

N-channel	45
P-channel	46
Complementary	46
H-bridge	46
Self-protected IntelliFET™	47

80 to 100V devices


N-channel	48
P-channel	49
H-bridge	49

150 to 450V devices

N-channel	49
P-channel	50



N-channel 20V





Part number	Polarity	BV_{DSS}	I_D	P_D	$R_{DS(on)}$ max. @				C_{iss} typ. @	Q_g typ. @	Package
					$V_{GS} = 1.8V$	$V_{GS} = 2.5V$	$V_{GS} = 2.7V$	$V_{GS} = 4.5V$			
ZXMN2A04DN8	2 x N	20	7.7	2.1		0.04	-	0.025	1880	40.5	SO8 (M2)
ZXMN2A02X8	N	20	7.6	1.8		0.04	-	0.02	2050	18.9	MSOP8 (M1)
ZXM64N02X	N	20	5.4	1.8		-	0.05	0.04	1100	12.5	MSOP8 (M1)
ZXMN2A03E6	N	20	4.6	1.7		0.1	-	0.055	837	8.2	SOT23-6 (M1)
ZXMN2B03E6	N	20	4.3	1.1	0.075	0.055		0.04	1160	1.5	SOT23-6 (M1)
ZXMN2A14F	N	20	4.1	1		0.11	-	0.06	544	6.6	SOT23 (M1)
ZXMN2F30FH	N	20	3.6	1	-	0.065	-	0.045	330	5.8	SOT23 (M1)
ZXMN2B14FH	N	20	3.5	1	0.1	0.075		0.055	872	11	SOT23 (M1)
ZXMN2F34FH	N	20	3.0	1	-	0.120	-	0.060	641		SOT23 (M1)
ZXMN2F34MA	N	20	5.1	2.2	-	0.12	-	0.06	277	2.8	DFN322
ZXM62N02E6	N	20	3.2	1.7		-	0.125	0.1	480	5	SOT23-6 (M1)
ZXMN2A01E6	N	20	3	1.7		0.225	-	0.12	299	3.1	SOT23-6 (M1)
ZXMN2AM832	2 x N	20	3	1.5		0.225	-	0.12	310	3.1	DFN832 (M1)
ZXMD63N02X	2 x N	20	2.4	1.25		-	0.15	0.13	360	4.8	MSOP8 (M2)
ZXMN20866DE6	2 x N	20	1.8	1.5	0.5	0.4	-	0.3	230	3.0	SOT23 (M2)
ZXMN2B01F	2 x N	20	1.8	1.5	-	0.15		0.1	230	3	SOT23 (M2)
ZXMN2A01F	N	20	2	0.8		0.225	-	0.12	310	3	SOT23 (M1)
ZXM61N02F	N	20	1.7	0.8		-	0.24	0.18	170	2.6	SOT23 (M1)

P-channel 20V




Part number	Polarity	BV_{DSS}	I_D	P_D	$R_{DS(on)}$ max. @			C_{iss} typ. @	Q_g typ. @	Package
					$V_{GS} = -2.5V$	$V_{GS} = -2.7V$	$V_{GS} = -4.5V$			
ZXM64P02X	P	-20	-3.5	1.8	-	0.13	0.09	950	5	MSOP8 (M1)
ZXM62P02E6	P	-20	-2.3	1.7	-	0.375	0.2	340	4.6	SOT23-6 (M1)
ZXMD63P02X	2 x P	-20	-1.7	1.25	-	0.4	0.27	300	4.1	MSOP8 (M2)
ZXM61P02F	P	-20	-0.9	0.8	-	0.9	0.6	160	2.7	SOT23 (M1)

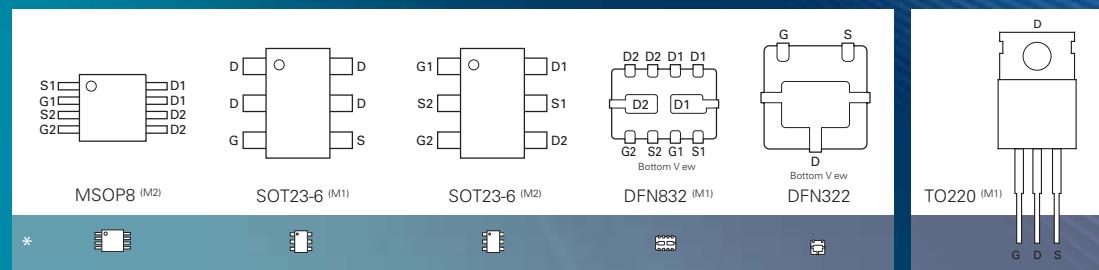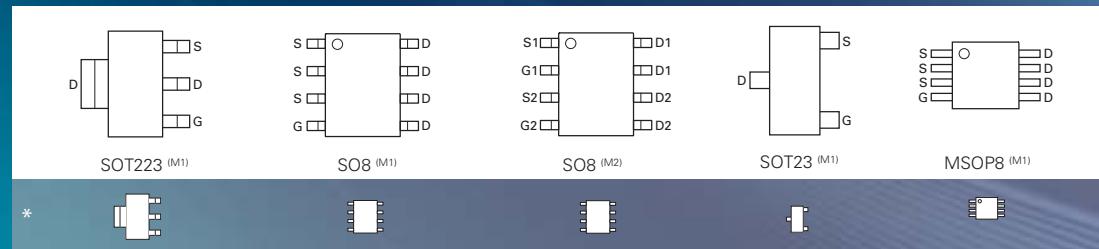


* Indicative relative size

Complementary 20V



N-channel from 30 to 50V



Part number	Polarity	BV_{DSS}	I_D	P_D	$R_{DS(on)}$ max. @				C_{iss} typ. @	Q_g typ. @	Q_g typ. @	Package
					$V_{GS} = 2.5V$	$V_{GS} = 4.5V$	$V_{GS} = 5V$	$V_{GS} = 10V$				
ZXMD63C02X	N + P	20 -20	2.4 -1.7	1.25	0.15 0.4	0.13 0.27	360 300	4.8 4.1	MSOP8 (M3)			
ZXMN3A04K	N	30	18.4	10.1	-	0.03	-	0.02	1890	-	36.8	DPAK (M1)
ZXMN3A04DN8	2 x N	30	8.5	2.1	-	0.03	-	0.02	1890	36.8	-	SO8 (M2)
ZXMN3F31DN8	2 x N	30	7.0	2.1	-	0.046	-	0.024	742	-	16.4	SO8 (M2)
ZXMN3F318DN8*	2 x N	30	7.0 6.0	2.1	- -	0.046 0.055	- -	0.024 0.035	742 -	- -	16.4 8.8	SO8 (M2)
ZXMN3A02X8	N	30	6.7	1.8	-	0.035	-	0.025	1400	-	26.8	MSOP8 (M1)
ZXMN3A06DN8	2 x N	30	6.2	2.1	-	0.05	-	0.035	750	-	17.5	SO8 (M2)
ZXMN3G32DN8	2 x N	30	6.0	2.1	-	0.042	-	0.028	740	-	6.5	SO8 (M2)
ZXM62N03G	N	30	4.7	3.9	-	0.15	-	0.11	380	-	9.6	SOT223 (M1)
ZXMN3A03E6	N	30	4.6	1.7	-	0.065	-	0.05	600	-	12.6	SOT23-6 (M1)
ZXMN3F30FH	N	30	4.0	1	-	0.065	-	0.047	305	-	9.1	SOT23 (M1)
ZXMN3A14F	N	30	3.9	1	-	0.095	-	0.065	448	-	8.6	SOT23 (M1)
ZXMN3B14F	N	30	3.5	1	0.14	0.08	-	-	568	-	6.7	SOT23 (M1)
ZXMN3A01E6	N	30	3	1.7	-	0.18	-	0.12	190	-	3.9	SOT23-6 (M1)
ZXMN3AM832	2 x N	30	3	1.5	-	0.18	-	0.12	190	-	3.9	DFN832 (M1)
ZXMD63N03X	2 x N	30	2.3	1.25	-	0.2	-	0.135	300	-	6.1	MSOP8 (M2)
ZXMN3A01F	N	30	2	0.625	-	0.18	-	0.12	190	-	3.9	SOT23 (M1)
ZXMN3B01F	N	30	2	0.625	0.24	0.15	-	-	258	-	2.9	SOT23 (M1)
ZXM61N03F	N	30	1.4	0.625	-	0.3	-	0.22	160	-	3.2	SOT23 (M1)
ZXM64N035L3	N	35	13	20	-	0.07	-	0.06	970	-	22	TO220 (M1)
ZXMN4A06K	N	40	10.9	9.5	-	0.075	-	0.05	810	-	17.1	DPAK (M1)
ZXMN4A06G	N	40	7	3.9	-	0.075	-	0.05	810	-	18.2	SOT223 (M1)
BSS138	N	50	0.2	0.36	-	-	3.5	-	35	-	-	SOT23 (M1)

*Advance information

P-channel from 30 to 50V



Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @			C_{iss} typ. @ $V_{DS} = -15V$ pF	Q_g typ. @ $V_{GS} = -10V$ nC	Package
					$V_{GS} = -4.5V$ Ω	$V_{GS} = -5V$ Ω	$V_{GS} = -10V$ Ω			
ZXMP3G35N8*	P	-30	-14.0	2.5	0.018	-	0.0125	3625	55.0	SO8 (M1)
ZXMP3F36N8*	P	-30	-10.0	2.5	0.028	-	0.020	2530	41.0	SO8 (M1)
ZXMP3A16G	P	-30	-7.5	2	0.07	-	0.045	970	24.9	SOT223 (M1)
ZXMP3F37DN8*	2 x P	-30	-7.1	2.1	0.041	-	0.025	1550	31.0	SO8 (M2)
ZXMP3A16N8	P	-30	-6.7	2.5	0.07	-	0.04	970	24.9	SO8 (M1)
ZXMP3A16DN8	2 x P	-30	-5.5	2.1	0.07	-	0.045	970	24.9	SO8 (M2)
ZXMP3A17DN8	2 x P	-30	-4.4	2.1	0.11	-	0.07	630	15.8	SO8 (M2)
ZXM62P03G	P	-30	-4	3.9	0.23	-	0.15	330	10.2	SOT223 (M1)
ZXMP3A17E6	P	-30	-4	1.7	0.11	-	0.07	630	15.8	SOT23-6 (M1)
ZXM64P03X	P	-30	-3.8	1.8	0.1	-	0.075	875	37	MSOP8 (M1)
ZXMP3F30FH*	P	-30	-3.0	1	0.130	-	0.078	565	8.8	SOT23 (M1)
ZXM62P03E6	P	-30	-2.6	1.7	0.23	-	0.15	350	8	SOT23-6 (M1)
ZXMD63P03X	2 x P	-30	-2	1.25	0.27	-	0.185	280	5.4	MSOP8 (M2)
ZXMP3A13F	P	-30	-1.6	0.8	0.33	-	0.21	204	5.2	SOT23 (M1)
ZXM61P03F	P	-30	1	0.8	0.55	-	0.35	145	3.7	SOT23 (M1)
ZXM64P035L3	P	-35	-12	20	0.105	-	0.075	875	37	TO220 (M1)
ZXMP4A16K	P	-40	-9.9	9.5	0.1	-	0.06	1000	29.6	DPAK (M1)
ZXMP4A16G	P	-40	-6.4	3.9	0.1	-	0.06	1010	26.1	SOT223 (M1)
BS250P	P	-45	-0.23	0.7	-	-	14	60	1.6	E-Line (M1)
BS250F	P	-45	-0.09	0.33	-	-	14	30	0.75	SOT23 (M1)
ZVP4105A	P	-50	-0.18	0.625	-	10	-	-	-	E-Line (M1)
BSS84	P	-50	-0.13	0.36	-	10	-	-	-	SOT23 (M1)

* Advance information

Complementary 30 to 40V



Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ. @ $V_{DS} = 15V$ pF	Q_g typ. @ $V_{GS} = 10V$ nC	Package
					$V_{GS} = 4.5V$ Ω	$V_{GS} = 10V$ Ω			
ZXMC3F31DN8*	N + P	30 -30	7.0 -4.5	2.1	0.046 0.080	0.024 0.046	742 820	16.4 15.2	SO8 (M3)
ZXMC3A17DN8	N + P	30 -30	5.4 -4.4	2.1	0.065 0.11	0.05 0.07	600 630	12.2 15.8	SO8 (M3)
ZXMC3AM832	N + P	30 -30	3.7 -2.7	1.5	0.18 0.33	0.12 0.21	190 204	3.9 5.2	DFN832 (M2)
ZXMD63C03X	N + P	30 -30	2.3 -2	1.25	0.2 0.27	0.135 0.185	300 280	6.1 5.4	MSOP8 (M3)
ZXMC4A16DN8	N + P	40 -40	5.2 -4.7	2.1	0.075 0.1	0.05 0.06	800 1010	17 26	SO8 (M3)

* Advance information

H-bridge 30V



Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ. @ $V_{DS} = 15V$ pF	Q_g typ. @ $V_{GS} = 10V$ nC	Package
					$V_{GS} = 4.5V$ Ω	$V_{GS} = 10V$ Ω			
ZXMH3A01T8	2 x N 2 x P	30 -30	3.1 -2.3	1.7	0.18 0.33	0.12 0.21	190 204	3.9 5.2	SM8 (M1)

N-channel from 60 to 70V



Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @			C_{iss} typ. @ $V_{DS} = 30V$ pF	Q_g typ. @ $V_{GS} = 10V$ nC	Package
					$V_{GS} = 4.5V$ Ω	$V_{GS} = 5V$ Ω	$V_{GS} = 10V$ Ω			
ZXMN6A09K	N	60	11.2	10.1	0.06	-	0.04	1426	29	DPAK (M1)
ZXMN6A25K	N	60	7	4.2	0.07	-	0.05	1063	20.4	DPAK (M1)
ZXMN6A09G	N	60	5.1	3.8	0.06	-	0.04	1410	24	SOT223 (M1)
ZXMN6A09DN8	2 x N	60	5.1	2.1	0.06	-	0.04	1410	24	SO8 (M2)
ZXMN6A25N8*	N	60	5.7	2.5	0.07	-	0.05	1063	20.4	SO8 (M1)
ZXMN6A25G	N	60	4.8	2	0.07	-	0.05	1063	20.4	SOT223 (M1)
ZXMN6A25DN8	2 x N	60	4.7	2.1	0.07	-	0.05	1063	20.4	SO8 (M2)
ZXMN6A08G	N	60	3.8	3.9	0.15	-	0.08	470	5.8	SOT223 (M1)
ZXMN6A11G	N	60	3.8	3.9	0.18	-	0.12	330	5.7	SOT223 (M1)
ZXMN6A11Z	N	60	3.2	1.5	0.18	-	0.12	330	5.7	SOT89 (M1)
ZXMN6A08E6	N	60	3.1	1.7	0.15	-	0.08	459	5.8	SOT23-6 (M1)
ZXMN6A11DN8	2 x N	60	2.7	2.1	0.18	20.4	0.12	330	5.7	SO8 (M2)
ZXMN6A07Z	N	60	2.2	1.5	0.35	-	0.25	166	3.2	SOT89 (M1)
ZVN4306G	N	60	2.1	3	-	0.45	0.33	220	5.2	SOT223 (M1)
ZVN4306GV*	N	60	2.1	3	-	0.45	0.33	220	5.2	SOT223 (M1)
ZXMN6A07F	N	60	1.2	0.8	0.35	-	0.25	166	3.2	SOT23 (M1)
ZVN4306A	N	60	1.1	1.1	-	0.45	0.33	220	5.2	E-Line (M1)
ZVN4306AV†	N	60	1.1	1.1	-	0.45	0.33	220	5.2	E-Line (M1)
ZVN4206G	N	60	1	2	-	1.5	1	70	2.4	SOT223 (M1)
ZVN4206GV†	N	60	1	2	-	1.5	1	70	2.4	SOT223 (M1)
ZVN2106G	N	60	0.71	2	-	-	2	50	1.6	SOT223 (M1)
ZVN4206A	N	60	0.6	0.7	-	1.5	1	70	2.4	E-Line (M1)
ZVN4206AV†	N	60	0.6	0.7	-	1.5	1	70	2.4	E-Line (M1)
ZVN2106A	N	60	0.45	0.7	-	-	2	50	1.6	E-Line (M1)
VN10LP	N	60	0.27	0.625	-	7.5	5	30	0.95	E-Line (M1)
ZVN3306A	N	60	0.27	0.625	-	-	5	30	0.95	E-Line (M1)
ZVN4106F	N	60	0.2	0.33	-	5	2.5	27	1	SOT23 (M1)
ZVN3306F	N	60	0.15	0.33	-	-	5	30	0.95	SOT23 (M1)
2N7002	N	60	0.115	0.33	-	-	3.75	27	1	SOT23 (M1)
ZXMN7A11K	N	70	6.1	8.5	0.19	-	0.13	300	7.4	DPAK (M1)
ZXMN7A11G	N	70	3.8	3.9	0.19	-	0.13	300	7.4	SOT223 (M1)

†Avalanche rated product *Advance information

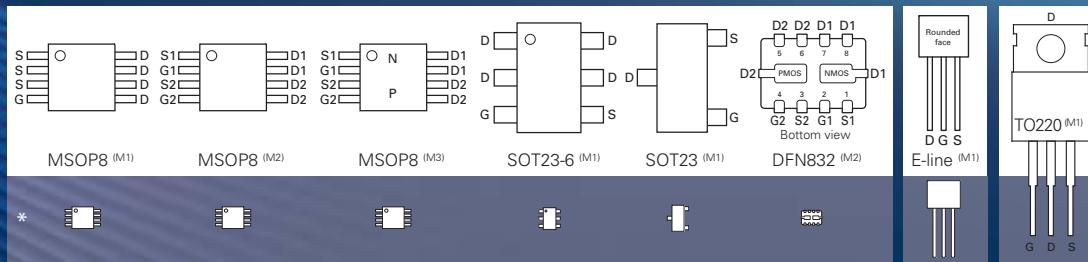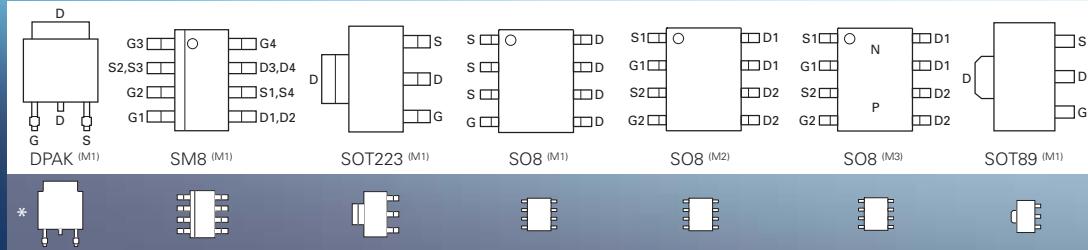


*Indicative relative size

P-channel from 60 to 70V



Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ.@ $V_{DS} = -30V$ pF	Q_g typ.@ $V_{GS} = -10V$ nC	Package
					$V_{GS} = -4.5V$ Ω	$V_{GS} = -10V$ Ω			
ZXMP6A18K	P	-60	-10.4	10.1	0.08	0.055	1580	44	DPAK (M1)
ZXMP6A16K	P	-60	-5.4	4.24	0.13	0.085	1021	24.2	DPAK (M1)
ZXMP6A18DN8	2 x P	-60	-4.8	2.1	0.08	0.055	1580	44	SO8 (M2)
ZXMP6A17G	P	-60	-4.1	3.9	0.19	0.125	637	17.7	SOT223 (M1)
ZXMP6A16DN8	2 x P	-60	-3.9	2.1	0.125	0.085	1021	24.2	SO8 (M2)
ZXMP6A17DN8	2 x P	-60	-3.2	2.1	0.19	0.125	637	17.7	SO8 (M2)
ZXMP6A17E6	P	-60	-3	1.7	0.19	0.125	637	17.7	SOT23-6 (M1)
ZXMP6A13G	P	-60	-2.3	3.9	0.595	0.39	233	5.1	SOT223 (M1)
ZXMP6A13F	P	-60	-1.1	0.8	0.6	0.4	233	5.1	SOT23 (M1)
ZVP2106G	P	-60	-0.45	2	-	5	55	1.7	SOT223 (M1)
ZVP2106A	P	-60	-0.28	0.7	-	5	55	1.7	E-Line (M1)
ZVP3306A	P	-60	-0.16	0.625	-	14	27	0.9	E-Line (M1)
ZVP3306F	P	-60	-0.09	0.33	-	14	27	0.9	SOT23 (M1)
ZXMP7A17K	P	-70	-5.7	9.25	0.25	0.16	650	18	DPAK (M1)
ZXMP7A17G	P	-70	-3.7	3.9	0.25	0.16	650	18	SOT223 (M1)


Complementary 60V



Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ.@ $V_{DS} = 30V$ pF	Q_g typ.@ $V_{GS} = 10V$ nC	Package
					$V_{GS} = 4.5V$ Ω	$V_{GS} = 10V$ Ω			
ZXMC6A09DN8	N + P	60 -60	5.1 -4.8	2.1	0.06 0.08	0.04 0.055	1410 1580	24 44	SO8 (M3)
ZXMC4559DN8	N + P	60 -60	4.7 -3.9	2.1	0.075 0.125	0.055 0.085	1063 1021	20.4 24.2	SO8 (M3)

H-bridge 60V

Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ.@ $V_{DS} = 30V$ pF	Q_g typ.@ $V_{GS} = 10V$ nC	Package
					$V_{GS} = 4.5V$ Ω	$V_{GS} = 10V$ Ω			
ZXMHC6A07T8	2 x N 2 x P	60 -60	1.8 -1.5	1.7	0.35 0.63	0.25 0.425	166 233	3.2 5.1	SM8 (M1)
ZXMHN6A07T8	4 x N	60	1.6	1.25	0.35	0.25	166	3.2	SM8 (M2)

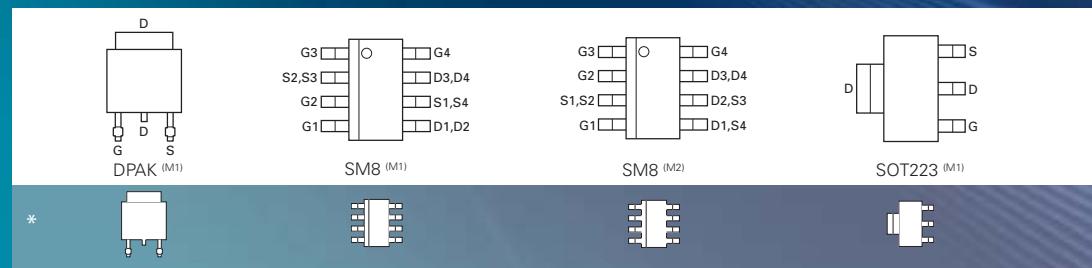

* Indicative relative size

60V N-channel self-protected IntelliFET™


Part number	Additional Function	TAB	$\text{BV}_{\text{DS(on)}}$	I_{D}	P_{D}	$R_{\text{DS(on) max.}}$ @			$V_{\text{DS(S/C)}}^{(1)}$	$E_{\text{AS}}^{(2)}$	$T_{\text{JT}}^{(3)}$	Package
						$V_{\text{IN}} = 5\text{V}$	$V_{\text{IN}} = 3\text{V}$	$V_{\text{IN}} = 5\text{V}$	$V_{\text{IN}} = 10\text{V}$			
BSP75G	Improved power dissipation	D	60	1.4	2.5	–	675	550	36	550	150	SOT223 (M2)
ZXMS6002G	with status flag	D	60	1.4	2.5	–	675	550	36	550	150	SOT223 (M3)
ZXMS6003G	with status and programmable current limit	D	60	1.4	2.5	–	675	550	36	550	150	SOT223 (M3)
ZXMS6005G*	BSP75N pin out	S	60	1.3	1.5	600	500	–	36	550	150	SOT223 (M4)
ZXMS6004FF*	High power SOT23	–	60	1.3	1.5	600	500	–	36	550	150	SOT23F
BSP75N	BSP75N pin out	S	60	1.2	1.5	–	675	550	36	550	150	SOT223 (M4)
ZXMS6001G	500µA input current	S	60	1.1	1.5	2000	675	–	36	550	150	SOT223 (M4)

*Advance information

(1) Maximum drain source voltage during short circuit conditions


(2) Unclamped single pulse inductive energy absorption

(3) Thermal overload trip temperature

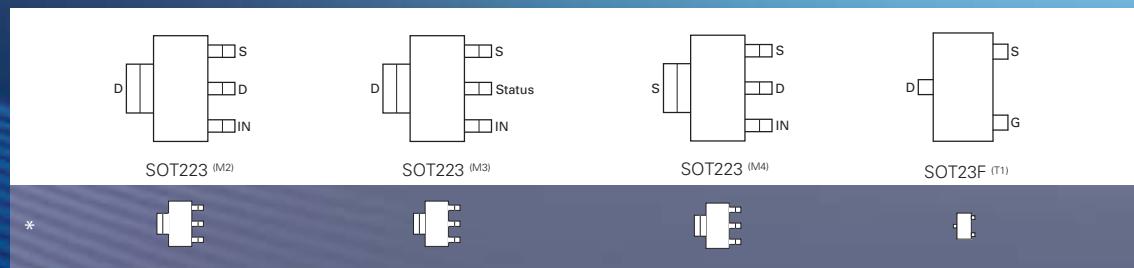


*Indicative relative size

N-channel from 80 to 100V




Part number	Polarity	BV_{DS}	I_b	P_d	$R_{DS(on)}$ max. @					C_{iss} typ. @ $V_{DS}=50V$ pF	Q_g typ. @ $V_{GS}=10V$ nC	Package	
					V A	W Ω	$V_{GS}=3V$ Ω	$V_{GS}=4.5V$ Ω	$V_{GS}=5V$ Ω	$V_{GS}=6V$ Ω	$V_{GS}=10V$ Ω		
ZXMN10A09K	N	100	7.7	10.1	-	-	-	-	0.1	0.085	1313	26	DPAK (M1)
ZXMN10A25K	N	100	4.2	4.2	-	-	-	-	0.15	0.125	859	17	DPAK (M1)
ZXMN10A25G	N	100	2.9	2	-	-	-	-	0.15	0.125	859	17	SOT223 (M1)
ZXMN10A11K	N	100	2.4	4	-	-	-	-	0.45	0.35	274	5.4	DPAK (M1)
ZXMN10A11G	N	100	2.4	3.9	-	-	-	-	0.45	0.35	274	5.4	SOT223 (M1)
ZXMN10A08DN8	2 x N	100	2.1	1.8	-	-	-	-	0.3	0.25	405	7.7	SO8 (M2)
ZXMN10A08G	N	100	2	2	-	-	-	-	0.3	0.25	405	7.7	SOT223 (M1)
ZXMN10A08E6	N	100	1.9	1.7	-	-	-	-	0.3	0.25	405	7.7	SOT23-6 (M1)
ZXMN10B08E6	N	100	1.9	1.7	-	0.3	-	-	0.23	497	9.2	SOT23-6 (M1)	
ZVN4310G	N	100	1.67	3	-	-	0.75	-	0.54	200	6	SOT223 (M1)	
ZXMN10A07Z	N	100	1.4	1.5	-	-	-	-	0.9	0.7	138	2.9	SOT89 (M1)
ZVN4310A	N	100	0.9	1.1	-	-	0.65	-	0.5	200	6	E-Line (M1)	
ZVN4210G	N	100	0.8	2	-	-	1.8	-	1.5	65	2.7	SOT223 (M1)	
ZXMN10A07F	N	100	0.8	0.8	-	-	-	-	0.9	0.7	138	2.9	SOT23 (M1)
ZVNL110G	N	100	0.6	2	-	-	4.5	-	3	60	1.8	SOT223 (M1)	
ZVN2110G	N	100	0.5	2	-	-	-	-	4	60	1.8	SOT223 (M1)	
ZVN4210A	N	100	0.45	0.7	-	-	1.8	-	1.5	65	2.7	E-Line (M1)	
ZVN2110A	N	100	0.32	0.7	-	-	-	-	4	60	1.8	E-Line (M1)	
ZVNL110A	N	100	0.32	0.7	-	-	4.5	-	3	60	1.8	E-Line (M1)	
ZVN3310A	N	100	0.2	0.625	-	-	-	-	10	25	0.7	E-Line (M1)	
BSS123	N	100	0.17	0.36	-	-	-	-	6	25	0.7	SOT23 (M1)	
BSS123A	N	100	0.17	0.36	-	10	-	-	6	40	1.2	SOT23 (M1)	
ZXM41N10F	N	100	0.17	0.36	12	8	-	-	-	25	1.2	SOT23 (M1)	
ZVN3310F	N	100	0.1	0.33	-	-	-	-	10	25	0.7	SOT23 (M1)	

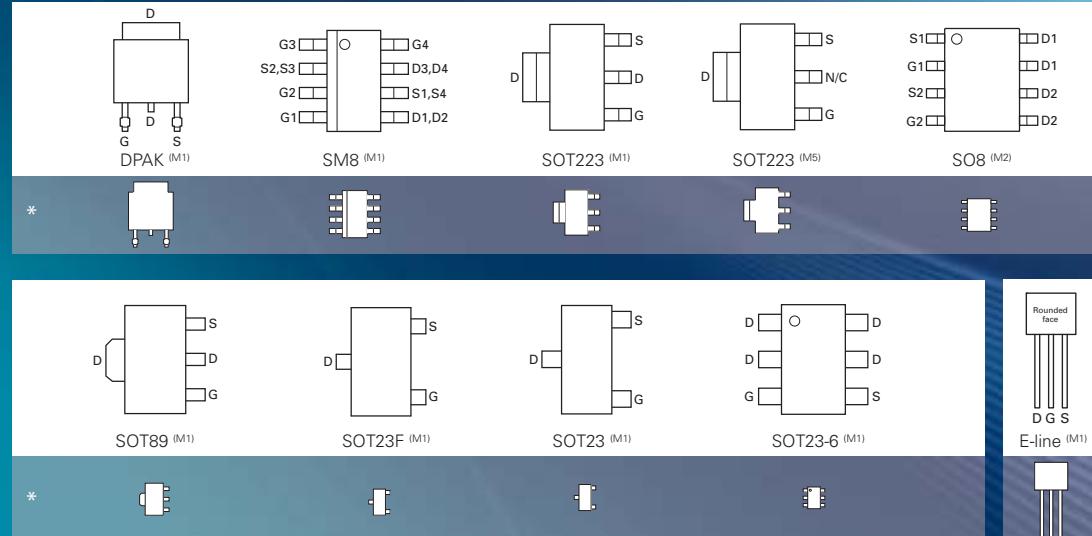


* Indicative relative size

P-channel from 80 to 100V




Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ. @ $V_{DS} = -50V$ pF	Q_g typ. @ $V_{GS} = -10V$ nC	Package
					$V_{GS} = -6V$ Ω	$V_{GS} = -10V$ Ω			
ZXMP10A18K	P	-100	-3.8	4.3	0.19	0.15	1055	27	DPAK (M1)
ZXMP10A18G	P	-100	-3.7	3.9	0.19	0.15	1055	26.9	SOT223 (M1)
ZXMP10A16K	P	-100	-3	4.24	0.29	0.235	717	16.5	DPAK (M1)
ZXMP10A17K	P	-100	-3.9	4.3	0.450	0.350	424	10.7	DPAK (M1)
ZXMP10A17E6	P	-100	-1.6	1.7	0.45	0.35	424	10.7	SOT23-6 (M1)
ZXMP10A13F	P	-100	-0.7	0.8	1.45	1	141	3.5	SOT23 (M1)
ZVP2110G	P	-100	-0.31	2	-	8	58	1.8	SOT223 (M1)
ZVP2110A	P	-100	-0.14	0.7	-	8	58	1.8	E-Line (M1)
ZVP3310A	P	-100	-0.14	0.625	-	20	20	0.7	E-Line (M1)
ZVP3310F	P	-100	-0.075	0.33	-	20	20	0.7	SOT23 (M1)

H-bridge from 80 to 100V




Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ. @ $V_{DS} = 60V$ pF	Q_g typ. @ $V_{GS} = 10V$ nC	Package
					$V_{GS} = 6V$ Ω	$V_{GS} = 10V$ Ω			
ZXMHC10A07T8	2 x N 2 x P	100 -100	1.4 -1.3	1.3	0.9 1.45	0.7 1	138 141	2.9 3.5	SM8 (M1)

N-channel from 150 to 450V





Part number	Polarity	BV_{DSS} V	I_D A	P_D W	$R_{DS(on)}$ max. @						C_{iss} typ. @ $V_{DS} = 50V$ pF	Q_g typ. @ $V_{GS} = 10V$ nC	Package	
					$V_{GS} = 2.4V$ Ω	$V_{GS} = 2.5V$ Ω	$V_{GS} = 2.6V$ Ω	$V_{GS} = 3V$ Ω	$V_{GS} = 5V$ Ω	$V_{GS} = 10V$ Ω				
ZVN2120G	N	200	0.32	2	-	-	-	-	-	-	10	58	2.2	SOT223 (M1)
ZVNL120G	N	200	0.32	2	-	-	-	-	10	10	-	58	2.2	SOT223 (M1)
ZVN2120A	N	200	0.18	0.7	-	-	-	-	-	-	10	58	2.2	E-Line (M1)
ZVNL120A	N	200	0.18	0.7	-	-	-	10	10	-	58	2.2	E-Line (M1)	
BS107P	N	200	0.12	0.5	-	-	23	-	30	-	58	2.7	E-Line (M1)	
ZVN3320A	N	200	0.1	0.625	-	-	-	-	-	25	-	-	E-Line (M1)	
ZVN3320F	N	200	0.06	0.33	-	-	-	-	-	25	-	-	SOT23 (M1)	
ZVN4424G	N	240	0.5	2.5	-	6	-	-	-	5.5	100	18	SOT223 (M1)	
ZVN4424A	N	240	0.26	0.75	-	6	-	-	-	5.5	100	18	E-Line (M1)	
ZVN4424Z	N	240	0.26	0.75	-	6	-	-	-	5.5	100	18	SOT89 (M1)	
ZVN0124A	N	240	0.16	0.7	-	-	-	-	-	16	62	1.4	E-Line (M1)	
ZVN4525G	N	250	0.31	2	9.5	-	-	-	-	8.5	72	2.5	SOT223 (M1)	
ZVN4525Z	N	250	0.24	1.2	9.5	-	-	-	-	8.5	72	2.5	SOT89 (M1)	
ZVN4525E6	N	250	0.23	1.1	9.5	-	-	-	-	8.5	72	2.5	SOT23-6 (M1)	
ZVN0545G	N	450	0.14	2	-	-	-	-	-	50	55	-	SOT223 (M1)	
ZXMN0545G4	N	450	0.14	2	-	-	-	-	-	50	55	-	SOT223 (M5)	
ZXMN0545FF	N	450	0.09	1.5	-	-	-	-	-	50	55	-	SOT23F (M1)	
ZVN0545A	N	450	0.09	0.7	-	-	-	-	-	50	55	-	E-Line (M1)	

P-channel from 150 to 450V



Part number	Polarity	BV_{DSS} V	I_b A	P_D W	$R_{DS(on)}$ max. @		C_{iss} typ. @ $V_{DS} = -50V$ pF	Q_g typ. @ $V_{GS} = -10V$ nC	Package
					$V_{GS} = -3.5V$ Ω	$V_{GS} = -10V$ Ω			
ZVP2120G	P	-200	-0.3	2	-	25	65	1.6	SOT223 (M1)
ZXMP2120G4	P	-200	-0.3	2	-	25	65	1.6	SOT223 (M5)
ZXMP2120FF	P	-200	-0.137	1	-	28	65	1.6	SOT23F (M1)
ZXMP2120E5	P	-200	-0.122	0.75	-	28	65	1.6	SOT23-5 (M1)
ZVP2120A	P	-200	-0.12	0.7	-	25	65	1.6	E-Line (M1)
ZVP1320F	P	-200	-0.035	0.33	-	80	28	2	SOT23 (M1)
ZVP4424G	P	-240	-0.48	2.5	11	9	100	3.7	SOT223 (M1)
ZVP4424Z	P	-240	-0.2	1	11	9	100	3.7	SOT89 (M1)
ZVP4424A	P	-240	-0.2	0.75	11	9	100	3.7	E-Line (M1)
ZVP4525G	P	-250	-0.265	2	18	14	75	2.5	SOT223 (M1)
ZVP4525Z	P	-250	-0.205	1.2	18	14	75	2.5	SOT89 (M1)
ZVP4525E6	P	-250	-0.197	1.1	18	14	75	2.5	SOT23-6 (M1)
ZVP0545G	P	-450	-0.075	2	-	150	-	-	SOT223 (M1)
ZVP0545A	P	-450	-0.045	0.7	-	150	-	-	E-Line (M1)

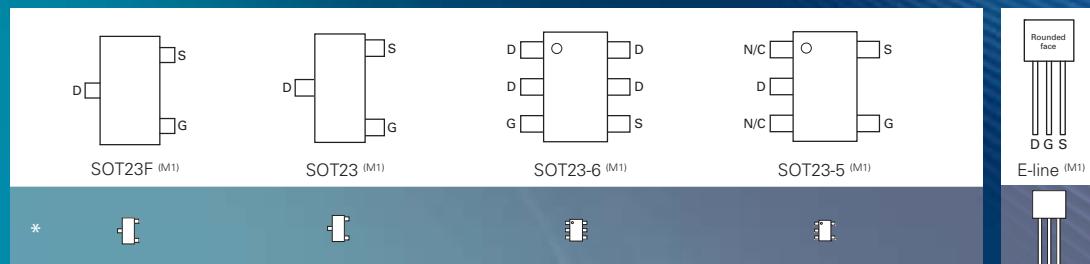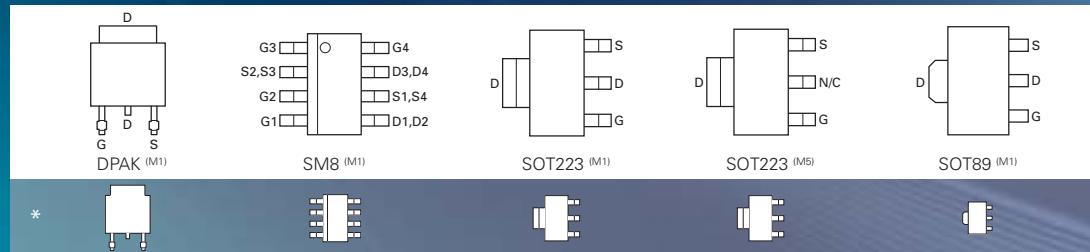

* Indicative relative size



Current monitors

Section 4.0

The increasing need to make more intelligent power management decisions requires accurate and reliable current monitoring. Dedicated current monitoring ICs from Zetex provide the reporting and protection functions to suit a range of power management applications.

Two output formats are offered: a versatile current output and a voltage output for greater simplicity and accuracy.

4.0
Current
monitors

Contents

Current output current monitors	54
Voltage output current monitors	56



Current output current monitors

ZXCT current monitors with a current output convert a high-side current measurement to a ground referred current output, thereby greatly simplifying high-sided current measurements. The devices enable gain to be set by a single external resistor.

The common-mode voltage of the monitored current can be substantially increased by the

addition of 1 or 2 transistors (see AN45 for more information).

Features

- High-side current sensing
- Output voltage scaling
- Up to 2.5V sense voltage
- 2.5V - 20V supply range
- 1% typical accuracy

Applications

- Over-current monitor
- Battery chargers
- Battery gauges
- Power management
- DC motor control

Part number	Description	V _{IN} V	Accuracy @ V _{SENSE} = 100mV %	Quiescent current µA	Gain output/V _{SENSE}	Bandwidth MHz	Package
ZXCT1008	Automotive temperature range micro-power current monitor	2.5 to 20 ⁽¹⁾	±2.5	4	10mA/V	2	SOT23
ZXCT1009	Micro-power current monitor	2.5 to 20 ⁽¹⁾	±2.5%	4	10mA/V	2	SM8 SOT23
ZXCT1010	Micro-power current monitor with improved offset	2.5 to 20	±2.5%	3.5	10mA/V	2	SOT23-5 ^A
ZXCT1011	Simple current monitor with improved temperature drift	2.5 to 20 ⁽¹⁾	±2.5%	4	10mA/V ⁽²⁾	1.5	SOT23-5 ^B
ZXCT1012	Reduced height micro-power current monitor	2.5 to 20	±2.5%	3.5	10mA/V	2	TDFN3x3-5 TSOT23-5
ZXCT1020	Low offset current monitor	2.5 to 20	±2%	25	Prog.	1	SOT23-5 ^D
ZXCT1050	Wide common-mode current monitor	2.5 to 20	±3%	50	Prog.	1	SOT23-5 ^C

⁽¹⁾ Relative to I_{OUT} ⁽²⁾ Gain with R_{SH} at 120Ω


Application notes

AN39 Current measurement applications handbook

AN45 High voltage current monitoring using the ZXCT1009 and ZXCT1010 in power supplies


AN46 The use of Zetex current monitors with the Polyswitch™ overcurrent device

Connection diagrams

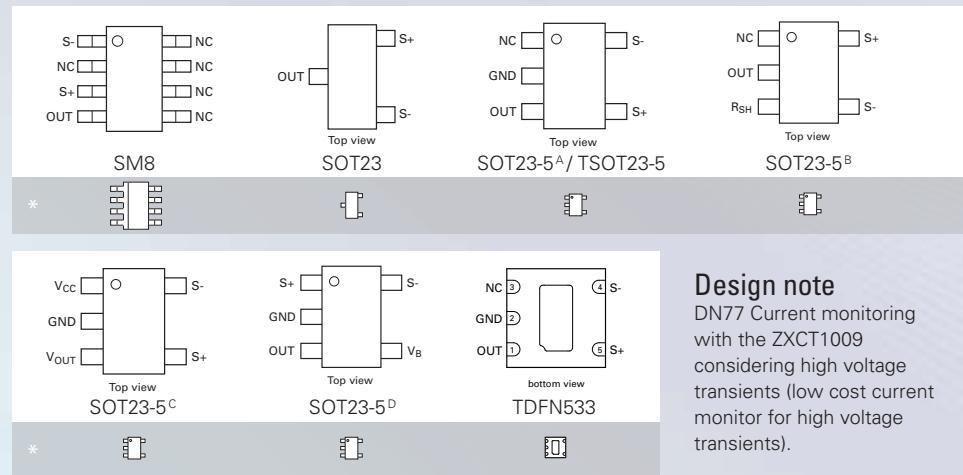


Design note

DN77 Current monitoring with the ZXCT1009 considering high voltage transients (low cost current monitor for high voltage transients).

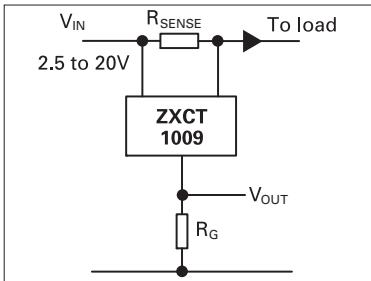

The ZXCT1008 and ZXCT1009 are the simplest of the current monitors. The output is a current which is proportional to the sense voltage, measured across a low value shunt resistor, R_{sense} . The output current can be converted to a voltage and scaled by choice of an appropriate resistor, R_{out} .


Quiescent current of only 4 μ A has minimal impact on system power efficiency. Operating voltage is from 2.5V to 20V, which makes these parts suitable for a wide range of applications.

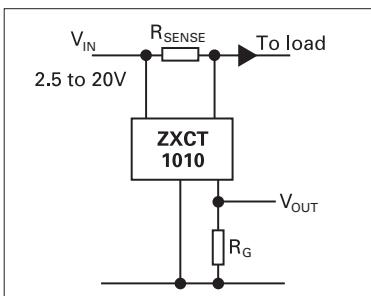

The ZXCT1010 and ZXCT1012 have the same characteristics as the ZXCT1009 but with a separate ground pin to avoid the circuit current flowing through the output resistor.


This reduces the current offset and improves accuracy particularly at lower sense voltages.

The ZXCT1012 has the same performance as the ZXCT1010 but in thinner packages.

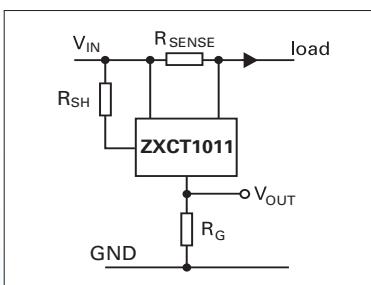


The ZXCT1011 uses an external resistor to determine its transconductance resulting in a much lower temperature coefficient.

This gives a better accuracy at temperature extremes without losing any of the parameters found in ZXCT1008/9 devices.

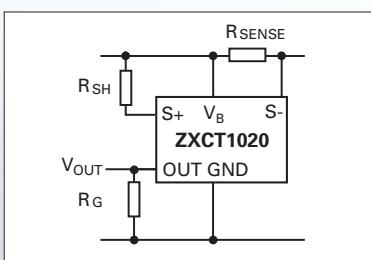

The ZXCT1020 uses an external resistor to set its transconductance and allows its offset to be trimmed. This increases the ZXCT1020 accuracy over the ZXCT1010 while maintaining the versatility of the ZXCT101.

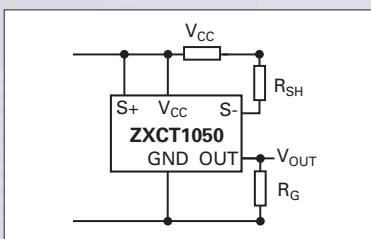

The ZXCT1050 is the current output version of the ZXCT1051. Two resistors are now off-chip; 1 sets the transconductance and other sets the gain.

Its offset is trimmed improving accuracy at small sense voltages

Voltage output current monitors

ZXCT current monitors with voltage output convert a high-side current measurement to a ground referred voltage output thereby greatly simplifying high-sided current measurements. The devices offer an internally set gain with low offset voltages and low temperature drift, which optimizes performance at low sense voltages.

Features

- High-side current sensing
- Output voltage scaling
- Up to 2.5V sense voltage
- 2.5V - 20V supply range
- 1% typical accuracy


Applications

- Over-current monitor
- Battery chargers
- Smart battery packs
- Power management
- DC motor control

Part number	Description	V _{IN} V	Accuracy @ V _{SENSE} = 100mV %	Quiescent current μA	Gain output/V _{SENSE}	Bandwidth MHz	Package
ZXCT1021	Voltage output	2.5 to 20	±2%	25	10V/V	1	SOT23-5 ^A
ZXCT1022	Voltage output	2.5 to 20	±3%	25	100V/V	1	SOT23-5 ^A
ZXCT1030	Enhanced function with internal reference and comparator	2.5 to 20	±3%	270	10V/V	6	SO8 ^A
ZXCT1032	High side inrush current limit controller	9.5 to 21	—	1600	10V/V	—	SO8 ^B
ZXCT1041	Bidirectional voltage output with direction flag	2.7 to 20	±3%	35	10V/V	0.3	SOT23-5 ^B
ZXCT1051	Precision wide input range current monitor	0 to V _{CC} -2	±3%	50	10V/V	2	SOT23-5 ^C
ZXCT1080	High voltage High-Side Current Monitor	3 to 60	±3%	30	10V/V	0.5	SOT23-5 ^C
ZXCT1081	High voltage High-Side Current Monitor	3 to 40 ⁽¹⁾	±3%	30	10V/V	0.5	SOT23-5 ^C

⁽¹⁾ 60V transient


Connection diagrams

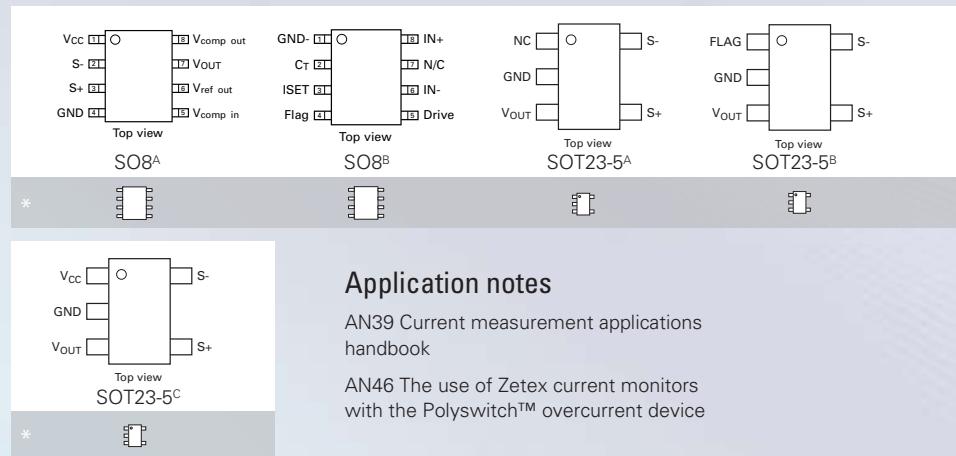

Application notes

AN39 Current measurement applications handbook


AN46 The use of Zetex current monitors with the Polyswitch™ overcurrent device

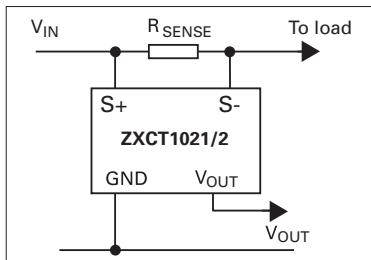


The ZXCT1021 and ZXCT1022 are voltage output current monitors, with fixed gain scaling.

$$V_{OUT} = \text{Gain} \times V_{SENSE}$$


The output is scaled internally by 10 on the ZXCT1021 and 100 on the ZXCT1022. This scaling allows low value sense resistors to be used, thus reducing power dissipation and voltage drop. The ZXCT1021 and ZXCT1022 are pin compatible with the ZXCT1010, which provides an easy upgrade path for improved performance.

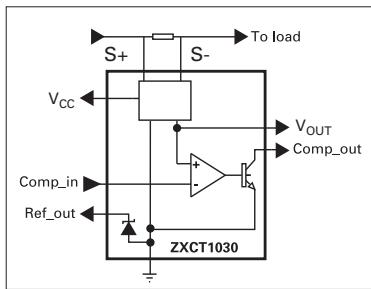


The ZXCT1030 is a voltage output current monitor with fixed gain scaling of 10. A non-latching output comparator and 1.24V voltage reference are also included on-chip to make more integrated solutions possible. Operating voltage range is 2.2V to 20V and quiescent current is only 270µA. A separate V_{CC} supply ensures the device gives an output under short circuit conditions. When the V_{S_+} and V_{S_-} falls below about 2.2V, then the comparator defaults to the asserted state. By feeding reference output to the comparator input a simple and compact over-current protection circuit can be developed.

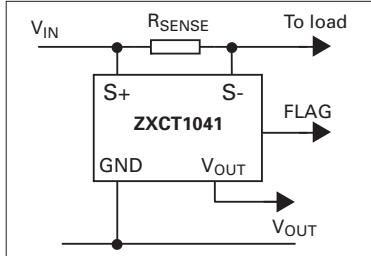

The ZXCT1041 is a bidirectional voltage output current monitor with direction flag. The flag is an open collector output enabling it to be coupled to a wide range of logic level voltages. The voltage output pin is analog and is internally scaled to 10 times V_{SENSE} . The ZXCT1041 operates from 2.7V to 20V enabling it to work in a wide range of applications including automotive, motor control and battery gas-gauging. Apart from its flag output the ZXCT1041 is pin compatible to the ZXCT1021.

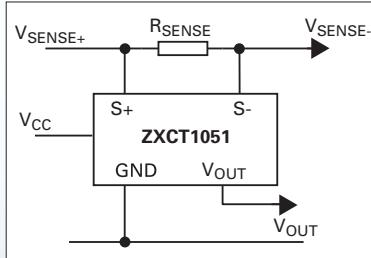


The ZXCT1051 is a wide common-mode range voltage output current monitor designed to measure at voltages ranging from under supply to ground. This makes the device suitable for systems which need to function under short circuit conditions. An auxiliary power supply is required to feed the device and keep the internal circuitry active. V_{CC} range is 20V to 3V and V_{S_+} is V_{CC} -2V to 0V. Supply current is 50µA and the performance is similar to the ZXCT1021, with internal gain setting of 10.

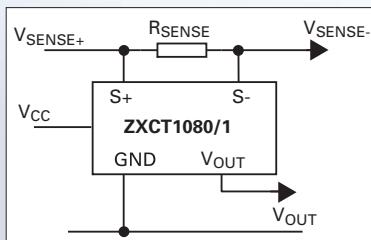

The ZXCT1081 has a wide continuous common-mode input range from 3V to 40V (60V transient). The ZXCT1080 extends the continuous common mode range to 60V. This allows it to measure currents in a wide range of applications ranging from computer power supplies to automotive.

A separate power supply pin provides power to an internal buffer lowering the output impedance

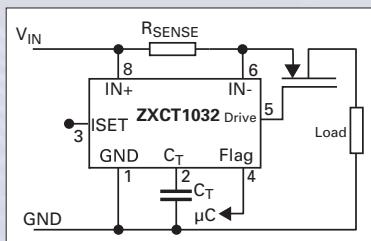

The ZXCT1032 provides in-rush current limiting and over current protection functions and when used with an external P-MOSFET behaves as an electronic fuse. At power up the load current is gradually increased; protecting input power supply from large capacitive loads. In over-current protection mode the device is transparent; just measuring the output current. When the over-current threshold is exceeded the device switches off the MOSFET protecting both the load and supply rail from damage. The ZXCT1032 will auto retry.

Voltage references

Section 5.0



The Zetex range of voltage reference devices significantly extends the performance of many industry standard parts. Offered in a choice of space saving packages, they provide the opportunity to reduce power consumption and increase operating temperature.

Contents

Shunt regulators	59
Micro-power voltage regulators	60
Industry standard references	61



Shunt regulators

These devices improve on industry standard products, notably their quiescent current is substantially lower than competitive alternatives. 2.5V devices are available as well as 1.24V for low voltage circuits. Industrial and extended temperature range devices are available. The ZTL range matches most TL431/2 specifications for applications where quiescent current is not critical.

Features

- No stabilizing capacitor required
- Min. knee current 50µA
- ±2.5%, 2% 1% and 0.5% (selected devices) tolerance
- Small outline SOT23 and SC70 packages
- Improved temperature coefficient

Applications

- Battery powered and portable equipment
- Metering and measurement systems
- Precision power supplies
- Switch mode power supplies

Part number	Operating temperature range °C	Reference voltage V	Min. output voltage V	Max. output voltage V	Min. cathode current µA	Max. cathode current mA	Tolerance @25°C ⁽¹⁾ %	Package
ZXRE060	-40 to 85	0.6	0.2	18	-	20	0.5, 1	SOT23 SC70-6
ZR431L	-40 to 85	1.24	1.24	10	100	25	1, 2.5	SOT23 ^A
TLV431	-40 to 125	1.24	1.24	18	100	15	0.1, 1	SOT23 ^A SC70-6 SOT23-5
ZHT431	-55 to 125	2.5	2.5	20	50	100	1, 2	SOT23 ^A
ZR431	-40 to 85	2.5	2.5	20	50	100	0.5, 1, 2	SOT223 SOT23 ^A
ZTL431	-40 to 125	2.5	2.5	20	1000	100	0.5, 1	SOT23 ^B SC70-6 SOT23-5
ZTL432 ⁽²⁾	-40 to 125	2.5	2.5	20	1000	100	0.5, 1	SOT23 ^A

⁽²⁾ Matches pinout of TL432 in SOT23


Application note AN27 ZR431 application note

ZTL competitive comparison

Part number	ZR431	ZTL431	TL431
Bandgap voltage		2.5V	
Initial tolerance	2, 1, 0.5%	1, 0.5%	2, 1, 0.5%
Operating voltage (max.)	20V	20V	36V
Min. operation current (typ.)	50µA (max.)	400µA	400µA
Operating current range	0.05 to 100mA	1 to 100mA	1 to 100mA
Temperature coefficient (max.)	55ppm/°C	50ppm/°C (typ.)	50ppm/°C (typ.)
Dynamic impedance (max.)	0.75Ω	0.75Ω	0.75Ω
Temperature range (max.)	-55 to 125°C	-40 to 125°C	-40 to 85°C
Packages	SOT23 and SOT223	SOT23, SC70-6, SOT23-5	SOT23, TO92 & SOT23-5

(Bold) denotes improvement of specification.

Connection diagrams

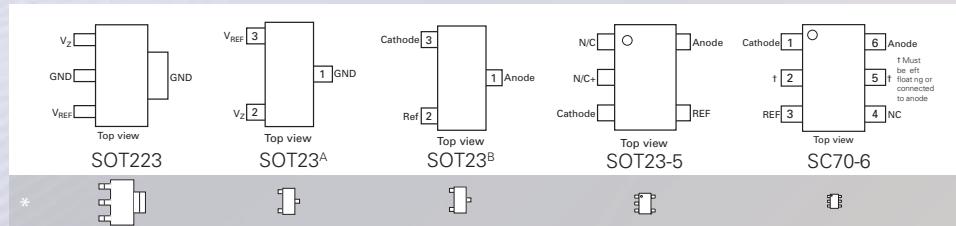

*Indicative relative size

Micro-power voltage references

The ZRB devices operate from a minimum operating current of 50 μ A with temperature coefficients generally of 90ppm/ $^{\circ}$ C maximum.

The ZXRE devices offer even lower minimum operating currents down to 8 μ A.

Zetex micro-power references are designed to operate over the temperature range -40 to 85 $^{\circ}$ C.

Features

- Temperature coefficient down to 50ppm/ $^{\circ}$ C
- Minimum (knee) current down to 8 μ A
- No stabilizing capacitor required
- SOT23 package


Applications

- Precision power supplies
- Battery powered and portable equipment
- Metering and measurement systems
- Instrumentation
- Test equipment

Part number	Reverse breakdown voltage	Min. current μ A	Max. current mA	Max. temperature coefficient ppm/ $^{\circ}$ C	Max. slope resistance Ω	Tolerance @25 $^{\circ}$ C %	Package
ZXRE1004	1.22	8	20	75	0.6	1	SOT23
ZXRE125	1.22	8	20	75	0.6	0.5, 1, 2	SOT23
ZRC250	2.5	20	5	90	1	1, 2	SOT23
ZRC330	3.3	20	5	50	2	1, 2	SOT23
ZRC400	4.096	23	5	90	2	1	SOT23
ZRB500	5	50	15	50	1.5	1, 2	SOT23
ZRC500	5	25	5	90	2	1	SOT23

Application circuit

Micropower 2.5V reference

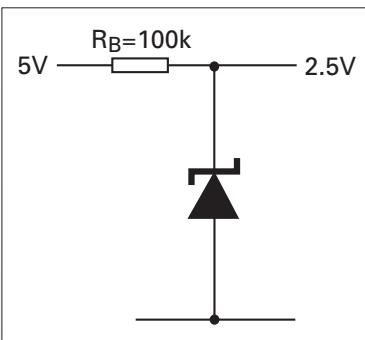

Connection diagram



Industry standard references

Zetex has taken the features of its micro-power references to provide improved versions of three industry standard families.

ZXRE4041 offers a better minimum operating current than the LM4041. The ZR4040 family also offers a better minimum operating current than the LM4040. ZR285 has a better temperature coefficient than the LM285-2.5.

Zetex micro-power references are offered in industrial and extended temperature versions.

Features

- 0.5%, 1%, 2% and 3% tolerance
- 20ppm/ $^{\circ}\text{C}$ typical temperature coefficient
- 20 μA knee current
- SOT23 package

Applications

- Precision power supplies
- Battery powered equipment
- Portable communications devices
- Notebook and palmtop computers

Part number	Competitor part number	Reverse breakdown voltage	Min. current μA	Max. current mA	Max. temperature coefficient ppm/ $^{\circ}\text{C}$	Max. slope resistance Ω	Tolerance @25 $^{\circ}\text{C}$ %	Package
ZXRE4041	LM4041	1.225	30	12	100	0.92	0.5, 1, 2	SOT23
LM4041	LM4041	1.225	30	12	100	0.6	0.5, 1	SOT23, SC70-5*
ZR285-2.5	LM285-2.5	2.5	20	20	90	1	1	SOT23
ZR4040-2.5	LM4040-2.5	2.5	50	20	90	2	0.5, 1, 2	SOT23
LM4040-2.5	LM4040-2.5	2.5	60	15	100	0.9	0.5, 1	SOT23, SC70-5*
LM4040-3.0*	LM4040-3.0	3	62	15	100	0.9	0.2, 0.5, 1	SOT23, SC70-5*
ZR4040-4.1	LM4040-4.1	4.096	50	20	90	2	1	SOT23
ZR4040-5	LM4040-5.0	5	50	20	90	1.5	1	SOT23
LM4040-5.0	LM4040-5.0	5	60	15	100	1.1	0.5, 1	SOT23, SC70-5*


*due late Q2, 2008

LM4040 and LM4041 competitive comparison


Company	Zetex	NSC	Zetex	NSC	Zetex	NSC
Part number	LM4040-25	LM4040-25	LM4040-50	LM4040-50	LM4041	LM4041
Bandgap voltage	2.5V		5.0V		1.225V	
Initial tolerance	%	1, 0.5	2, 1, 0.5, 0.2, 0.1	1, 0.5	2, 1, 0.5, 0.2, 0.1	1, 0.5
Min. current	μA	60	60	60	60	60
Max. current	mA	15	15	15	15	15
Temp co.	ppm/ $^{\circ}\text{C}$	100	100	100	100	100
Noise	μV_{RMS}	45	35	105	80	60
Temp. range	$^{\circ}\text{C}$	-40 to 125	-40 to 85	-40 to 125	-40 to 85	-40 to 125
Packages	SOT23 SC70-5	SOT23, SC70-5	SOT23 SC70-5	SOT23, SC70-5	SOT23 SC70-5	SOT23, SC70-5

Application circuit

Precision 1.225V reference



Connection diagram

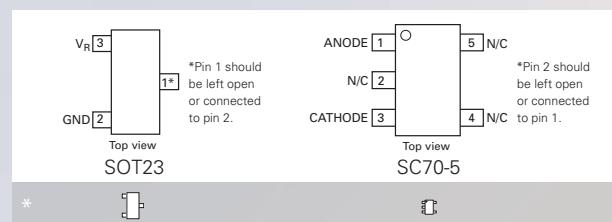

*Indicative relative size

Linear regulators

Section 6.0




Consisting of four distinct product families, the Zetex regulator range provides designers with the means to find the best low power regulator for the job – every time.

The low quiescent current and high current handling of many Zetex regulators means industry standard parts are simply outperformed.

Contents

Miniature linear regulators	64
Industry standard improved regulators	65
Ultra-low dropout regulators	66
Micro-power low dropout regulators	67

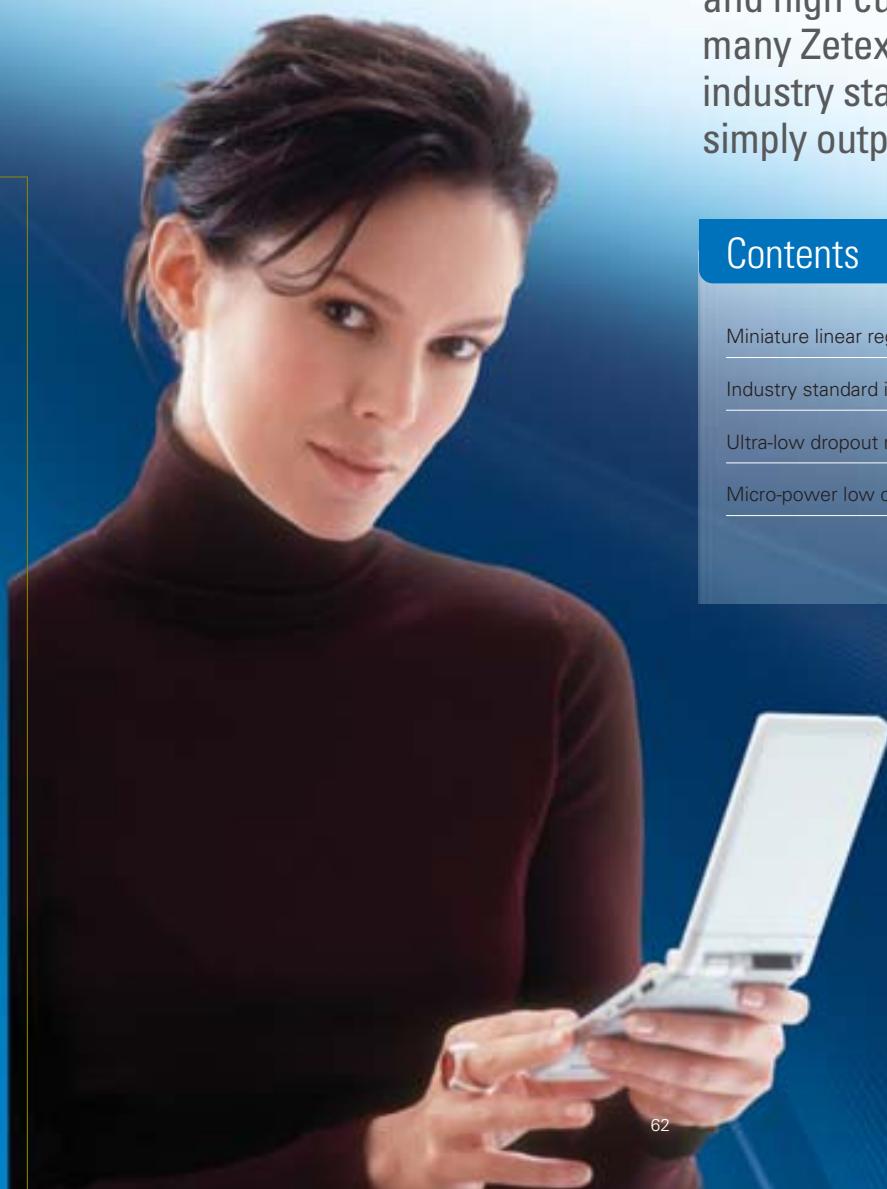

Linear regulator families

Family	Miniature linear regulators	Improved industry standard equivalents	Ultra-low dropout regulators	Micro-power low dropout regulators
Feature	Small SOT23 package general purpose regulator	Equivalent to 78L range but with lower I_O and higher I_{MAX}	Extremely low dropout voltage and high I_{MAX}	Equivalent to MAX8511, MIC5213, LMS5213
Output voltage	2.5, 3.3, 5.0V	3.0, 3.3, 5.0, 10V	3.3, 5.0V	2.5, 2.8, 3.0, 3.3V
Tolerance	$\pm 2.5\%$	$\pm 2.5\%$	$\pm 2\%$	$\pm 2\%$
Input voltage (max.)	20V	20V	20V	5.5V
Dropout voltage (max.)	2V	2V	75mV @ 100mA	280mV @ 100mA
Quiescent current (max.)	40 μ A to 100 μ A	600 μ A	1mA	50 μ A
Standby current	N/A	N/A	30 μ A	1 μ A
Output current (max.)	50mA	200mA	300mA	150mA
Temperature range	-55 to +125°C	-55 to +125°C	-40 to +85°C	-40 to +85°C
Dissipation/power	SOT23 = 500mW	SOT223 = 2W	SM8 = 2W	SC70-5 = 300mW TSOT23-5 = 450mW



Miniature linear regulators

Designed specifically for applications where space saving is important, the ZMR series is available in the small SOT23 package. These devices supply up to 50mA load current with quiescent current typically down to 30µA. Devices in the ZMR series are designed to operate over the temperature range -55 to 125°C.

The ZMR250 and ZMR500 have had their operating voltage increased to 22.5V and 25V respectively thereby replacing the ZMR25H and ZMR50H.

Features

- 2.5V, 3.3V and 5V output
- 22.5V, 24V and 25V maximum input voltage
- Output current up to 50mA
- Very low quiescent current (typically 30µA)
- SOT23 package
- -55 to 125°C ambient temperature range

Applications

- Local voltage regulation
- Ideal for applications where space is critical

Part number	Output voltage ⁽¹⁾ V	Max. input voltage V	Min. output current mA	Max. quiescent current µA	Typical dropout voltage V	Max. line regulation mV	Max. load regulation mV	Package
ZMR250	2.5	22.5	50	40	1.7	15	30	SOT23
ZMR330	3.3	24	50	170	1.7	10	35	SOT23
ZMR500	5	25	50	70	1.7	15	40	SOT23

(1) Output voltage tolerance 2.5%

Connection diagram



*Indicative relative size



Industry standard improved regulators

For circuits requiring higher currents, these devices can handle load currents up to 200mA whilst maintaining a quiescent current of typically only 350µA. The ZSR range offers performance characteristics superior to other local voltage regulators and are in a higher power dissipation package as standard. Devices in the ZSR series are designed to operate over the temperature range -55 to 125°C.

Features

- 350µA low quiescent current
- Improved line and load regulation
- Output current to 200mA
- SOT223 package

Applications

- Local voltage regulation
- General voltage regulation

Part number	Output voltage ⁽¹⁾ V	Max. input voltage V	Min. output current mA	Max. quiescent current µA	Typical dropout voltage V	Max. line regulation mV	Max. load regulation mV	Package
ZSR300	3	20	200	600	1.7	40	25	SOT223
ZSR330	3.3	20	200	600	1.7	30	25	SOT223
ZSR500	5	20	200	600	1.7	40	25	SOT223
ZSR1000	10	20	200	600	1.7	40	30	SOT223


(1) Output voltage tolerance 2.5

ZSR500 comparison


Family	ZSR500	Industry
Output voltage	5V	5V
Tolerance	±2.5%	±4%
Input voltage (max.)	20V	35V
Dropout voltage (max.)	2V	2V
Quiescent current (max.)	600µA	5.0mA
Output current (max.)	200mA	100mA
Line regulation (max.)	40mV	150mV
Load regulation (max.)	25mV	60mV
Temperature co-efficient (typ.)	0.1mV/C	-0.65mV/C
Package	SOT223	TO92 - SO8 - SOT89

(Bold) denotes improvement of specification.

Connection diagram



* Indicative relative size

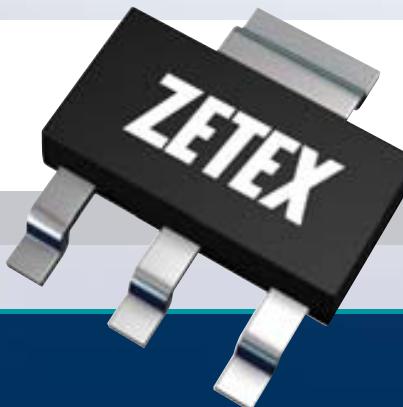

Ultra-low dropout regulators

The ZLDO regulator series utilizes a novel approach to achieve exceptional performance. The devices use the Zetex SM8 package which has 8 pins and is based on the SOT223 body outline.

The superior design allows the ZLDO to take advantage of the output device saturation voltage to produce an exceptionally low dropout voltage of only 30mV with 100mA load current.

For battery applications low power dissipation is a necessity so the controller circuit design has been optimized to produce a quiescent current of 560µA, with 1mA quiescent current at 300mA load.

A control pin is provided for device disable and a further pin gives a warning flag for low supply input. Devices in the ZLDO series are designed to operate over the temperature range -40 to 85°C.

Applications

- Battery powered devices
- Laptop/palmtop computers
- PDAs



Features

- Very low dropout voltage:
 - 6mV dropout at 10mA output
 - 30mV dropout at 100mA output
 - 100mV dropout at 300mA output
- Low quiescent current
- SM8 package

Part number	Output voltage ⁽¹⁾ V	Max. input voltage V	Dropout voltage ⁽²⁾ mV	Max load current mA	Quiescent current µA	Shutdown current µA	Load regulation ⁽³⁾ mV	Line regulation mV	Package
ZLDO330	3.3	20	30	300	560	11	78	52	SM8
ZLDO500	5	20	30	300	560	11	23	70	SM8

(1) Output voltage tolerance 2% (2) $I_L=100\text{mA}$ (3) $I_L=10 \text{ to } 300\text{mA}$ %

Connection diagram

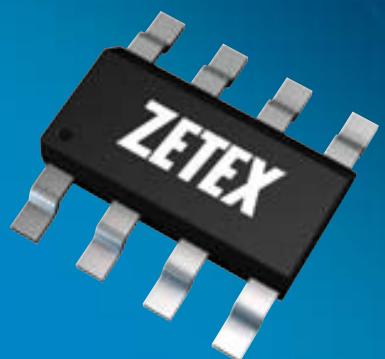

Micro-power low dropout regulators

The ZXCL range of low dropout regulators offers a very high performance in a very small package. They are available in the tiny SC70-5 pin package as well as the industry standard SOT23-5 package. The devices are inherently stable with tantalum and ceramic capacitors. Low output noise is achieved without the need for bypass capacitors.

Features

- Low 85mV dropout at 50mA load
- Ultra small SC70-5 package
- 25µA typical ground pin current
- 2.5, 2.8, 3.0 and 3.3V output
- Output voltage tolerance 2%

Applications

- Portable and battery powered equipment
- Cellular and cordless phones
- Palmtop and laptop computers
- Cameras, camcorders, personal stereos, PDAs


Part number	Output voltage ⁽¹⁾ V	Max. input voltage V	Dropout voltage ⁽²⁾ mV	Max. load current mA	Quiescent current µV	Shutdown current µA	Output noise voltage ⁽³⁾ µVms	Package
ZXCL250	2.5	5.5	85	100(3)	25	0.01	50	SOT23-5 SC70-5 ^A
ZXCL5213V25	2.5	5.5	85	100(3)	25	0.01	50	SC70-5 ^B
ZXCL280	2.8	5.5	85	150	25	0.01	50	SOT23-5 SC70-5 ^A
ZXCL5213V28	2.8	5.5	85	150	25	0.01	50	SC70-5 ^B
ZXCL300	3	5.5	85	150	25	0.01	50	SOT23-5 SC70-5 ^A
ZXCL5213V30	3	5.5	85	150	25	0.01	50	SC70-5 ^B
ZXCL330	3.3	5.5	85	150	25	0.01	50	SOT23-5 SC70-5 ^A
ZXCL5213V33	3.3	5.5	85	150	25	0.01	50	SC70-5 ^B

(1) Output voltage tolerance 2% (2) $I_L = 50\text{mA}$ (3) Limited by $R_{DS(on)}$ and power dissipation effects with 3 volt input voltage


ZXCL LDO comparison

Family	MIC5213	ZXCL	MAX8511
Output voltage	2.5, 2.6, 2.7, 2.8, 3.0, 3.3, 3.6, 5.0	2.5, 2.8, 3.0, 3.3	1.5, 1.8, 2.5, 2.7, 2.8, 2.85, 3.0, 3.3, 4.5
Tolerance at 1mA	±3%	±2%	±1%
Tolerance at 100mA	-	±3%	±3%
Temperature co-efficient (typ.)	200ppm/°C	-15ppm/°C	-
Input voltage (max.)	16	5.5	6
Dropout voltage (typ.)	250mV @ 50mA	85mV @ 50mA	80mV @ 80mA
Dropout voltage (max.)	600mV @ 80mA	280mV @ 100mA	170mV @ 80mA
Quiescent current (max.) no load	180µA typ.	50µA	90µA
Output current (max.)	80mA	150mA	120mA
Shut down current (max.)	10µA	1µA	1µA
Line regulation (max.)	0.3%	0.1%	No max.
Load regulation (max.) 1mA to 100mA	0.5%	0.04%	No max.
Packages	SC70-5 ^B	SC70-5 and SOT23-5	SC70-5 ^A

(Bold) denotes improvement of specification.

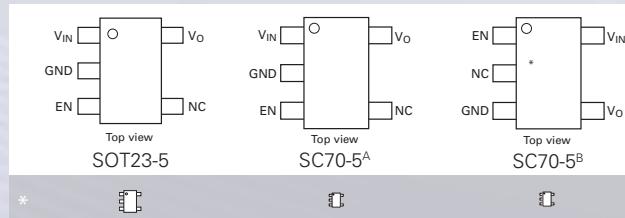

*Indicative relative size

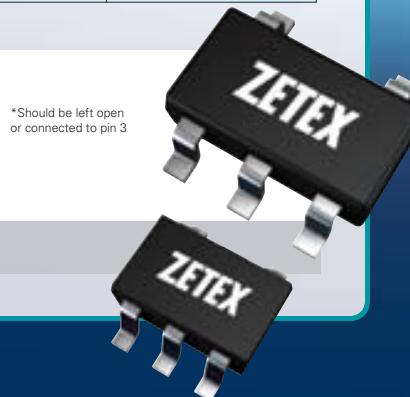


DC-DC boost converters

Section 7.0



Generating target voltages with the greatest efficiency possible is the goal of the Zetex series of DC-DC boost converters.

Optimized for battery-powered applications, they are purpose-designed to support today's low voltage, low power supply rails.

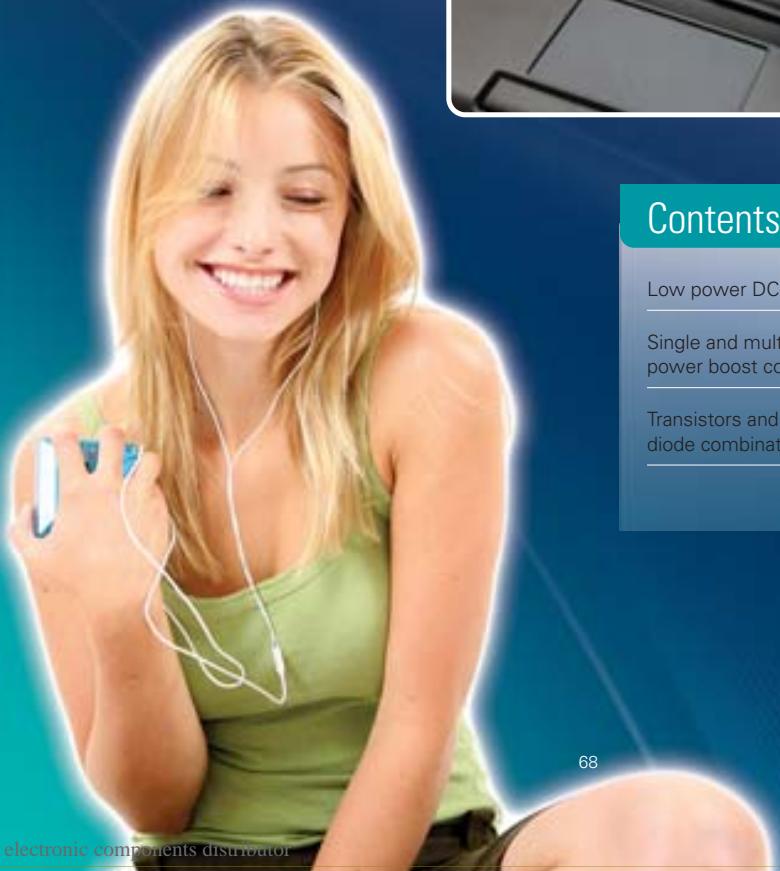

Contents

Low power DC-DC boost converters 69

Single and multi-cell system power boost controllers 70

Transistors and Schottky diode combinations 71

Low power DC-DC boost converters

The ZXLD1601/1615 are boost converters for low power rails. They integrate an internal NMOS switch and current sensing resistor thereby saving PCB space and cost. They operate directly from one Li-Ion cell and provide adjustable bias voltages of up to 28V, ideal for LCD and OLED displays.

The ZXLD1615 is pin compatible with LT1615.

Features

- Wide input voltage range: 2.5 to 5.5V
- Adjustable output voltage up to 28V
- Low shutdown current
- 85% efficiency
- PWM and analog control input
- Small surface mount packages

Applications


- PDAs
- Cellular phones
- Digital cameras
- Portable internet appliances
- Notebook and palmtop computers
- LCD and OLED bias

Part number	Input voltage range V _{IN}	Output voltage range (1) V	Shutdown current Max. μA	Quiescent current μA	Efficiency %	Switching frequency kHz	Package
ZXLD1601	2.5 - 5.5	V _{IN} to 28	0.1	60	85	1000	SC70-6
ZXLD1615	2.5 - 5.5	V _{IN} to 28	0.1	60	85	1000	TSOT23-5


(1) Limited only by voltage rating of external bipolar or MOSFET transistor (V_{CEO}/BvDSS)

Application circuit

OLED and LCD bias generator

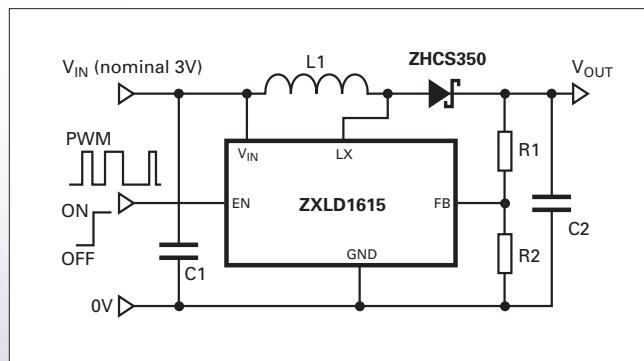

Connection diagrams

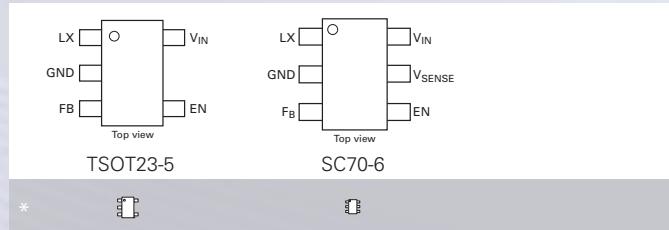

*Indicative relative size

7.0
DC-DC boost
converters

Single and multi-cell system power boost controllers

The ZXSC100/410/420 are voltage mode inductive boost controllers aimed at providing power rails from battery supplies. The ZXSC410/420 provide any regulated voltage above V_{IN} from dual cell and Li-Ion cells with a typical line regulation of 1%. The ZXSC420 option provides an 'end of regulation' flag which uses all available battery energy before signalling a shutdown. The ZXSC100 caters for single cell operation with a guaranteed start up under full load conditions down to 1V. All products feature a programmable peak current to optimize efficiency and supply requirements. Maximum output voltages are limited only by the rating of the external switching device.

The ZXSC440, although intended for camera flash applications, combines the shutdown and end of regulation features of the ZXSC410 and ZXSC420 respectively.

Features

- Typical 1% load and line regulation - ZXSC410/420
- 4.5 μ A typical shutdown current - ZXSC410/440
- End of regulation flag - ZXSC420/440
- Single cell operation - ZXSC100
- Programmable peak switch current

Applications


- System supplies from dual cell and Li-Ion cells - ZXSC410/420
- LCD bias voltage supplies - ZXSC410/420
- System supplies from single alkaline, NiCad or NiMH cells - ZXSC100
- System supplies from solar cells - ZXSC100
- Camera flash - ZXSC440

Part number	Input voltage range V	Output voltage range (1) V	Shutdown current μ A	Typical Quiescent current μ A	Efficiency %	Package
ZXSC100	0.93 - 3.5	V_{IN} to V_M	-	150	82	SO8
ZXSC410	1.8 - 8.0	V_{IN} to V_M	4.5	150	85	SOT23-6 ^a
ZXSC420	1.8 - 8.0	V_{IN} to V_M	-	150	85	SOT23-6 ^b
ZXSC440	1.8 - 8.0	V_{IN} to V_M	4.5	150	85	MSOP8

(1) V_M - limited only by voltage rating of external bipolar or MOSFET transistor (V_{CEO}/BV_{DSS})

Application circuit

ZXSC410 two cell boost converter

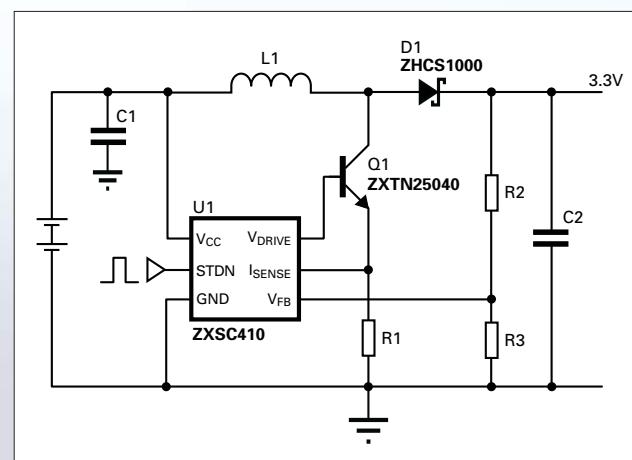

Application notes



- AN33 ZXSC100 single cell DC-DC converter LED driving applications
- AN34 ZXSC100 power supply for digital still cameras

Transistor and Schottky diode combinations

Zetex DC-DC boost controller ICs are supported by a complementary range of discrete components.

	Device	Specification		Part number	Package
		V _{CEO} /BV _{DSS} /VR V	I _C /I _D /I _F A		
Switch devices	NPN bipolar	15	6	ZXTN23015DFH	SOT23
		15	5	ZXTN25015DFH	SOT23
		20	4.5	ZXTN25020DFH	SOT23
		40	4	ZXTN25040DFH	SOT23
		50	3.5	ZXTN25050DFH	SOT23
Rectifier diodes	Schottky diodes	30	I _{PK} <0.2	BAT 54	SOT23
		40	I _{PK} <0.4	ZHCS400	SOD323
		40	I _{PK} <0.5	ZHCS500	SOT23
		40	I _{PK} <1.0	ZHCS1000	SOT23
Combination devices	NPN bipolar + Schottky diode	20	4.5	ZX3CDBS1M832	DFN832
		40	1.85		

Connection diagrams

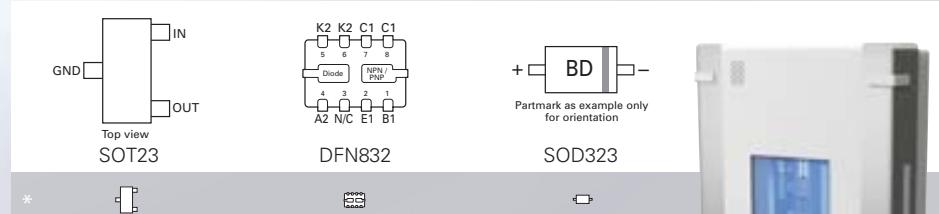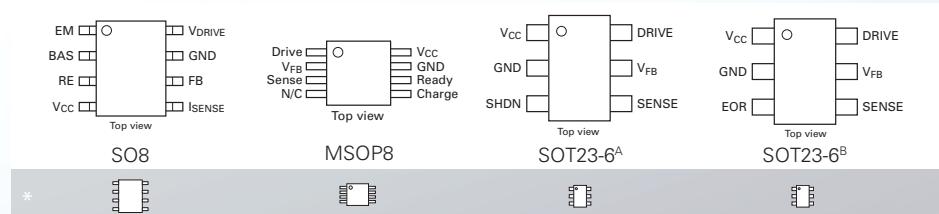

Special functions

Section 8.0

Contents

Supply voltage monitors (uP generators)	73
Siren Driver	74
Temperature sensor	74
Magneto-resistive sensors	75

Through its expertise in analog chip design Zetex has been able to complement its power management ICs with a unique series of special function ICs that solve some quite specific technical challenges for a wide range of applications.



Supply voltage monitors (microprocessor reset generators)

These devices are three terminal voltage monitoring circuits used in microprocessor systems. They provide a 'power on reset' function and produce a system reset 'low' on power fail. A selection of reset thresholds are available. All devices are designed to operate over the temperature range -40 to 85°C.

Features


- Automatic reset generation
- Guaranteed operation from 1 volt
- High output current

Applications


- Microprocessor systems
- Computers and computer peripherals
- Automotive electronics

Part number	V _{CC} V	Threshold voltage V	Hysteresis mV	Max. output sink current mA	Input voltage range V	Max. quiescent current µA	Package
ZSM300	3	2.63	20	60	1 to 6.5	190	SOT223
ZM33164-3	3	2.68	60	60	1 to 10	190	SOT223
ZSM560	5	4.6	20	60	1 to 6.5	200	SOT223

Connection diagram



*Indicative relative size

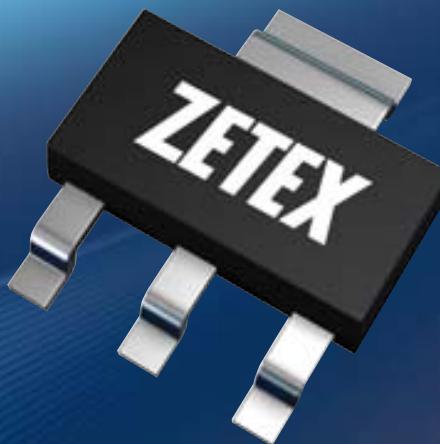

Siren driver


The ZSD100 is a swept frequency alarm signal generator for static and automotive security alarm systems. Including an audio frequency signal generator, low frequency sweep generator, disable circuitry and output driver stages, it provides all the functions needed to produce a standard siren signal.

Features

- Wide supply voltage range
- Low current requirement
- Needs few external components
- Supports single-ended or push-pull output stages
- User selected audio and sweep frequencies

Part number	Supply Voltage range V	Supply current		Output current source/sink mA	Low frequency oscillator range		Oscillator output frequency range		Package
		Operating mA	Standby μ A		Min. Hz	Max. Hz	Min. Hz	Max. Hz	
ZSD100	4 to 18	4	1	5/0.5	0.1	10	100	10000	SO8

Connection diagram



*Indicative relative size

Temperature sensor

The ZNI1000 is a thin film Ni Resistance Temperature Detector (RTD). Its high temperature coefficient produces higher signal outputs than other RTDs, resulting in greater accuracy for smaller temperature changes.

The very small SOT23 package results in fast response time and

allows the temperature measurement in different space-saving applications eg: on PCBs near heat generating devices.

Features

- Resistance at 0°C: 1000 Ω
- -55 to 150°C temperature range


- DIN 43760 specification
- SOT23 package

Applications

- Circuit protection
- Temperature compensation
- Temperature measurement
- Automotive climate control

Part number	Continuous current mA	Resistance T= 0°C I<1mA Ω	Resistance T= 100°C I<1mA Ω	Tolerances class B -55°C to 0°C	Tolerances class B 0°C to 150°C	Package
ZNI1000	4	1000	1618	+/- (0.4+0.028*ITI)	+/- (0.4+0.007*ITI)	SOT23

Connection diagram

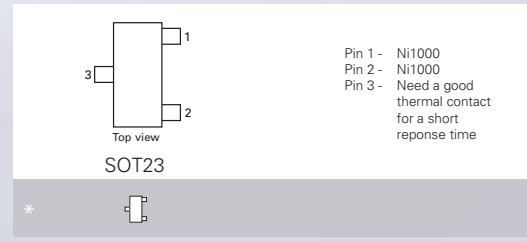

*Indicative relative size

Application notes

AN38 - Basic introduction to the use of the ZNI1000 nickel temperature sensor

Magneto-resistive sensors (linear position)

These extremely sensitive magnetic sensor chips can be used to detect the presence of magnetic parts. Available with single or dual sensors and with or without an internal magnet, the sensors suit a range of linear position measurement applications.

Features


- Output proportional to magnetic field
 - Sensitivity adjustment
 - Hysteresis suppression
 - ZMY20M and ZMZ20M with internal magnet

Applications

- Position sensing for process control
 - Scalar measurement for compassing
 - Fluid metering
 - Measurement of current in a conductor without connection

Part number	Supply voltage max V	Output voltage mV/V	Bridge resistance kΩ	Sensitivity mV/V kA/M	Max. offset voltage mV/V	Internal magnet	Package
ZMY20M	12	18	1.7	5.5	± 1.5	Yes	SOT223S
ZMZ20M	12	18	1.7	5.0	± 1.5	Yes	E-line 4-pin

Connection diagram

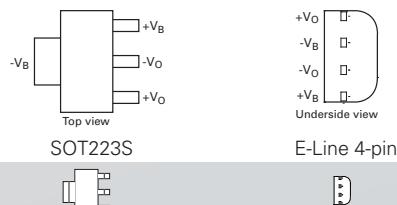

E-line devices

The E-Line devices are normally available as loose product in a box (500 piece quantity).

*Indicative relative size

Magneto-resistive sensors (angular position)

Incorporating a pair of sensors mounted at 45° to each other, the ZMT31 magnetic sensor enables non-contact detection of angular position and rotation.

Features

- Measures magnetic field H_{ROT} ($> 50\text{ kA/m}$)
 - Magnetic field H_{ROT} parallel to the chip surface causes a sinusoidal output signal
 - SM8 package
 - -40 to 150°C ambient temperature range


Applications

- Automotive (pedal position etc.)
 - Contactless angular measurement
 - Contactless potentiometers
 - Contactless revolution counting

Part number	Supply voltage V	Sensor chip alignment error	Typical bridge resistance kΩ	Sensitivity ⁽¹⁾ S _α	Max. offset voltage ⁽¹⁾ mV/V	Half bridge symmetry ⁽¹⁾	Package
ZMT32	5	<2°	3.0	>±0.2	±2	<±2.0	SM8

⁽¹⁾Bridge 1: $\alpha=0^\circ$, bridge2: $\alpha=45^\circ$

Connection diagram




*Indicative relative size

Package information


Section 9.0

DFN322




A diagram illustrating the unreeeling process. It shows a horizontal reel with 12 circular holes on the top edge and 12 rectangular ports on the bottom edge. An arrow points from right to left above the reel, labeled "Direction of unreel".

DFN832



The diagram shows a horizontal strip representing a tape reel with ten circular pins. An arrow labeled "Direction of unreeel" points from right to left above the strip. Below the strip, the label "Pin 1" has an arrow pointing to the first pin on the left.


DPAK





16mm tape width

Part no. suffixed TC = 2.5k devices per 13" reel

E-Line





MSOP8

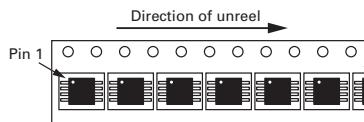

12mm tape width
Part no. suffixed TA = 1k devices per 7" reel
Part no. suffixed TC = 4k devices per 13" reel



SC70-5/6

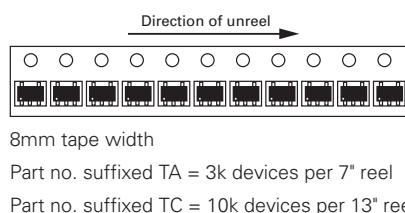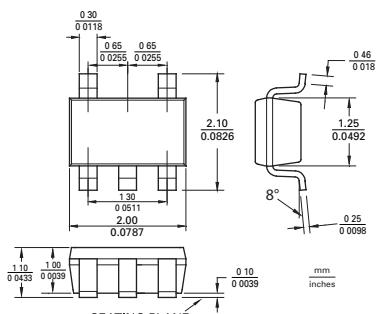

8mm tape width
Part no. suffixed TA = 3k devices per 7" reel
Part no. suffixed TC = 10k devices per 13" reel



Note: SC70-6 has an additional centre pin.
The dimensions are the same as others in the diagram.

SM8





12mm tape width
Part no. suffixed TA = 1k devices per 7" reel
Part no. suffixed TC = 4k devices per 13" reel

SOD323

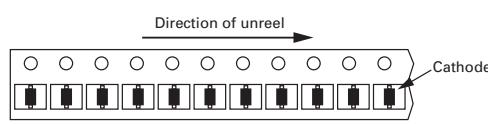



8mm tape width
Part no. suffixed TA = 3k devices per 7" reel
Part no. suffixed TC = 10k devices per 13" reel

SOD523





8mm tape width
Part no. suffixed TA = 3k devices per 7" reel
Part no. suffixed TC = 10k devices per 13" reel

S08

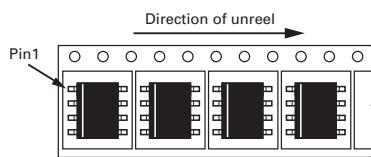



12mm tape width
Part no. suffixed TA = 500 devices per 7" reel
Part no. suffixed TC = 2.5k devices per 13" reel

SOT223





12mm tape width
Part no. suffixed TA = 1k devices per 7" reel
Part no. suffixed TC = 4k devices per 13" reel

SOT23



8mm tape width
Part no. suffixed TA = 3k devices per 7" reel
Part no. suffixed TC = 10k devices per 13" reel
Part no. suffixed TD = 500 devices per 7" reel

SOT23F


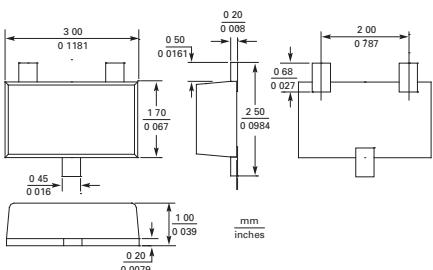


8mm tape width

Part no. suffixed TA = 3k devices per 7" reel

Part no. suffixed TC = 10k devices per 13" reel



SOT23-5

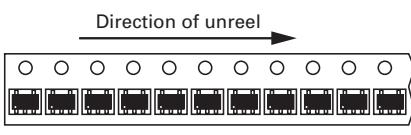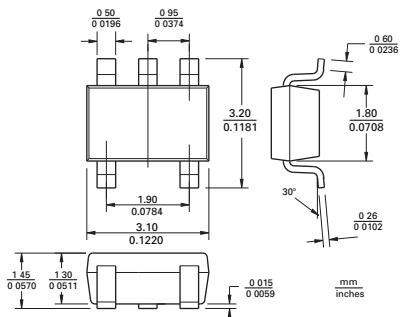

8mm tape width

Part no. suffixed TA = 3k devices per 7" reel

SOT23-6





8mm tape width

Part no. suffixed TA = 3k devices per 7" reel

Part no. suffixed TC = 10k devices per 13" reel

SOT323





8mm tape width

Part no. suffixed TA = 3k devices per 7" reel


Part no. suffixed TC = 10k devices per 13" reel

SOT89





12mm tape width
Part no. suffixed TA = 1k devices per 7" reel
Part no. suffixed TC = 4k devices per 13" reel

TO220





Delivered in tubes - 50 units per tube

TSOT23-5

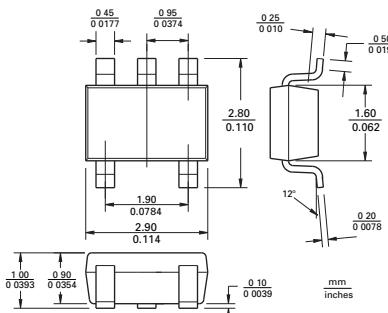

8mm tape width
Part no. suffixed TA = 3k devices per 7" reel

TDFN533

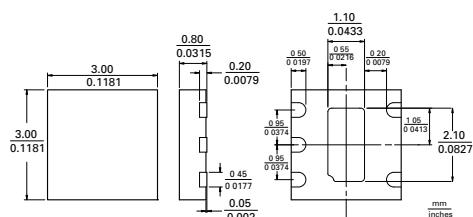

12mm tape width
Part no. suffixed TC = 3k devices per 7" reel




9.0
Package
information

Thermal data

Section 9.1

DFN322


1.5W devices

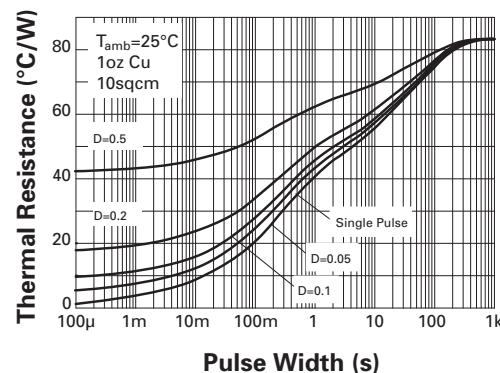

$\theta_{j-a}=83^{\circ}\text{C}/\text{W}$ maximum.


Mounted on an FR4 pcb with 32mm x 32mm coverage of single sided 1oz weight copper in still air conditions.

Derating curves

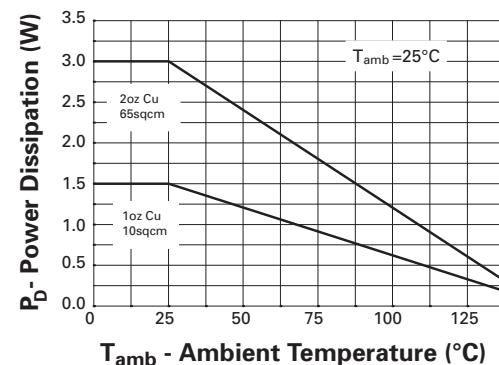

DFN832


Single die on 1.5W devices

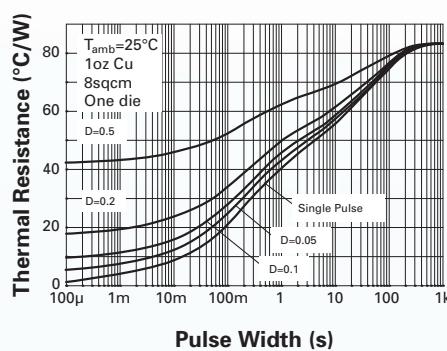

$\theta_{j-a}=83^{\circ}\text{C}/\text{W}$ maximum.


Mounted on an FR4 pcb with 28mm x 28mm coverage of single sided 2oz weight copper in still air conditions.

Derating curve

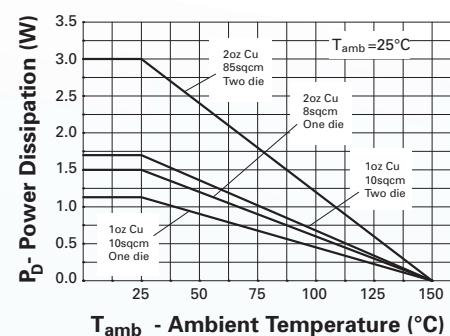

E-Line



1.2W devices

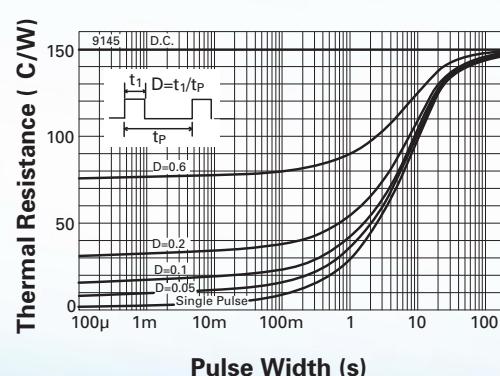

$\theta_{j-a}=150^{\circ}\text{C}/\text{W}$ maximum.


Through hole mounted on an FR4 pcb with a 25mm x 25mm coverage of single sided 1oz weight copper, in still air conditions, leg length 4mm.

Derating curves

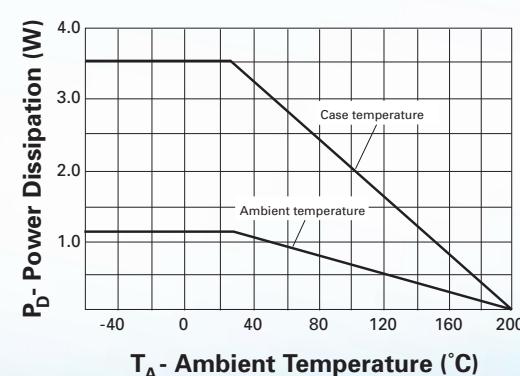

DPAK


2.1W devices

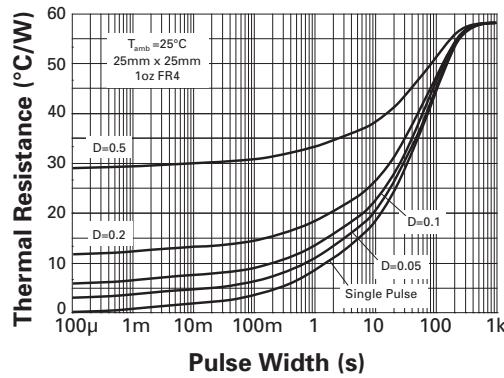


$\Theta_{j-a}=59^{\circ}\text{C}/\text{W}$ maximum.

Mounted on an FR4 pcb of 25mm x 25mm x 1.6mm with high coverage of single sided 1oz weight copper, in still air conditions.

Derating curves

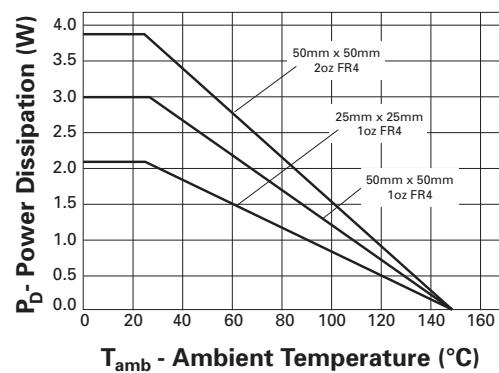

3.9W devices

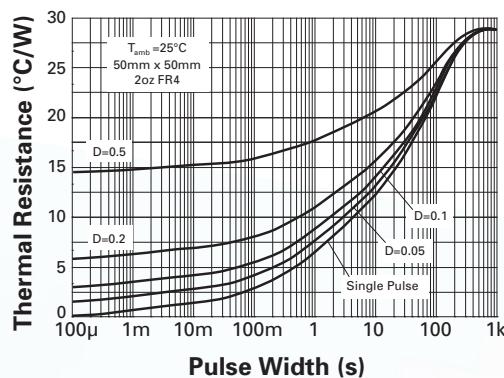


$\Theta_{j-a}=32^{\circ}\text{C}/\text{W}$ maximum.

Mounted on an FR4 pcb of 50mm x 50mm x 1.6mm with high coverage of single sided 2oz weight copper, in still air conditions.

MSOP8


One active die 0.87W devices

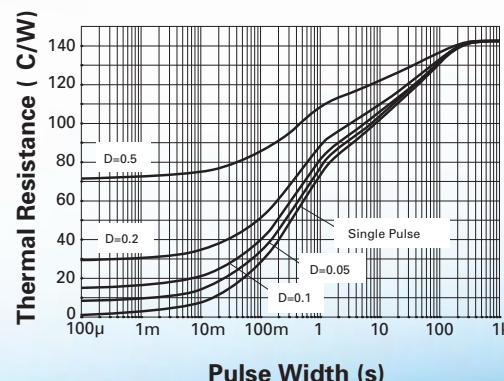

$\Theta_{j-a}=143^{\circ}\text{C}/\text{W}$ maximum.


One active die. Mounted on 25mm x 25mm x 1.6mm FR4 pcb with high coverage of single sided 1oz weight copper, in still air conditions.

Derating curve

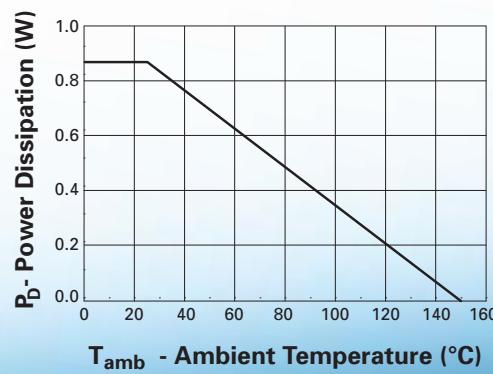


SM8 dual

Single die on 2.25W devices

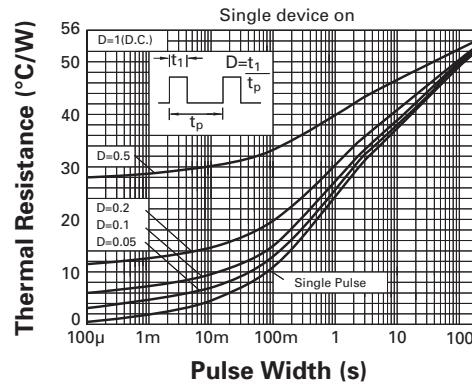


$\Theta_{j-a}=55.6^{\circ}\text{C}/\text{W}$ maximum.

Derating curves

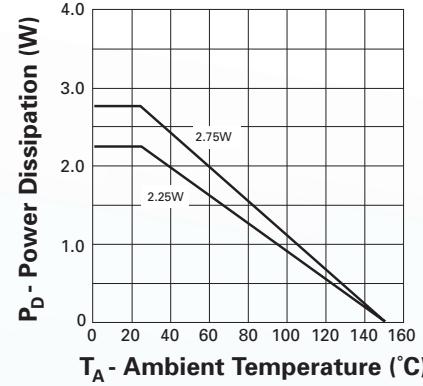

Mounted on a 50mm x 50mm x 1.6mm FR4 pcb with a high coverage of single sided 2oz weight copper, in still air conditions.


Both die on equally, total power 2.75W

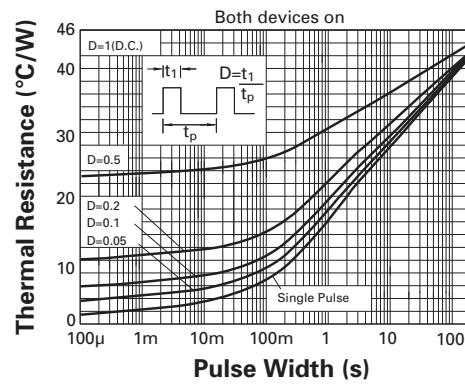

$\Theta_{j-a}=45.6^{\circ}\text{C}/\text{W}$ maximum.

SOD323


330mW devices

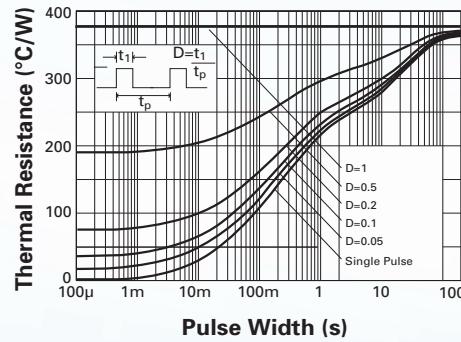

$\Theta_{j-a}=380^{\circ}\text{C}/\text{W}$.


Mounted on 10mm x 8mm x 1.6mm FR4 pcb with high coverage of 1oz weight copper in still air conditions.

Derating curve

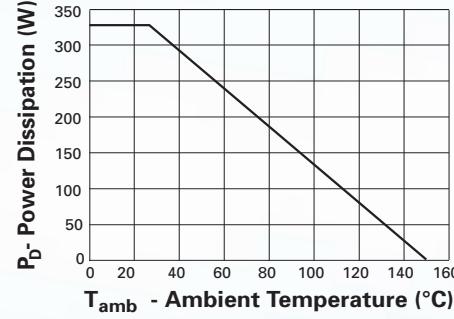

SOD523


360mW devices

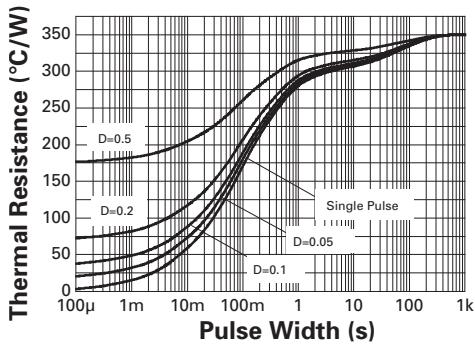

$\theta_{j-a}=350^{\circ}\text{C}/\text{W}$.


Mounted on 25mm x 25mm x 1.6mm FR4 pcb with high coverage of 1oz weight copper, in still air conditions.

Derating curve

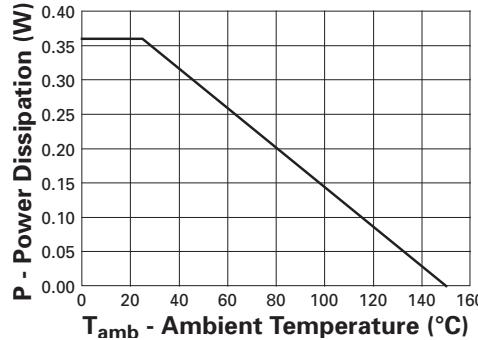


SO8 dual

Single die on 1.25W devices

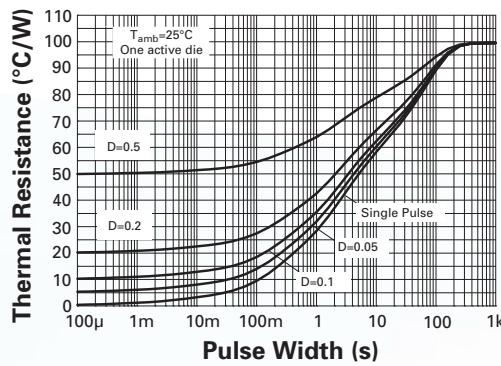


$\theta_{j-a}=100^{\circ}\text{C}/\text{W}$ maximum.

Both die on equally, total power 1.75W

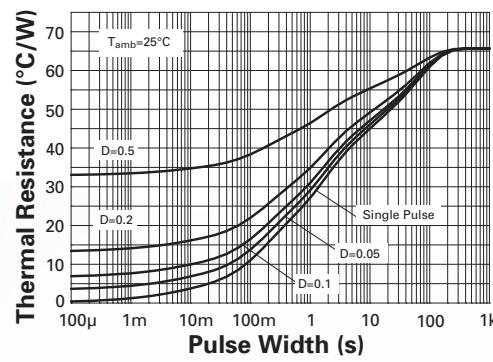

$\theta_{j-a}=69^{\circ}\text{C}/\text{W}$ maximum.


Derating curves

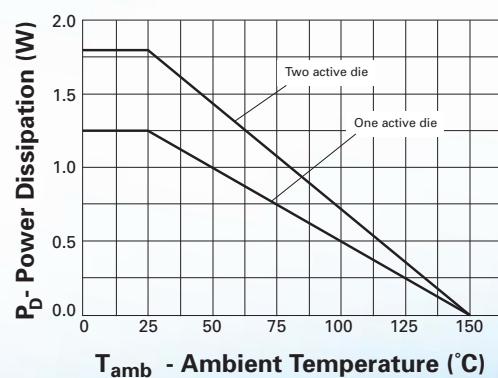

Mounted on 25mm x 25mm x 1.6mm FR4 pcb with full coverage of single sided 1oz weight copper, in still air conditions.

SOT223


2W devices

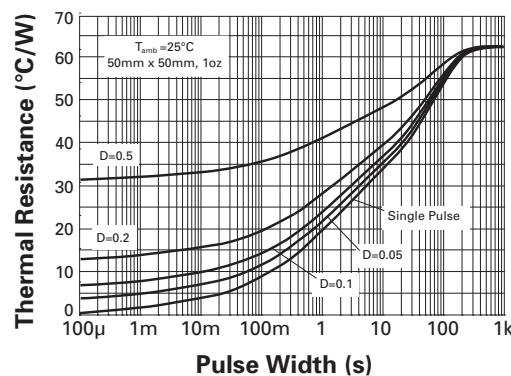


$\Theta_{j-a}=62.5^{\circ}\text{C}/\text{W}$ maximum.

Mounted on an FR4 pcb with 50mm x 50mm of single sided 1oz weight copper, in still air conditions.

Derating curve

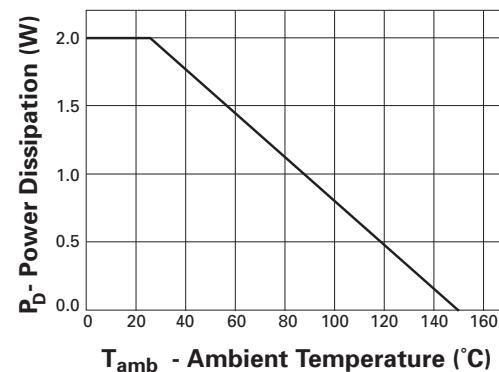


3W devices

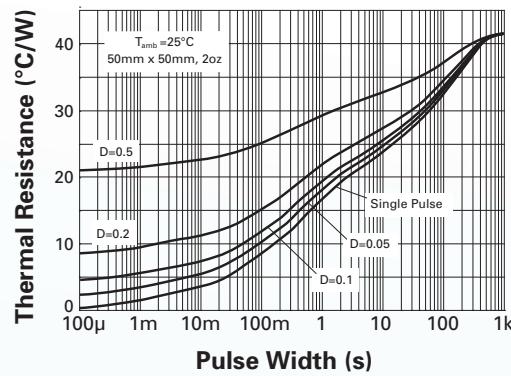

$\Theta_{j-a}=41.7^{\circ}\text{C}/\text{W}$ maximum.


Mounted on 50mm x 50mm single sided 2oz weight copper, in still air conditions.

Derating curve

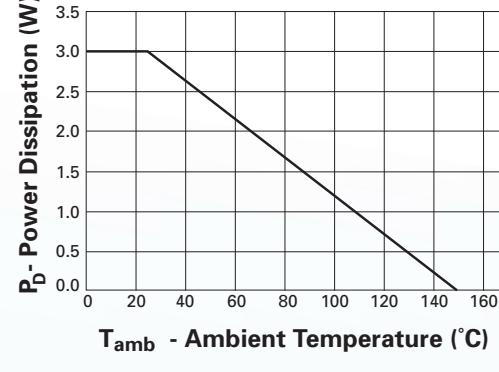

SOT23-6


1.1W devices

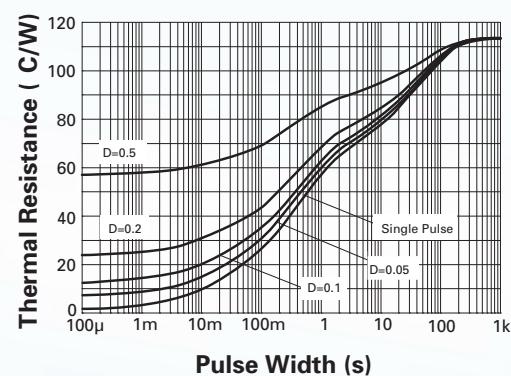

$\Theta_{j-a}=113^{\circ}\text{C}/\text{W}$ maximum.


Mounted on 25mm x 25mm x 1.6mm FR4 pcb with high coverage of single sided 1oz copper, in still air conditions.

Derating curve

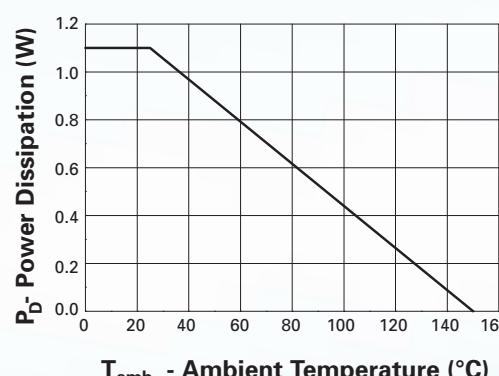

SOT23


350mW devices

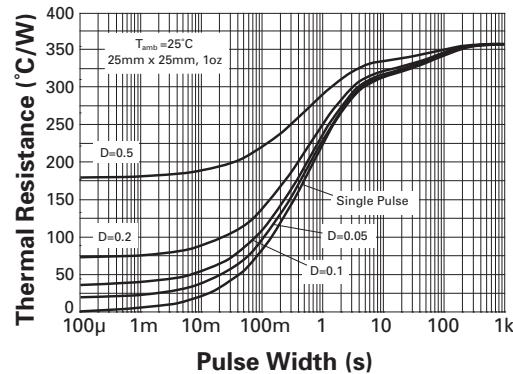


$\Theta_{\text{j-a}} = 350^{\circ}\text{C}/\text{W}$ maximum.

Mounted on a 25mm x 25mm x 1.6mm FR4 pcb with high coverage of single sided 1oz weight copper, in still air conditions.

Derating curve

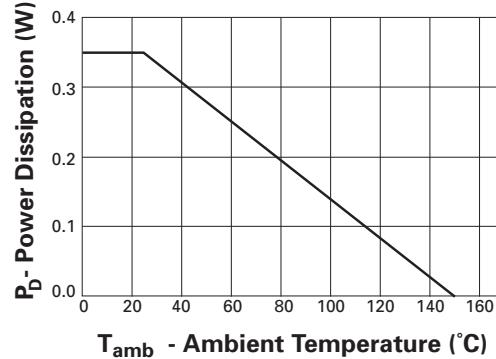


625mW devices

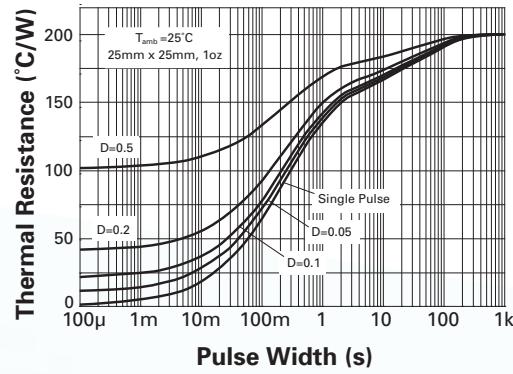


$\Theta_{\text{j-a}} = 200^{\circ}\text{C}/\text{W}$ maximum.

Mounted on a 25mm x 25mm x 1.6mm FR4 pcb with high coverage of single sided 1oz weight copper, in still air conditions.

Derating curve

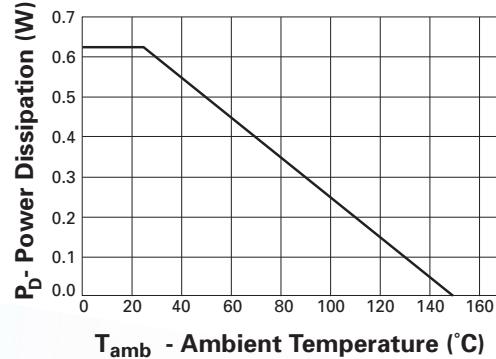


1.25W devices

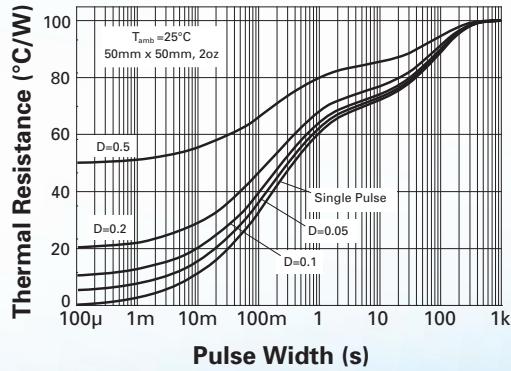

$\Theta_{\text{j-a}} = 100^{\circ}\text{C}/\text{W}$ maximum.


Mounted on a 50mm x 50mm x 1.6mm FR4 pcb with high coverage of single sided 2oz weight copper, in still air conditions.

Derating curves

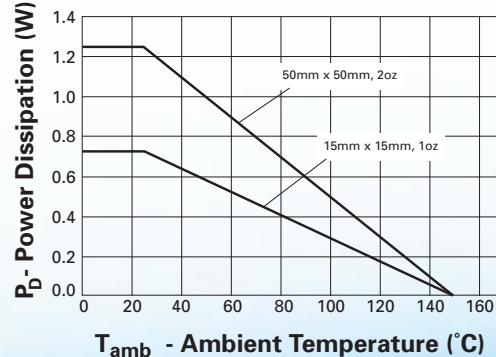

SOT323


385mW devices

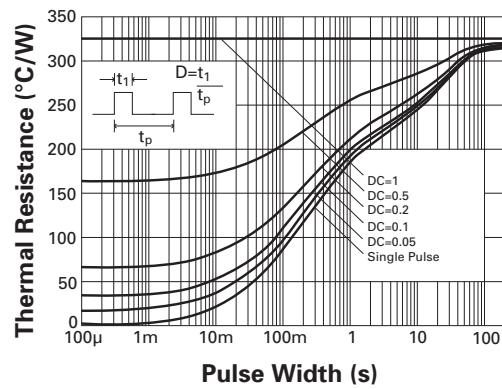

$\theta_{j-a}=325^{\circ}\text{C}/\text{W}$


Mounted on 10mm x 8mm x 1.6mm FR4 pcb with high coverage of 1oz weight copper in still air conditions.

Derating curve

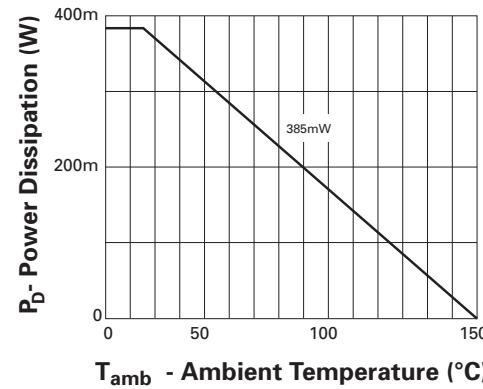

SOT89


1W devices

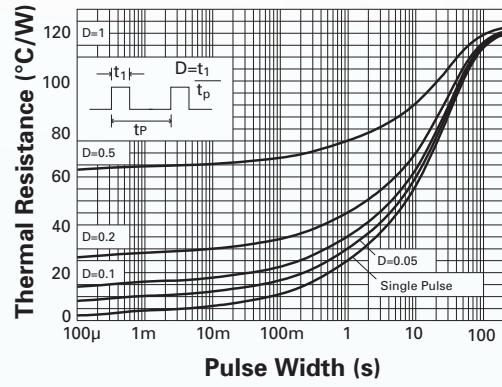

$\theta_{j-a}=125^{\circ}\text{C}/\text{W}$ maximum, $\theta_{j-tab}=10^{\circ}\text{C}/\text{W}$ typical.


Mounted on a 15mm x 15mm x 1.6mm FR4 pcb with a high coverage of single sided 1oz weight copper, in still air conditions.

Derating curve

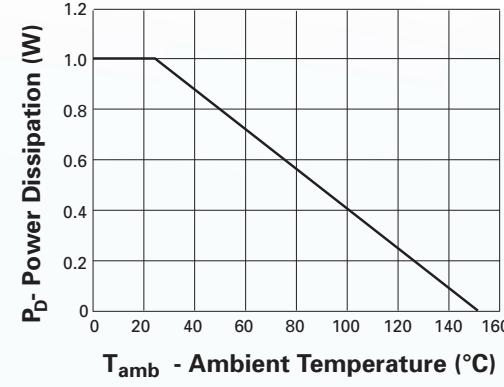


SOT23F

Transient Thermal Impedance

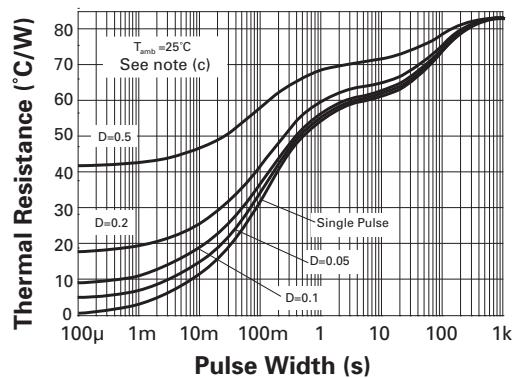

Derating curve

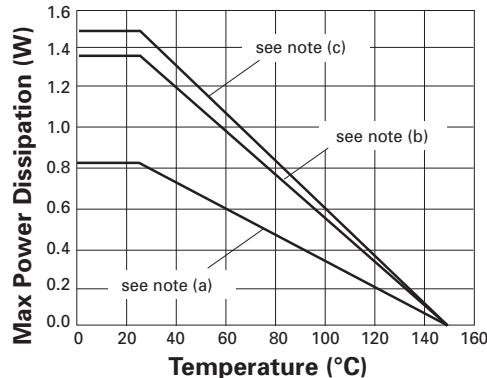

(a) For a device surface mounted on 15mm x 15mm x 1.6mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.

(b) Mounted on 25mm x 25mm x 1.6mm FR4 PCB with a high coverage of single sided 2oz copper in still air conditions.

(c) Mounted on 50mm x 50mm x 1.6mm FR4 PCB with a high coverage of single sided 2oz copper in still air conditions.

Alphanumeric index

Section 10.0

2N7002	45	FCX1053A.....	20	FMMT551	22
		FCX1147A.....	13	FMMT555	25
		FCX1149A.....	15	FMMT558	27
		FCX1151A.....	18	FMMT560	27
B					
Back-Off Diodes	40	FCX458.....	26	FMMT589	18
BAT1000	38	FCX491	20	FMMT591	22
BAT54	38	FCX491A.....	16	FMMT591A	19
BAT54A	38	FCX493	21	FMMT593	23
BAT54C	38	FCX495	24	FMMT596	25
BAT54S	38	FCX555	25	FMMT597	27
BAT750	38	FCX558	27	FMMT614	28
BCV47	28	FCX589	18	FMMT617	10
BCV49	28	FCX591	22	FMMT618	11
BCW66H	17	FCX591A	19	FMMT619	17
BCW68H	19	FCX593	23	FMMT620	21
BCX38C	28	FCX596	25	FMMT624	24
BCX5316	22	FCX605	28	FMMT625	24
BCX5616	21	FCX617	10	FMMT634	28
BCX6825	12	FCX619	17	FMMT6517	26
BCX6925	15	FCX658A	26	FMMT6520	27
BS107P	49	FCX688B	10	FMMT717	13
BS250F	44	FCX690B	16	FMMT718	15
BS250P	44	FCX705	28	FMMT720	19
BSP75G	47	FCX717	13	FMMT722	22
BSP75N	47	FCX718	14	FMMT723	23
BSR33	22	FCX789A	15	FMMT734	28
BSR43	21	FCX790A	19	FMMTA06	21
BSS123	48	FMMT38C	28	FMMTA13	28
BSS123A	48	FMMT413	28	FMMTA14	28
BSS138	43	FMMT415	28	FMMTA42	26
BSS84	44	FMMT417	28	FMMTA56	23
BST39	26	FMMT449	16	FMMTA92	27
BST52	28	FMMT451	20	FMMT618	11
BYP53/54	40	FMMT455	24	FMMT619	17
BYP57/58	40	FMMT458	26	FMMT717	13
BYY53/54	40	FMMT459	26	FMMT718	15
BYY57/58	40	FMMT489	16	FZT1047A	10
BYY57A/58A	40	FMMT491	20	FZT1048A	10
BZP61/62	40	FMMT491A	16	FZT1049A	12
BZP63/64	40	FMMT493	21	FZT1051A	16
BZV61/62	40	FMMT493A	20	FZT1053A	20
BZV63/64	40	FMMT494	24	FZT1147A	13
		FMMT495	24	FZT1149A	15
		FMMT497	26	FZT1151A	18
		FMMT549	18	FZT458	26
		FMMT549A	18	FZT489	16

FZT491	20	FZTA42	26	ZHCS756	38
FZT491A	16	FZTA92	27	ZHT431	59
FZT493	21	L		ZLDO330	66
FZT549	18	LM4040-2.5	61	ZLDO500	66
FZT558	27	LM4040-3.0	61	ZLLS1000	38
FZT560	27	LM4040-5.0	61	ZLLS2000	38
FZT589	18	LM4041	61	ZLLS350	38
FZT591	22			ZLLS400	38
FZT591A	19			ZLLS410	38
FZT593	23			ZLLS500	38
FZT600	28	Rectifier Stacks	40	ZMR250	64
FZT600B	28			ZMR330	64
FZT603	28	S		ZMR500	64
FZT605	28	SXTA42	26	ZMT32	75
FZT649	12			ZMV832B	40
FZT651	20			ZMV833B	40
FZT653	21	TLV431	59	ZMV930	39
FZT655	24			ZMV931	39
FZT657	26			ZMV932	39
FZT658	26	VN10LP	45	ZMV933	39
FZT688B	10			ZMV933A	39
FZT689B	11	Z		ZMV934	39
FZT690B	16	ZC831B	40	ZMV934A	39
FZT692B	20	ZC832B	40	ZMY20M	75
FZT694B	24	ZC833B	40	ZMZ20M	75
FZT696B	24	ZC834B	40	ZNI1000	74
FZT705	28	ZC835B	40	ZR285-2.5	61
FZT717	13	ZC836B	40	ZR4040-2.5	61
FZT749	15	ZC930	39	ZR4040-4.1	61
FZT751	22	ZC931	39	ZR4040-5	61
FZT753	23	ZC932	39	ZR431	59
FZT755	25	ZC933	39	ZR431L	59
FZT757	27	ZC933A	39	ZRB500	60
FZT758	27	ZC934	39	ZRC250	60
FZT788B	14	ZC934A	39	ZRC330	60
FZT789A	15	ZDT1048	30	ZRC400	60
FZT790A	18	ZDT1049	30	ZRC500	60
FZT792A	22	ZDT1053	30	ZSD100	74
FZT795A	25	ZDT6718	30	ZSM300	73
FZT796A	25	ZDT6753	29	ZSM560	73
FZT849	16	ZDT6790	29	ZSR300	65
FZT851	20	ZDT694	30	ZSR330	65
FZT853	21	ZDT749	30	ZSR500	65
FZT855	24	ZDT751	30	ZSR1000	65
FZT857	26	ZDT795A	30	ZTL431	59
FZT869	12	ZHB6718	29	ZTL432	59
FZT948	14	ZHB6790	29	ZTX1048A	10
FZT949	18	ZHB6792	29	ZTX1049A	12
FZT951	22	ZHCS1000	38	ZTX1051A	16
FZT953	23	ZHCS1006	38	ZTX1053A	20
FZT955	25	ZHCS2000	38	ZTX1147A	13
FZT956	25	ZHCS350	38	ZTX1149A	15
FZT957	27	ZHCS400	38	ZTX415	28
FZT958	27	ZHCS500	38	ZTX449	16
FZT968	13	ZHCS506	38	ZTX450	17
FZTA14	28	ZHCS750	38	ZTX451	20



ZTX453	21	ZUMT491	20	ZVP3306F	46
ZTX455	24	ZUMT591	22	ZVP3310A	49
ZTX457	26	ZUMT617	10	ZVP3310F	49
ZTX458	26	ZUMT618	11	ZVP4105A	44
ZTX549	18	ZUMT619	17	ZVP4424A	50
ZTX550	19	ZUMT717	13	ZVP4424G	50
ZTX551	22	ZUMT718	15	ZVP4424Z	50
ZTX553	23	ZUMT720	19	ZVP4525E6	50
ZTX558	27	ZVN0124A	49	ZVP4525G	50
ZTX560	27	ZVN0545A	49	ZVP4525Z	50
ZTX601	28	ZVN0545G	49	ZX3CD1S1M832	31
ZTX601B	28	ZVN2106A	45	ZX3CD2S1M832	31
ZTX603	28	ZVN2106G	45	ZX3CD3S1M832	31
ZTX605	28	ZVN2110A	48	ZX3CDBS1M832	31
ZTX614	28	ZVN2110G	48	ZX5T2E6	14
ZTX618	11	ZVN2120A	49	ZX5T3Z	18
ZTX649	12	ZVN2120G	49	ZX5T851A	20
ZTX651	20	ZVN3306A	45	ZX5T851G	20
ZTX653	21	ZVN3306F	45	ZX5T853G	21
ZTX657	26	ZVN3310A	48	ZX5T853Z	21
ZTX658	26	ZVN3310F	48	ZX5T949G	18
ZTX688B	10	ZVN3320A	49	ZX5T951G	22
ZTX689B	11	ZVN3320F	49	ZX5T953G	23
ZTX690B	17	ZVN4106F	45	ZX5T955G	25
ZTX692B	20	ZVN4206A	45	ZX5T955Z	25
ZTX694B	24	ZVN4206AV	45	ZX5T1951G	22
ZTX696B	24	ZVN4206G	45	ZXCL250	67
ZTX705	28	ZVN4206GV	45	ZXCL280	67
ZTX718	14	ZVN4210A	48	ZXCL300	67
ZTX749	15	ZVN4210G	48	ZXCL330	67
ZTX751	22	ZVN4306A	45	ZXCL5213V25	67
ZTX753	23	ZVN4306AV	45	ZXCL5213V28	67
ZTX757	27	ZVN4306G	45	ZXCL5213V30	67
ZTX758	27	ZVN4306GV	45	ZXCL5213V33	67
ZTX788A	14	ZVN4310A	48	ZXCT1008	54
ZTX788B	14	ZVN4310G	48	ZXCT1009	54
ZTX789A	15	ZVN4424A	49	ZXCT1010	54
ZTX790A	19	ZVN4424G	49	ZXCT1011	54
ZTX792A	22	ZVN4424Z	49	ZXCT1012	54
ZTX795A	25	ZVN4525E6	49	ZXCT1020	54
ZTX796A	25	ZVN4525G	49	ZXCT1021	56
ZTX849	16	ZVN4525Z	49	ZXCT1022	56
ZTX851	20	ZVNL110A	48	ZXCT1030	56
ZTX853	21	ZVNL110G	48	ZXCT1032	56
ZTX855	24	ZVNL120A	49	ZXCT1041	56
ZTX857	26	ZVNL120G	49	ZXCT1050	54
ZTX869	12	ZVP0545A	50	ZXCT1051	56
ZTX948	14	ZVP0545G	50	ZXCT1080	56
ZTX949	18	ZVP1320F	50	ZXCT1081	56
ZTX951	22	ZVP2106A	46	ZXGD3001E6	32
ZTX953	23	ZVP2106G	46	ZXGD3002E6	32
ZTX955	25	ZVP2110A	49	ZXGD3003E6	32
ZTX956	25	ZVP2110G	49	ZXGD3004E6	32
ZTX957	27	ZVP2120A	50	ZXLD1601	69
ZTX958	27	ZVP2120G	50	ZXLD1615	69
ZTX968	13	ZVP3306A	46	ZM33164-3	73

ZXM41N10F48	ZXMN2F34FH42	ZXMP6A13F46
ZXM61N02F42	ZXMN2F34MA42	ZXMP6A13G46
ZXM61N03F43	ZXMN3A01E643	ZXMP6A16DN846
ZXM61P02F42	ZXMN3A01F43	ZXMP6A16K46
ZXM61P03F44	ZXMN3A02X843	ZXMP6A17DN846
ZXM62N02E642	ZXMN3A03E643	ZXMP6A17E646
ZXM62N03G43	ZXMN3A04DN843	ZXMP6A17G46
ZXM62P02E642	ZXMN3A04K43	ZXMP6A18DN846
ZXM62P03E644	ZXMN3A06DN843	ZXMP6A18K46
ZXM62P03G44	ZXMN3A14F43	ZXMP7A17G46
ZXM64N02X42	ZXMN3AM83243	ZXMP7A17K46
ZXM64N035L343	ZXMN3B01F43	ZXMS6001G47
ZXM64P02X42	ZXMN3B14F43	ZXMS6002G47
ZXM64P035L344	ZXMN3F30FH43	ZXMS6003G47
ZXM64P03X44	ZXMN3F318DN843	ZXMS6004FF47
ZXMC3A17DN844	ZXMN3F31DN843	ZXMS6005G47
ZXMC3AM83244	ZXMN3G32DN843	ZXRE06059
ZXMC3F31DN844	ZXMN4A06G43	ZXRE100460
ZXMC4559DN846	ZXMN4A06K43	ZXRE12560
ZXMC4A16DN844	ZXMN6A07F45	ZXRE404161
ZXMC6A09DN846	ZXMN6A07Z45	ZXSB1000QT839
ZXMD63C02X43	ZXMN6A08E645	ZXSBMR16PT839
ZXMD63C03X44	ZXMN6A08G45	ZXSC10070
ZXMD63N02X42	ZXMN6A09DN845	ZXSC41070
ZXMD63N03X43	ZXMN6A09G45	ZXSC42070
ZXMD63P02X42	ZXMN6A09K45	ZXSC44070
ZXMD63P03X44	ZXMN6A11DN845	ZXSD500E638
ZXMHC10A07T849	ZXMN6A11G45	ZXSDS2M83238
ZXMHC3A01T844	ZXMN6A11Z45	ZXT1053AK20
ZXMHC6A07T846	ZXMN6A25DN845	ZXT10N15DE610
ZXMHN6A07T846	ZXMN6A25G45	ZXT10N20DE611
ZXMN0545FF49	ZXMN6A25K45	ZXT10N50DE617
ZXMN0545G449	ZXMN6A25N845	ZXT10P12DE613
ZXMN10A07F48	ZXMN7A11G45	ZXT10P20DE615
ZXMN10A07Z48	ZXMN7A11K45	ZXT10P40DE619
ZXMN10A08DN848	ZXMP10A13F49	ZXT11N15DF10
ZXMN10A08E648	ZXMP10A16K49	ZXT11N20DF11
ZXMN10A08G48	ZXMP10A17E649	ZXT12N20DX30
ZXMN10A09K48	ZXMP10A17K49	ZXT12N50DX30
ZXMN10A11G48	ZXMP10A18G49	ZXT12P12DX30
ZXMN10A11K48	ZXMP10A18K49	ZXT12P40DX30
ZXMN10A25G48	ZXMP2120E550	ZXT13N15DE610
ZXMN10A25K48	ZXMP2120FF50	ZXT13N20DE611
ZXMN10B08E648	ZXMP2120G450	ZXT13N50DE617
ZXMN20866DE642	ZXMP3A13F44	ZXT13P12DE613
ZXMN2A01E642	ZXMP3A16DN844	ZXT13P20DE614
ZXMN2A01F42	ZXMP3A16G44	ZXT13P40DE618
ZXMN2A02X842	ZXMP3A16N844	ZXT1M32213
ZXMN2A03E642	ZXMP3A17DN844	ZXT2M32214
ZXMN2A04DN842	ZXMP3A17E644	ZXT3M32218
ZXMN2A14F42	ZXMP3F30FH44	ZXT4M32222
ZXMN2AM83242	ZXMP3F36N844	ZXT690BK16
ZXMN2B01F42	ZXMP3F37DN844	ZXT790AK18
ZXMN2B03E642	ZXMP3G35N844	ZXT849K16
ZXMN2B14FH42	ZXMP4A16G44	ZXT951K22
ZXMN2F30FH42	ZXMP4A16K44	ZXT953K23

ZXTAM322.....	10	ZXTN25015DFH.....	10	ZXTP2039F	22
ZXTBM322.....	11	ZXTN25020BFH.....	11	ZXTP2041F	19
ZXTC2045E6.....	29	ZXTN25020CFH.....	11	ZXTP23015CFH	13
ZXTC2061E6.....	29	ZXTN25020DFH.....	11	ZXTP23140BFH	25
ZXTC2062E6.....	29	ZXTN25020DFL.....	11	ZXTP25012EFH	13
ZXTC2063E6.....	29	ZXTN25020DG.....	11	ZXTP25012EZ	13
ZXTCM322.....	17	ZXTN25020DZ	11	ZXTP25015DFH	13
ZXTD09N50DE6.....	30	ZXTN25040DFH.....	16	ZXTP25020BFH	14
ZXTD1M832	30	ZXTN25040DFL.....	16	ZXTP25020CFF	14
ZXTD2M832	30	ZXTN25040DZ.....	16	ZXTP25020CFH	14
ZXTD2075E6.....	30	ZXTN25050DFH.....	17	ZXTP25020DFH	14
ZXTD4591AM832.....	29	ZXTN25060BFH.....	20	ZXTP25020DFL.....	15
ZXTD4591E6.....	29	ZXTN25060BZ	20	ZXTP25020DG	14
ZXTD6717E6.....	29	ZXTN25100BFH.....	21	ZXTP25020DZ.....	14
ZXTDAM832.....	30	ZXTN25100DFH.....	21	ZXTP25040DFH	18
ZXTDA1M832.....	29	ZXTN5551EFL.....	24	ZXTP25040DFL.....	19
ZXTDBM832.....	30	ZXTN5551EG	24	ZXTP25040DZ.....	18
ZXTDB2M832.....	29	ZXTN5551EZ.....	24	ZXTP25060BFH	22
ZXTDCM832.....	30	ZXTN5551FL.....	24	ZXTP25100BFH	23
ZXTDC3M832.....	29	ZXTN5551G	24	ZXTP25100CFH	23
ZXTDE4M832.....	29	ZXTN5551Z.....	24	ZXTP25100CZ	23
ZXTEM322.....	21	ZXTP05120HFF.....	28	ZXTP25140BFH	25
ZXTN04120HFF	28	ZXTP03200BG	25		
ZXTN07012EFF.....	10	ZXTP5401EFL	25		
ZXTN07045EFF.....	16	ZXTP5401EG	25		
ZXTN08400BFF	26	ZXTP5401EZ	25		
ZXTN19020CFF	10	ZXTP5401FL	25		
ZXTN19020DFF	11	ZXTP5401G	25		
ZXTN19020DG.....	10	ZXTP5401Z	25		
ZXTN19020DZ.....	11	ZXTP07012EFF	13		
ZXTN19055DZ.....	20	ZXTP07040DFF.....	18		
ZXTN19060CFF	20	ZXTP08400BFF	27		
ZXTN19060CG.....	20	ZXTP19020CFF	14		
ZXTN19100CFF	21	ZXTP19020DFF	14		
ZXTN19100CG.....	21	ZXTP19020DG	14		
ZXTN19100CZ.....	21	ZXTP19020DZ	14		
ZXTN19100DG.....	21	ZXTP19060CFF	22		
ZXTN19100DZ.....	21	ZXTP19060CG	22		
ZXTN2005G	12	ZXTP19060CZ	22		
ZXTN2005Z	12	ZXTP19100CFF	23		
ZXTN2007G	16	ZXTP19100CG	23		
ZXTN2007Z	16	ZXTP19100CZ	23		
ZXTN2010A	20	ZXTP2006E6	14		
ZXTN2010G	20	ZXTP2008G	18		
ZXTN2010Z	20	ZXTP2008Z	18		
ZXTN2011G	21	ZXTP2009Z	18		
ZXTN2011Z	21	ZXTP2012A	22		
ZXTN2018F	20	ZXTP2012G	22		
ZXTN2020F	21	ZXTP2012Z	22		
ZXTN2031F	17	ZXTP2013G	23		
ZXTN2038F	20	ZXTP2013Z	23		
ZXTN2040F	16	ZXTP2014G	25		
ZXTN23015CFH.....	10	ZXTP2014Z	25		
ZXTN25012EFF.....	10	ZXTP2025F	19		
ZXTN25012EFL.....	10	ZXTP2027F	22		
ZXTN25012EZ.....	10	ZXTP2029F	23		

