


Part Number: SL32 2R025

Ordering Different Lead Types:

Inside Kinked Leads	Not available
Outside Kinked Leads	Use -B after Ametherm's Part #

For example: to order an outside kinked lead use part number SL32 2R025-B

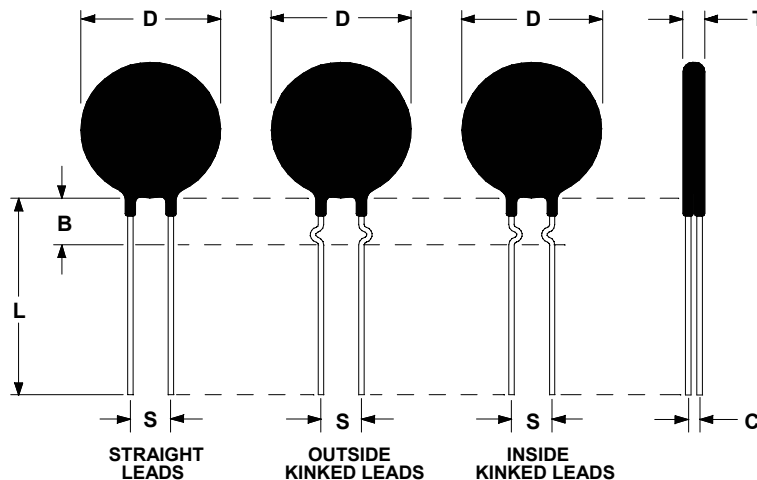

Resistance @ 25°C	2.0 Ω ± 15%
Max Steady State Current Up to 65°C	25.0 A
Max Recommended Energy Rating	300.0 J
Actual Failure Point of Instantaneous Energy	548.0 J
Resistance @ 100 % of Maximum Current	0.024 Ω
Resistance @ 50% of Maximum Current	0.055 Ω
Body Temperature at Maximum Current	236 °C
Dissipation Constant	45.4 mW/°C
Thermal Time Constant	194 seconds
Material Type	"G"
Maximum Capacitance @ 120/240/440 VAC	20000µF/ 5000 µF/ 1500 µF

D	30.0 ± 2.5 mm
T	6.35 mm NOM
Lead Diameter	1.0 ± 0.1 mm
S	7.8 ± 2.0 mm
L	38.0 ± 9.0 mm
Coating Run Down Straight Leads	5.0 ± 1.0 mm
B	7.8 mm Nom
C	3.82 ± 1.0 mm

CA File# 110861

Revision Date: April 26, 2005

Ametherm, Inc. 3111 N. Deer Run Road #4 Carson City, NV 89701
Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670
www.ametherm.com