

Features

LED DRIVER

- 20W Class II AC-DC LED Power Supply
- 2x 350mA Independent Constant Current Outputs
- Or 1x 700mA Output (Jumper selectable)
- 1-10V or Rheostat Dimmable (10%~100%)
- Universal AC Input
- Active Power Factor Correction >0.95
- Fused Input, Protected Outputs
- 3kVAC Isolation
- CE Marked, UL Pending
- Low Cost
- Long 5 Year Warranty

Description

A compact 20W constant current switching power module suitable for driving either two independent strings of 1~10 high power 350mA LEDs or a single string of 1~10 high power 700mA LEDs (mode selection is via a jumper under the output cover plate). When used in 350mA mode, the two outputs are independently regulated and can be used with asymmetric LED loads. The output current can be dimmed using either an external 150kOhm rheostat or via a 1-10V external voltage. Active power factor correction is standard. Connections are via screw terminals and the AC input feature loop-through connections to allow daisy-chaining of the converters.

Selection Guide

Part Number	Input Voltage Range (Nominal VAC)	Input Current at full load (mA)	Output Voltage Range (VDC)	Output Current (mA)	Max # LEDs
RACD20-350D (700mA single output mode)	230VAC	260	2x (3-34) 3-34	2x (35~350) 70~700	2x (10 x 1W) 10 x 3W
RACD20-350D-US (700mA single output mode)	110VAC	510	2x (3-34) 3-34	2x (35~350) 70~700	2x (10 x 1W) 10 x 3W

Specifications (typical at 25°C and after warm up time unless otherwise specified)

Input Voltage Range	230VAC	220-264VAC
	110VAC	100-130VAC
Rated Power		20 Watts max.
Input Frequency Range		47-63 Hz
Power Factor	Full Load, 115VAC/230VAC	0.95
Output Voltage Range	350mA Dual Output Mode	3-34VDC + 3-34VDC
	700mA Single Output Mode	3-34VDC
Inrush Current (<2mS)	115VAC/230VAC	10A max.
Input Current	230VAC, Full Load	260mA typ.
Leakage Current	115VAC/240VAC - 60/50Hz	0.5mA typ.
Input Fuse	115VAC/230VAC	T2A/T1A
Output Current Accuracy	(combined Tolerance, load Regulation and Line Regulation)	±10%
Minimum Load	Open Circuit Protected	1 LED
Output Ripple		150mA max.
Hold Up Time		18ms min.
Operating Frequency		40 - 100 kHz typ.
Efficiency at Full Load	230VAC	>80%
RMS Isolation Voltage (input to output)		3kVAC / 1 minute
Temperature Coefficient		±0.02%/°C typ.
Overload Protection		120% typ.
Short Circuit Protection		Continuous Current Limit
Dimming Control	Rheostat (10%~100%)	0-150kOhm
	External Voltage (10%-100%)	1-10VDC

continued on next page

LIGHTLINE
DC/DC-Converter
with 5 year Warranty

RECOM

20 Watt PFC
Single/Dual
Dimmable



UL-8750 Pending
EN 61347 Certified

RACD20-D

RACD20-D

LIGHTLINE

AC/DC-Converter


RACD20

Specifications cont. (typical at 25°C and after warm up time unless otherwise specified)

Overtemperature Protection	Shutdown, Automatic restart after cooling down	
Operating Temperature Range (free air convection)	Ambient Temperature	-20°C to +40°C
	Case Temp.	85°C max.
Weight	140g	
Packing Quantity	1pc	
Storage Temperature Range	-40°C to +100°C	
Humidity	95% RH max.	
IP Rating	IP20, Indoor Use Only	
PCB Material	Plastic Resin with Fibreglass (UL94V-0)	
Case Material	Plastic	
Designed to meet Standards	Electrical Lighting, EMC Emissions	EN55015:2006 + A1: 2007 + A2:2009
	Limits for Harmonics Emissions	EN 61000-3-2:2006
	EMC Compatibilty: Flicker and Voltage Variations	EN 61000-3-3:2006
	Electrical Lighting: EMC Immunity	EN 61547:1995 + A1:2000
	Class II Power Supply Safety	UL1310
	FCC	FCC18A
THD	<20%	
Certifications	LED Lighting Safety	designed to meet UL8750
	SEMKO CE Certification, General Safety	EN 61347-1: 2008
	SEMKO CE Certification, Safety of AC supplied Control Gear for LED Modules	EN 61347-2-13: 2006
Design Lifetime	25°C ambient	>70 x 10 ³ hours in operation
Connections	AC Input	Screw terminal
	AC Output (loop through)	Screw terminal
	LED Outputs	Screw Terminal*

* Do not connect or disconnect the LED load while the converter is on. This may damage the LED or reduce its life.

Package Style and Pinning

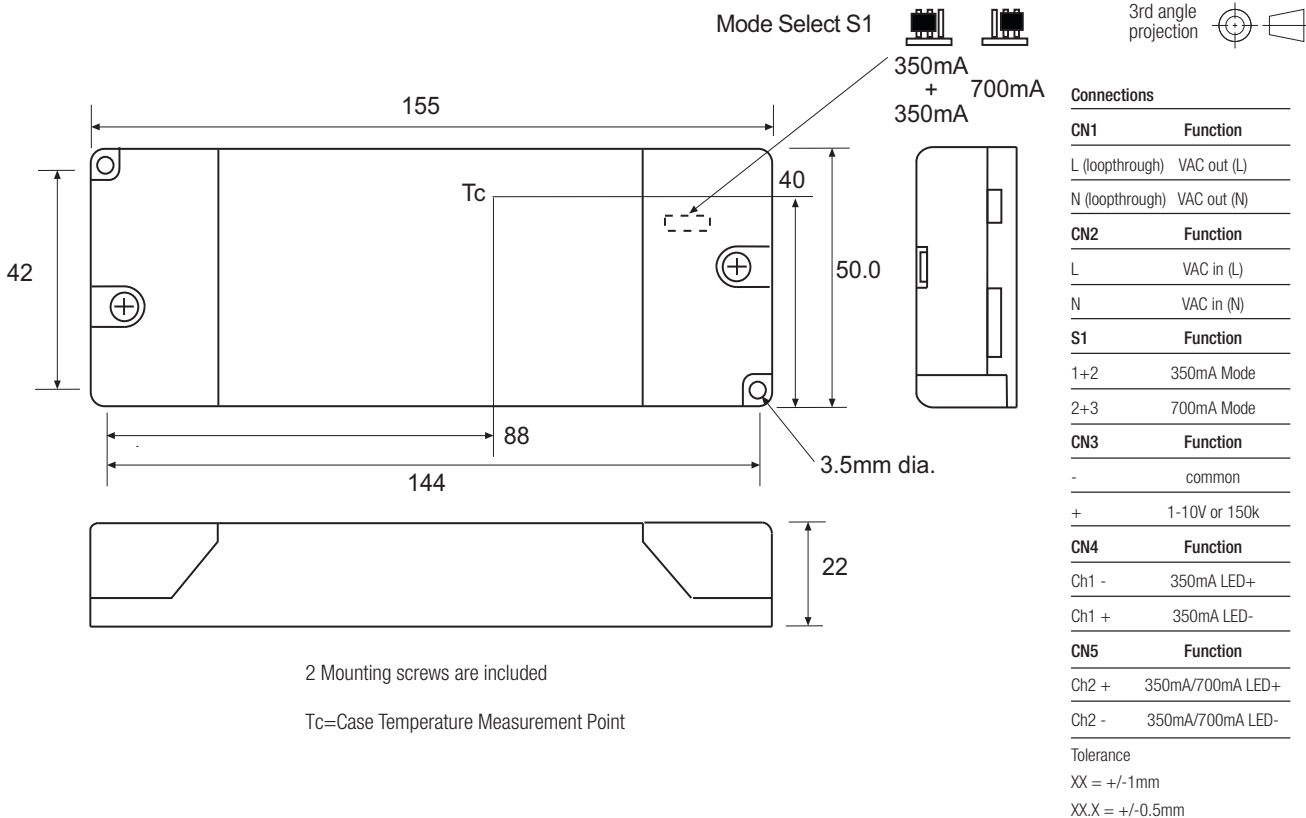

RACD20-D