


**Models 7039  
BNC (M) 50 Ω Crimp/Captive 58,58A,58C,141,141A**



Model 7039 BNC (M) 50 Ω Crimp/Captive

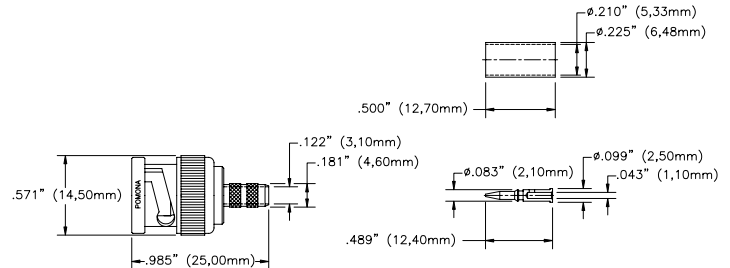

Use for your 50 Ω coax cable assembly applications.

**Features**

- Designed for common cable types (see table on page 2 for cable types and crimp die information).
- Precision machined.
- Gold plated (15 micro-inches) contacts.
- Insulation material is PTFE (**not delrin**).

**Materials**

- Body is machined brass with tarnish resistant nickel plating.
- Male center pin contacts are gold-plated (15 micro-inches) brass.
- Body made from precision machined high quality brass (not die cast).
- High quality machined PTFE dielectric.

**Specifications**

Nominal impedance	50 Ω
Frequency	0-4 GHz
VSWR	1.30 max. 0-4 GHz
Center / Outer contact resistance	1.5 / 1.0 mΩ
Number of insertions	500
Insulation resistance	5000 MΩ (min)
Dielectric withstand voltage	1500 Vrms
Ratings: Voltage: 500 Vrms Operating temperature: -85 °F to +131 °F (-65 °C to +155 °C) Max.	

**Ordering Information**

Model: 7039 BNC (M) 50 Ω Crimp/Captive 58, 58A, 58C, 141, 141A .

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 International: 425-446-5500

e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

**Models 7039  
BNC (M) 50 Ω Crimp/Captive 58,58A,58C,141,141A**

**Cable Type and Crimp Die Set Information**

Connector Model #	Cable Groups	Crimp Die set* Size (Hex/Pin)
7039	RG58, 58A, 58C, 141, 141A	Model 7278 (.213 / .068)

\*For use with Pomona crimp tool Model 7277.

**Cable Assembly Instructions**


1. CUT CABLE END EVENLY AND PERPENDICULAR



2. SLIDE OUTER FERRULE OVER CABLE END.




3. STRIP CABLE JACKET, BRAID, AND DIELECTRIC TO SPECIFICATION LENGTHS. (NOTE: FOIL AND BRAID CABLES SHOULD LEAVE FOIL TO END OF DIELECTRIC).




RECOMMENDED STRIP LENGTHS FOR MODEL 7039


4. INSERT CONTACT PIN ONTO CABLE'S CENTER CONDUCTOR SO THAT IT IS FLUSH TO DIELECTRIC, CRIMP OR SOLDER CONTACT FIRMLY.




5. FLARE BRAID END SLIGHTLY.




6. INSERT PIN-END INTO CONNECTOR BODY AND PUSH UNTIL IT CLICKS INTO PLACE.



7. SLIDE OUTER FERRULE OVER BRAID AND UP AGAINST BODY ASSEMBLY.



8. CRIMP OUTER FERRULE WITH APPROPRIATE CRIMP TOOL.



USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 International: 425-446-5500

e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.