

Specification Status: Released


Maximum Operating Voltage: 250V_{DC}

Fault Ratings at 20°C:
250V_{AC}, 3A, 10 applications
600V_{AC}, 40A, 1 application

Additional Info at 20°C:

- Resistance matched: 0.5 Ohm
- Lightning withstand: TIA-968-A
- Helps equipment meet UL60950 (UL1459)

Lead Material:
22 AWG Tin-Plated Copper (0.64 mm [0.025"] nominal diameter)

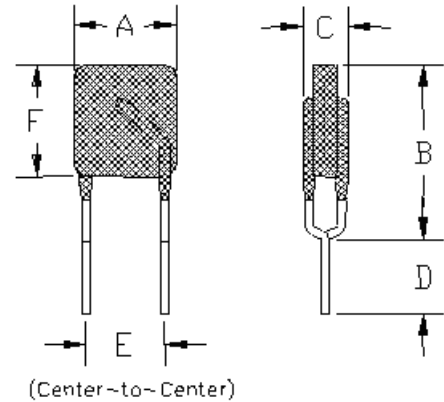

Marking:

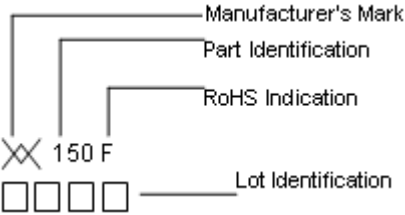


TABLE I. DIMENSIONS:

	A		B		C		D		E	F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	NOM	MIN	MAX
mm:	--	9.0	--	12.5	--	4.6	4.7	--	5.0	--	9.0
in:*	--	(0.35)	--	(0.49)	--	(0.18)	(0.19)	--	(0.20)	--	(0.35)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS @ 20°C (as measured in Loranger sockets P/N 02901-032-6218A):

HOLD CURRENT (A)	TRIP CURRENT (A)	RESISTANCE (Ω)			TIME TO TRIP(Sec) @ 1A		OPERATING TEMPERATURE (°C)		TRIPPED POWER DISSIPATION (W) @ 250V _{DC}	
		R MIN	R MAX	R _{1 MAX} *	TYP	MAX	MIN	MAX	TYP	MAX
0.150	0.300	6.0	10.0	17.0	1.4	4.0	-40	85	1.4	1.8

*Maximum device resistance at 20°C measured 1 hour post trip.

TABLE III. APPLICABLE PART DESCRIPTIONS:

PART DESCRIPTION	PACKAGING TYPE	NOTES
TRF600-150-B-0.5	Bulk	N/A
TRF600-150-B-0.5-2	Tape and Reel	Dim D not applicable

Agency Recognitions: UL (File # E74889), CSA (File #CA-78165-7), TUV
 Reference Documents: Raychem PS300, PS500, UL60950, TIA-968A, GR1089
 Precedence: This specification takes precedence over documents referenced herein.1.9
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC
Compliant

Directive 2000/53/EC
Compliant

