



flat cable clamp



WITH ADHESIVE MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by peeling protective paper strip from base and pressing into place. Nine sizes accommodate all flat cables up to 50-conductor width.



| PART No. | w/o Adhesive | A | B | C | D | E | IMPEDANCE IN OHMS | |
|-----------|--------------|-----------|------------|------------|----------|------------|-------------------|--|
| FA28B0071 | FC28B0071 | .520 13,2 | 1.244 31,6 | .750 19,1 | .060 1,5 | .510 13,0 | 49 @ 100 MHz | |
| FA28B0121 | FC28B0121 | .520 13,2 | 1.790 45,5 | .750 19,1 | .060 1,5 | 1.010 25,7 | 97 @ 100 MHz | |
| FA28B1240 | FC28B1240 | .520 13,2 | 1.790 45,5 | 1.125 28,6 | .040 1,0 | 1.020 25,9 | 250 @ 100MHz | |
| FA28B1265 | | .520 13,2 | 1.790 45,5 | 1.125 28,6 | .038 1,0 | 1.047 26,6 | 148 @ 100MHz | |
| FA28B1729 | FC28B1729 | .800 20,3 | 2.430 61,7 | 1.125 28,6 | .060 1,5 | 1.355 34,4 | 200 @ 100 MHz | |
| FA28B2265 | | .520 13,2 | 3.810 80,8 | 1.125 28,6 | .038 1,0 | 2.047 52,0 | 154 @ 100 MHz | |
| FA28B2375 | FC28B2375 | .800 20,3 | 3.180 80,8 | 1.050 26,7 | .060 1,5 | 1.720 43,7 | 195 @ 100 MHz | |
| FA28B2480 | FC28B2480 | .800 20,3 | 3.180 80,8 | 1.125 28,6 | .060 1,5 | 2.047 52,0 | 250 @ 100 MHz | |
| FA28B3012 | FC28B3012 | .800 20,3 | 3.700 94,0 | 1.125 28,6 | .060 1,5 | 2.540 64,5 | 286 @ 100 MHz | |

flat cable clamp



WITH SINGLE PRESS FIT MOUNT. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fastener into a .250" (6,4mm) diameter hole. Seven sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.



| PART No. | A | B | C | D | E | F | G | IMPEDANCE IN OHMS |
|-----------|-----------|------------|------------|----------|----------|------------|----------|-------------------|
| FF28B0121 | .475 12,7 | 1.790 45,5 | .750 19,1 | .325 8,3 | .240 6,1 | 1.010 25,7 | .060 1,5 | 97 @ 100MHz |
| FF28B1240 | .475 12,7 | 1.790 45,5 | 1.125 28,6 | .325 8,3 | .240 6,1 | 1.020 25,9 | .040 1,0 | 250 @ 100MHz |
| FF28B1265 | .475 12,7 | 1.790 45,5 | 1.125 28,6 | .325 8,3 | .240 6,1 | 1.047 26,6 | .038 1,0 | 148 @ 100MHz |
| FF28B1729 | .800 20,3 | 2.430 61,7 | 1.125 28,6 | .280 7,1 | .183 4,6 | 1.355 34,4 | .060 1,5 | 200 @ 100MHz |
| FF28B2375 | .800 20,3 | 3.180 80,8 | 1.050 26,7 | .280 7,1 | .183 4,6 | 1.720 43,7 | .060 1,5 | 195 @ 100MHz |
| FF28B2480 | .800 20,3 | 3.180 80,8 | 1.125 28,6 | .280 7,1 | .183 4,6 | 2.047 52,0 | .060 1,5 | 250 @ 100MHz |
| FF28B3012 | .800 20,3 | 3.700 94,0 | 1.125 28,6 | .280 7,1 | .183 4,6 | 2.540 64,5 | .060 1,5 | 286 @ 100MHz |

flat cable clamp



WITH DUAL PRESS FIT MOUNTS. Ferrite assembly bonded in nylon mounting clamp; easily installed by pressing the integral spring tab fasteners into two .219" (5,6mm) diameter holes. Three sizes accommodate all flat cables up to 50-conductor width. Fits substrates up to .070" (1,8mm) thickness.

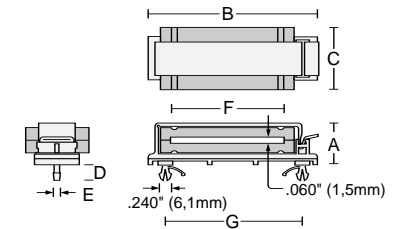

| PART No. | A | B | C | D | E | F | G | IMPEDANCE IN OHMS |
|-----------|-----------|------------|------------|----------|----------|------------|------------|-------------------|
| FD28B2375 | .800 20,3 | 3.180 80,8 | 1.050 26,7 | .280 7,1 | .183 4,6 | 1.720 43,7 | 2.550 64,8 | 195 @ 100MHz |
| FD28B2480 | .800 20,3 | 3.180 80,8 | 1.125 28,6 | .280 7,1 | .183 4,6 | 2.047 52,0 | 2.550 64,8 | 250 @ 100MHz |
| FD28B3012 | .800 20,3 | 3.700 94,0 | 1.125 28,6 | .280 7,1 | .183 4,6 | 2.540 64,5 | 2.550 64,8 | 286 @ 100MHz |

flat cable clamp



WITH SPLIT END CAPS, HARDWARE MOUNT. Ferrite assembly press-fitted into a pair of nylon end caps. Mounts using screws, push-rivets, or other hardware. Ten sizes accommodate flat cables up to 64-conductor width.

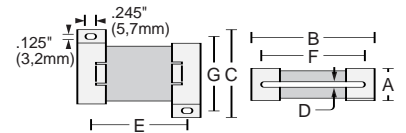

| PART No. | A | B | C | D | E | F | G | IMPEDANCE IN OHMS |
|-----------|-----------|-------------|------------|----------|------------|------------|------------|-------------------|
| SE28B0071 | .375 9,5 | .815 20,7 | 1.190 30,2 | .060 1,5 | .470 11,9 | .510 13,0 | .900 22,9 | 49 @ 100MHz |
| SE28B0121 | .375 9,5 | 1.315 33,4 | 1.190 30,2 | .060 1,5 | 1.000 25,4 | 1.000 25,7 | .900 22,9 | 97 @ 100MHz |
| SE28B0146 | .375 9,5 | 1.565 39,8 | 1.190 30,2 | .060 1,5 | 1.250 31,8 | 1.260 32,0 | .900 22,9 | 120 @ 100MHz |
| SE28B0221 | .375 9,5 | 2.315 58,8 | 1.190 30,2 | .060 1,5 | 2.000 50,8 | 2.010 51,1 | .900 22,9 | 176 @ 100MHz |
| SE28B1240 | .625 15,9 | 1.365 34,7 | 1.829 46,5 | .040 1,0 | .725 18,4 | 1.020 25,9 | 1.500 38,1 | 250 @ 100MHz |
| SE28B1729 | .625 15,9 | 1.849 47,0 | 1.829 46,5 | .060 1,5 | 1.300 33,0 | 1.355 34,4 | 1.500 38,1 | 200 @ 100MHz |
| SE28B2480 | .625 15,9 | 2.570 65,3 | 1.829 46,5 | .060 1,5 | 2.000 50,8 | 2.047 52,0 | 1.500 38,1 | 250 @ 100MHz |
| SE28B3012 | .625 15,9 | 3.125 79,4 | 1.829 46,5 | .060 1,5 | 2.550 64,8 | 2.540 64,5 | 1.500 38,1 | 286 @ 100MHz |
| SE28B3500 | .625 15,9 | 3.620 91,9 | 1.829 46,5 | .060 1,5 | 3.020 76,7 | 3.000 76,2 | 1.500 38,1 | 290 @ 100MHz |
| SE28B4340 | .625 15,9 | 4.460 113,3 | 1.829 46,5 | .104 2,6 | 3.875 98,4 | 3.240 82,3 | 1.500 38,1 | 325 @ 100MHz |

flat cable clamp

WITH SPLIT END CAPS, ADHESIVE MOUNT. Ferrite assembly press-fitted into a pair of nylon end caps with adhesive foam mounting pads. Ten sizes accommodate flat cables up to 64-conductor width.

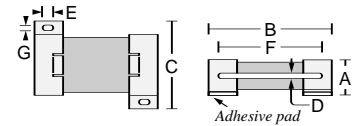

| PART No. | A | B | C | D | E | F | G | IMPEDANCE IN OHMS |
|-----------|-----------|-------------|------------|----------|----------|------------|----------|-------------------|
| SA28B0071 | .405 10,3 | .815 20,7 | 1.190 30,2 | .060 1,5 | .245 5,7 | .510 13,0 | .125 3,2 | 49 @ 100MHz |
| SA28B0121 | .405 10,3 | 1.315 33,4 | 1.190 30,2 | .060 1,5 | .245 5,7 | 1.010 25,7 | .125 3,2 | 97 @ 100MHz |
| SA28B0146 | .405 10,3 | 1.565 39,8 | 1.190 30,2 | .060 1,5 | .245 5,7 | 1.260 32,0 | .125 3,2 | 120 @ 100MHz |
| SA28B0221 | .405 10,3 | 2.315 58,8 | 1.190 30,2 | .060 1,5 | .245 5,7 | 2.010 51,1 | .125 3,2 | 176 @ 100MHz |
| SA28B1240 | .655 16,6 | 1.365 34,7 | 1.829 46,5 | .040 1,0 | .245 5,7 | 1.020 25,9 | .125 3,2 | 250 @ 100MHz |
| SA28B1729 | .655 16,6 | 1.849 47,0 | 1.829 46,5 | .060 1,5 | .245 5,7 | 1.355 34,4 | .125 3,2 | 200 @ 100MHz |
| SA28B2480 | .655 16,6 | 2.570 65,3 | 1.829 46,5 | .060 1,5 | .245 5,7 | 2.047 52,0 | .125 3,2 | 250 @ 100MHz |
| SA28B3012 | .655 16,6 | 3.125 79,4 | 1.829 46,5 | .060 1,5 | .245 5,7 | 2.540 64,5 | .125 3,2 | 286 @ 100MHz |
| SA28B3500 | .655 16,6 | 3.620 91,9 | 1.829 46,5 | .060 1,5 | .245 5,7 | 3.000 76,2 | .125 3,2 | 290 @ 100MHz |
| SA28B4340 | .655 16,6 | 4.460 113,3 | 1.829 46,5 | .104 2,6 | .245 5,7 | 3.240 82,3 | .125 3,2 | 325 @ 100MHz |