Dual N-Channel MOSFET Tetrode

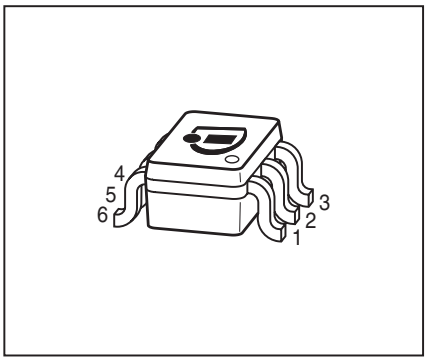

- Designed for input stages of 2 band tuners
- Two AGC amplifiers in one single package, with on-chip internal switch
- Only one switching line to control both FETs
- Integrated gate protection diodes
- Ultra low noise figure
- Excellent cross modulation at gain reduction
- Integrated ESD gate protection diodes
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

Detailed functional diagram on page 5

BG5412K



ESD (**E**lectro**s**tatic **d**ischarge) sensitive device, observe handling precaution!

Type	Package	Pin Configuration						Marking
BG5412K	SOT363	1=G1*	2=G2	3=G1**	4=D**	5=S	6=D*	K2s

* For amp. A; ** for amp. B
180° rotated tape loading orientation available

Downloaded from Elcodis.com electronic components distributor

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	8	V
Continuous drain current amp. A amp. B	I_D	 25 25	mA
Gate 1/ gate 2-source current	I_{G1S}, I_{G2S}	± 1	mA
Gate 1/ gate 2-source voltage	V_{G1S}, V_{G2S}	± 6	V
Total power dissipation $T_S \leq 94$ °C	P_{tot}	200	mW
Storage temperature	T_{stg}	-55 ... 150	°C
Channel temperature	T_{ch}	150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Channel - soldering point[1)]	R_{thchs}	≤ 280	K/W

[1]For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Downloaded from Elcodis.com electronic components distributor

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Drain-source breakdown voltage I_D = 100 µA, V_{G1S} = 0 , V_{G2S} = 0	$V_{(BR)DS}$	12	-	-	V
Gate1-source breakdown voltage $+I_{G1S}$ = 10 mA, V_{G2S} = 0 , V_{DS} = 0	$+V_{(BR)G1SS}$	6	-	15	
Gate2-source breakdown voltage $+I_{G2S}$ = 10 mA, V_{G1S} = 0 , V_{DS} = 0	$+V_{(BR)G2SS}$	6	-	15	
Gate1-source leakage current V_{G1S} = 6 V, V_{G2S} = 0 , V_{DS} = 0	$+I_{G1SS}$	-	-	50	nA
Gate2-source leakage current V_{G2S} = 8 V, V_{G1S} = 0	$+I_{G2SS}$	-	-	50	
Drain current V_{DS} = 5 V, V_{G1S} = 0 , V_{G2S} = 4 V	I_{DSS}	-	-	100	µA
Drain-source current V_{DS} = 5 V, V_{G2S} = 4 V, R_{G1} = 120 kΩ, amp. B V_{DS} = 5 V, V_{G2S}= 4 V, selfbiased, amp. A	I_{DSX}	 - -	 14 18	 - -	mA
Gate1-source pinch-off voltage V_{DS} = 5 V, V_{G2S} = 4 V, I_D = 100 µA	$V_{G1S(p)}$	-	0.7	-	V
Gate2-source pinch-off voltage V_{DS} = 5 V, I_D = 100 µA	$V_{G2S(p)}$	-	0.7	-	

Downloaded from Elcodis.com electronic components distributor

Electrical Characteristics at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics V_{DS} = 5 V, V_{G2} = 4 V, I_D = 10 mA (verified by random sampling)					
Forward transconductance	g_{fs}				mS
amp. A		-	33	-	
amp. B		-	30	-	
Gate1 input capacitance	C_{g1ss}				pF
amp. A		-	2.2	-	
amp. B		-	2	-	
Output capacitance	C_{dss}				
amp. A		-	0.9	-	
amp. B		-	0.8	-	
Power gain	G_p				dB
f= 800 MHz, amp. A		-	24	-	
f= 800 MHz, amp. B		-	24	-	
f= 45 MHz, amp. A		-	34	-	
f= 45 MHz, amp. B		-	31	-	
Noise figure	F				dB
f= 800 MHz, amp. A		-	1.1	-	
f= 800 MHz, amp. B		-	1.2	-	
f= 45 MHz, amp. A		-	0.8	-	
f= 45 MHz, amp. B		-	0.9	-	
Gain control range V_{G2S} = 4...0 V, *f* = 800 MHz	ΔG_p	-	45	-	
Cross-modulation *k*=1%, f_W=50MHz, f_{unw}=60MHz	X_{mod}				-
amp. A, *AGC* = 0 dB		-	97	-	
amp. B, *AGC* = 0 dB		-	96	-	
amp. A, *AGC* = 10 dB		-	94	-	
amp. B, *AGC* = 10 dB		-	91	-	
amp. A, *AGC* = 40 dB		-	105	-	
amp. B, *AGC* = 40 dB		-	103	-	

Downloaded from Elcodis.com electronic components distributor

Functional diagram

shows pinning of BG5412K, switching pin at PIN 3

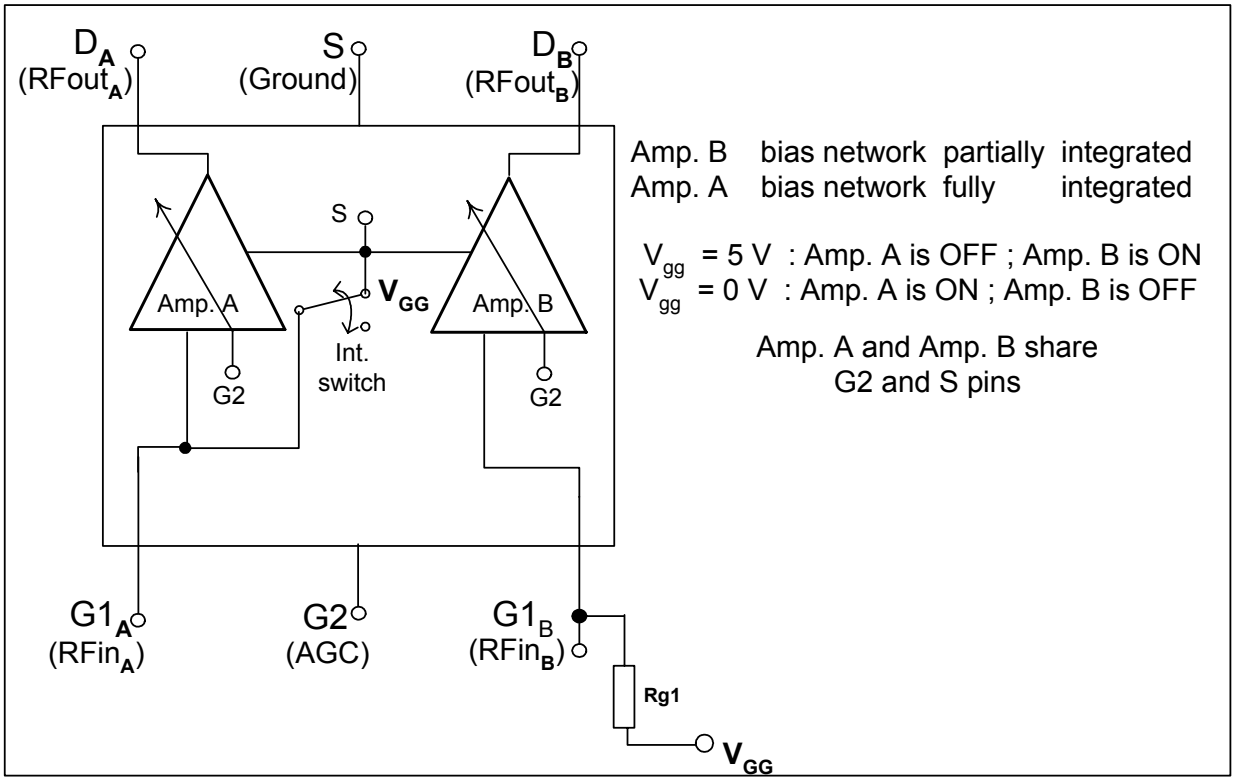

Downloaded from Elcodis.com electronic components distributor

Total power dissipation $P_{tot} = f(T_S)$

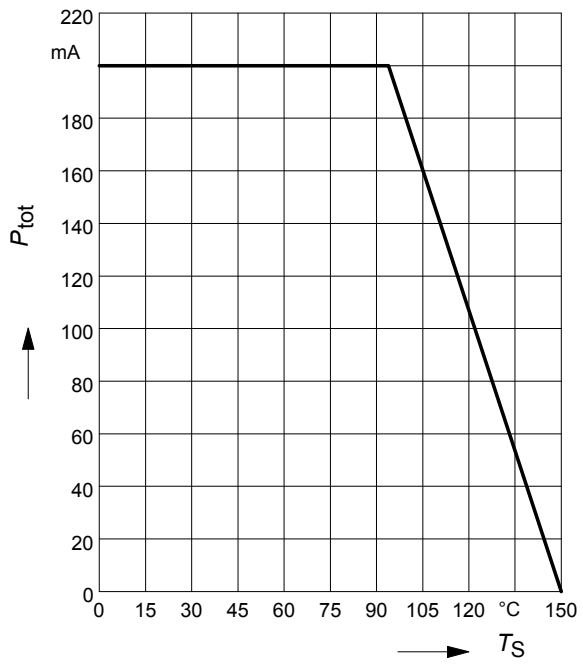

Drain current $I_D = f(I_{G1})$

V_{G2S} = 4V, amp. B

V_{DS}= 5 V

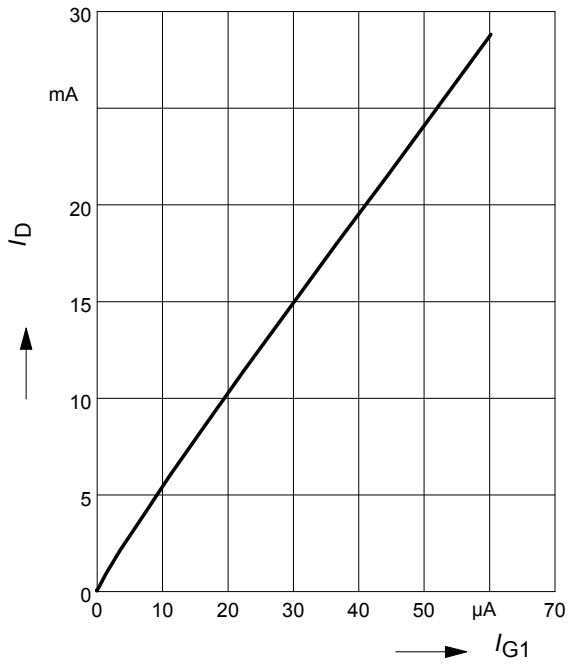

Output characteristics $I_D = f(V_{DS})$

V_{G2} = 4 V, amp. A

V_{G1} = Parameter

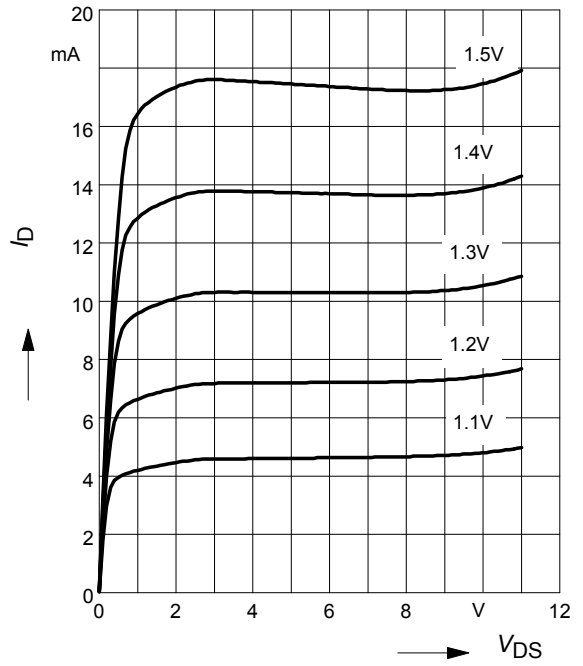

Output characteristics $I_D = f(V_{DS})$

V_{G2} = 4 V, amp. B

V_{G1} = Parameter

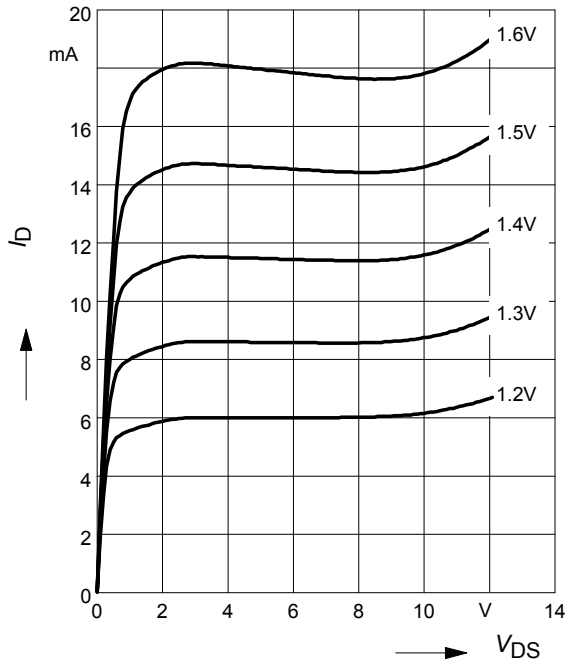

Downloaded from Elcodis.com electronic components distributor

Gate 1 current $I_{G1} = f(V_{G1S})$

V_{DS} = 5V

V_{G2S} = Parameter

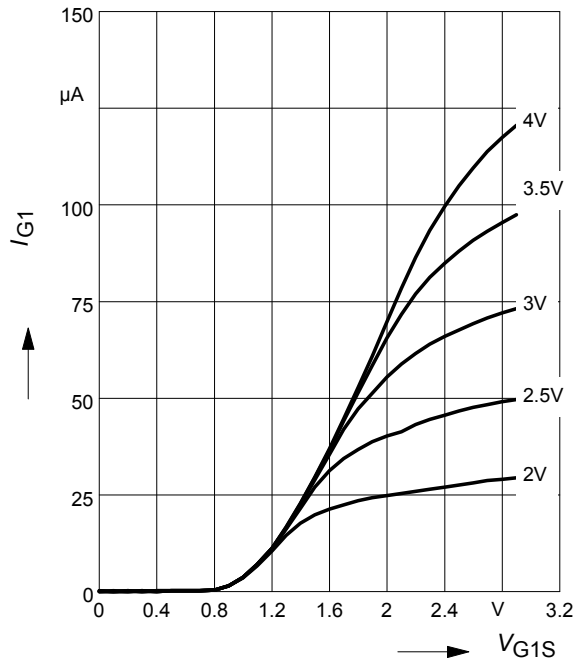

Gate 1 forward transconductance

$g_{fs} = f(I_D)$; amp.A

V_{DS} = 5V, V_{G2S} = Parameter

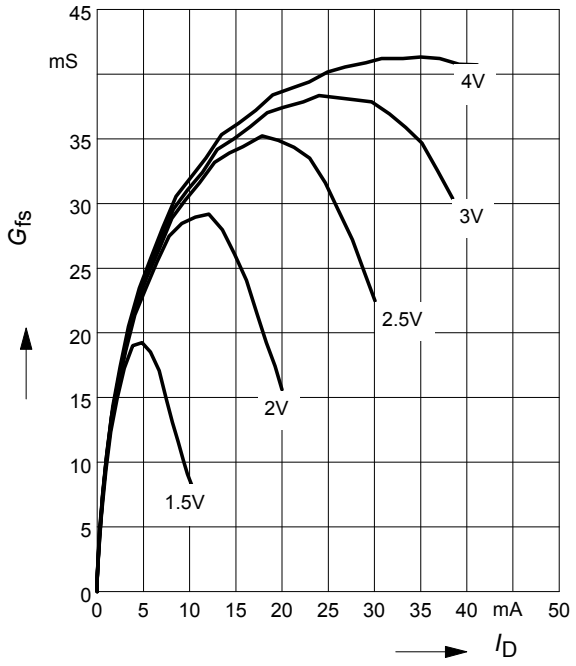

Gate 1 forward transconductance

$g_{fs} = f(I_D)$, amp. B

V_{DS} = 5V, V_{G2S} = Parameter

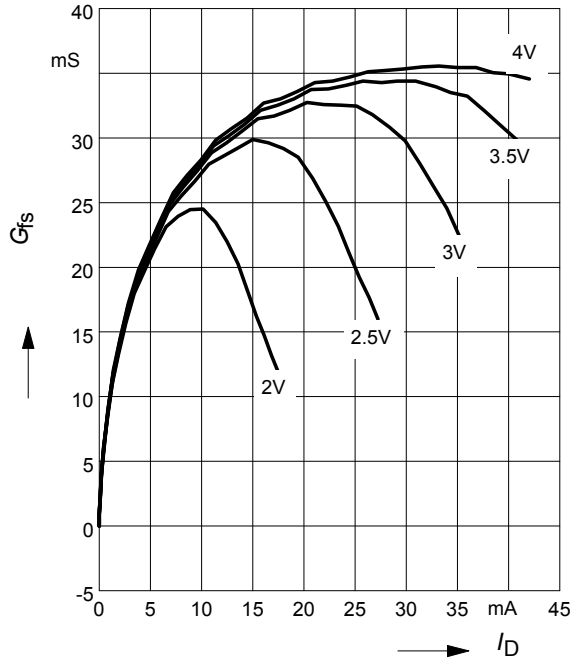

Drain current $I_D = f(V_{G1S})$

V_{DS} = 5V, amp. A

V_{G2S} = Parameter

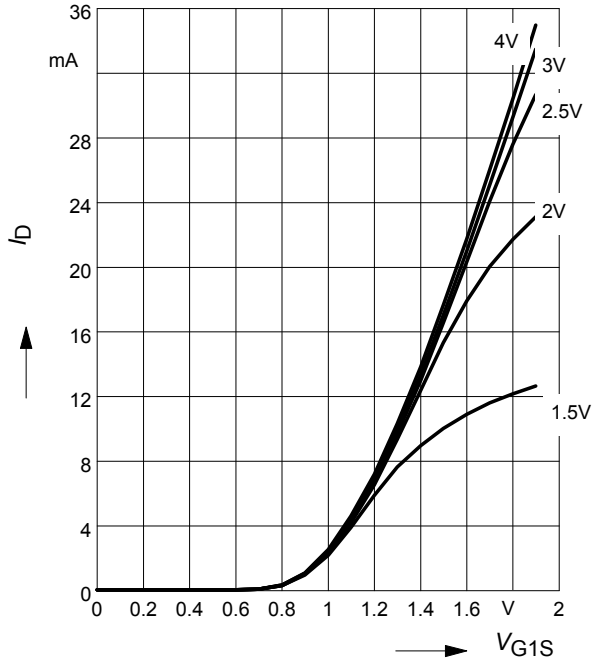

Downloaded from Elcodis.com electronic components distributor

Drain current $I_D = f(V_{G1S})$
V_{DS} = 5V, amp. B
V_{G2S} = Parameter

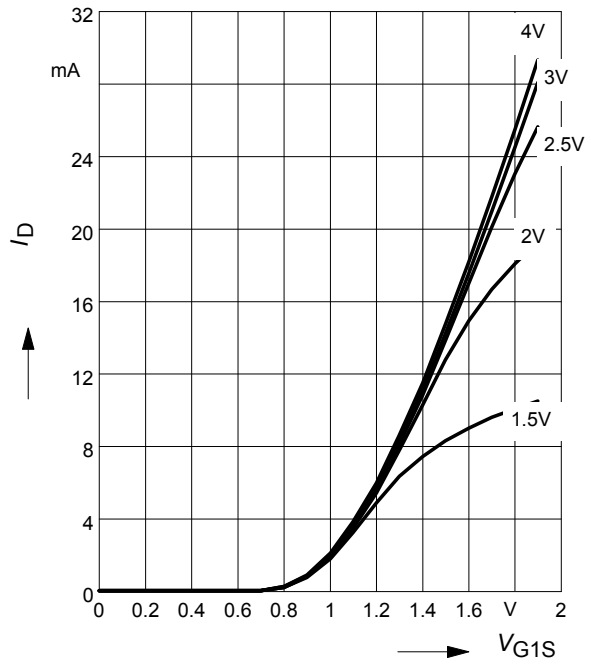

Drain current $I_D = f(V_{GG})$, amp. B
V_{DS} = 5V, V_{G2S} = 4V, R_{G1} = 100kΩ
(connected to V_{GG}, V_{GG}=gate1 supply voltage)

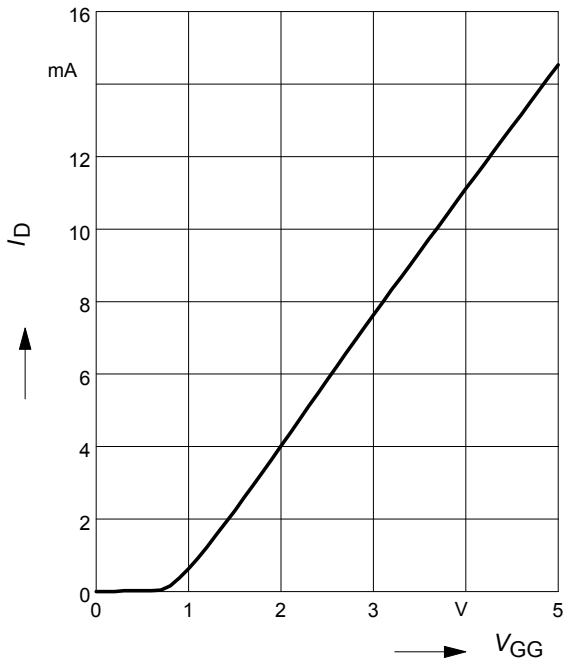

Drain current $I_D = f(V_{GG})$, amp. B
V_{DS} = 5V, V_{G2S} = 4V
(connected to V_{GG}, V_{GG}=gate1 supply voltage)

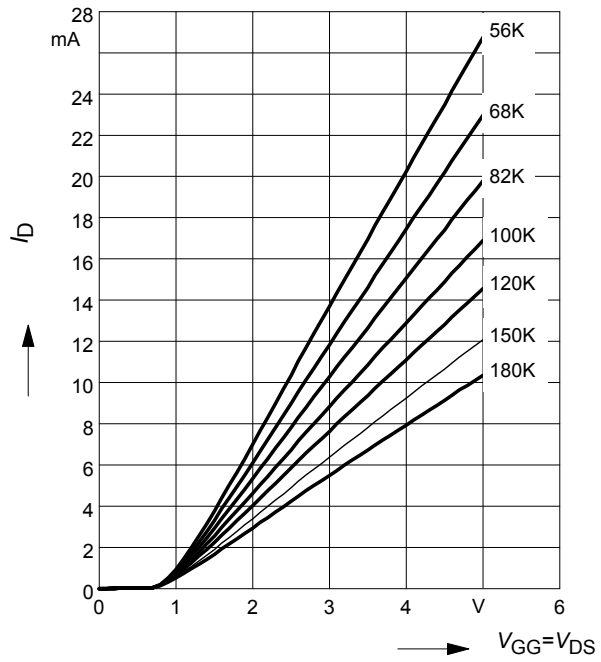

Drain current of FET A and FET B
as function of Gate 1 FET B

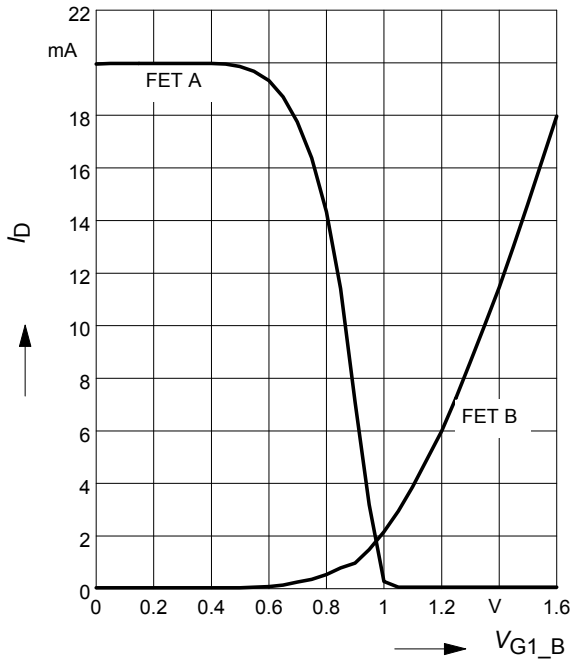

Downloaded from Elcodis.com electronic components distributor

AGC characteristic $AGC = f(V_{G2S})$
f= 45 MHz, amp. A

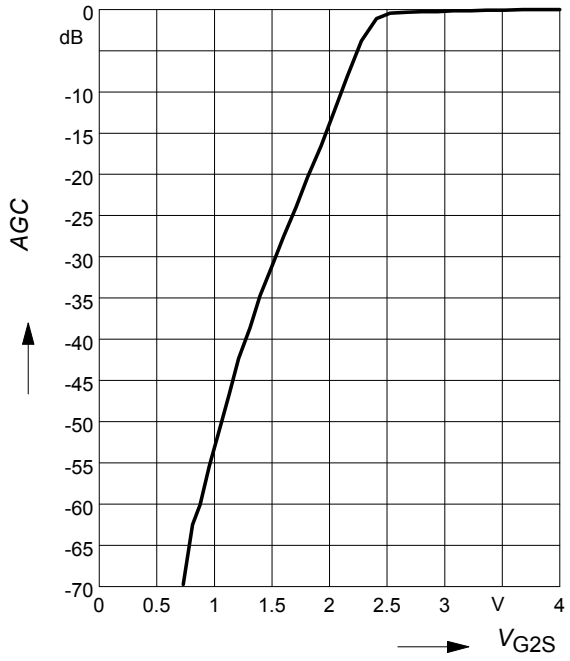

AGC characteristic $AGC = f(V_{G2S})$
f= 45 MHz, amp. B

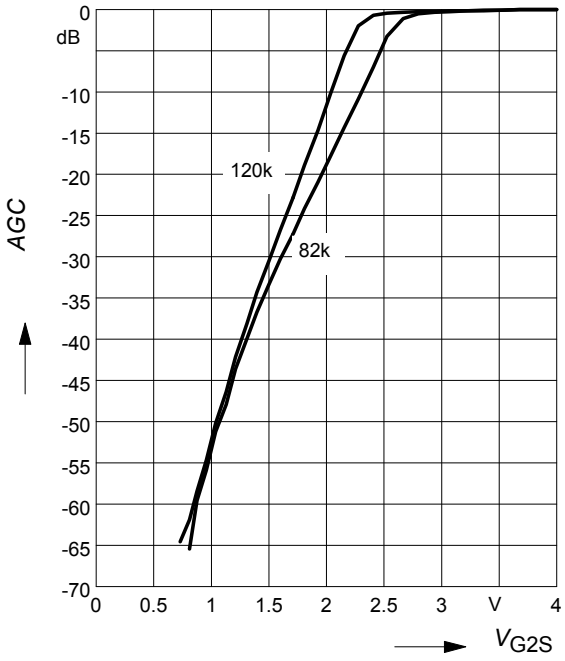

AGC characteristic $AGC = f(V_{G2S})$
f= 800MHz, amp. A

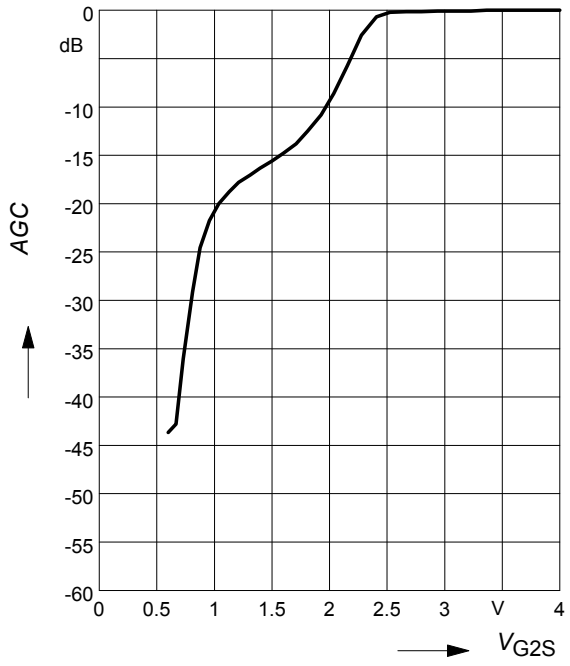

AGC characteristic $AGC = f(V_{G2S})$
f= 800 MHz, amp. B

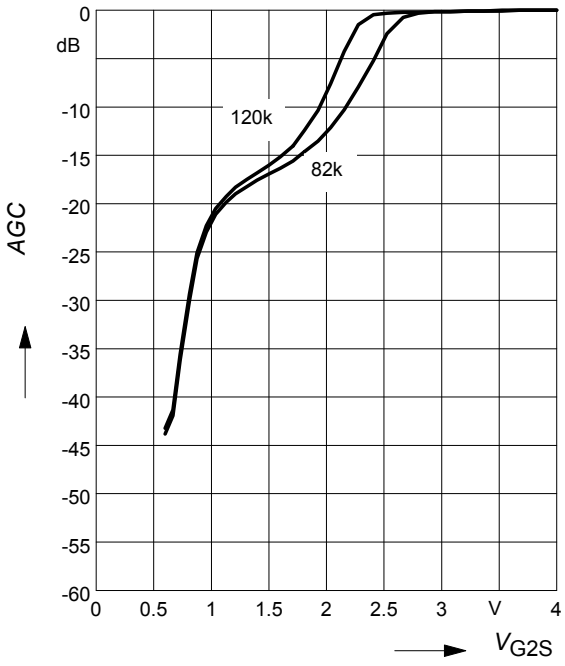

Downloaded from Elcodis.com electronic components distributor

Crossmodulation V_{unw} = (*AGC*)
V_{DS} = 5 V, R_{g1} = 120 kΩ
amp.A

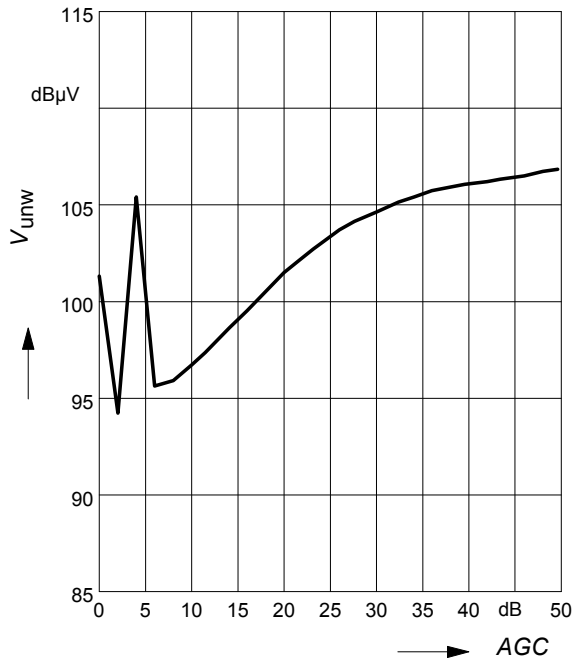

Crossmodulation V_{unw} = (*AGC*)
V_{DS} = 5 V, R_{g1} = 56 kΩ
amp.B

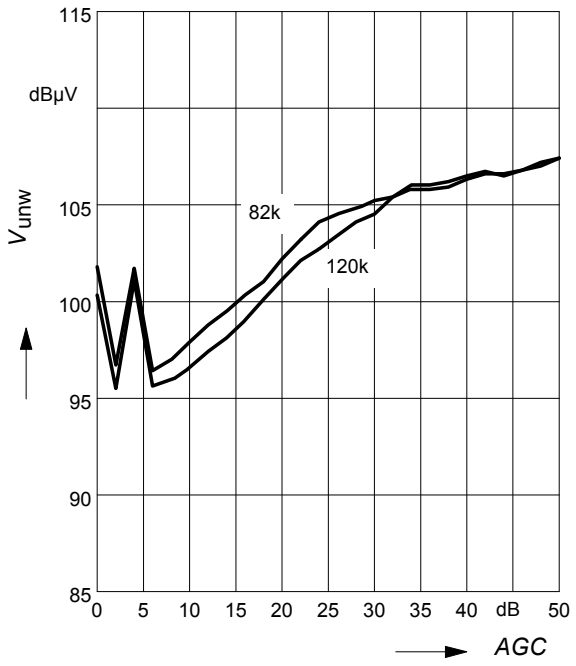

Downloaded from Elcodis.com electronic components distributor

Crossmodulation test circuit

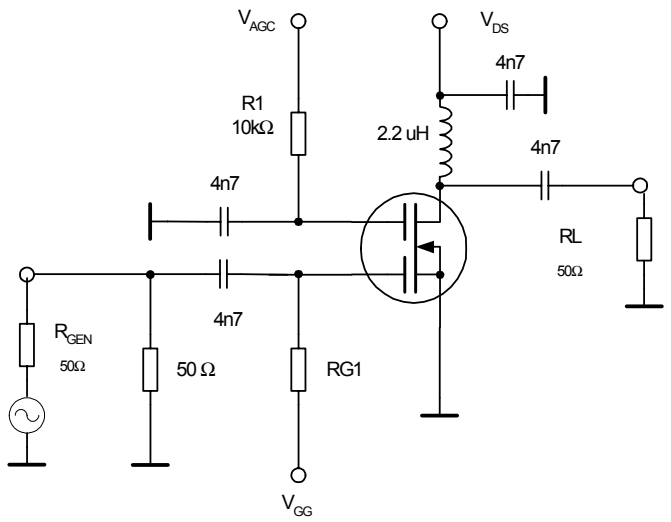

Semibiased

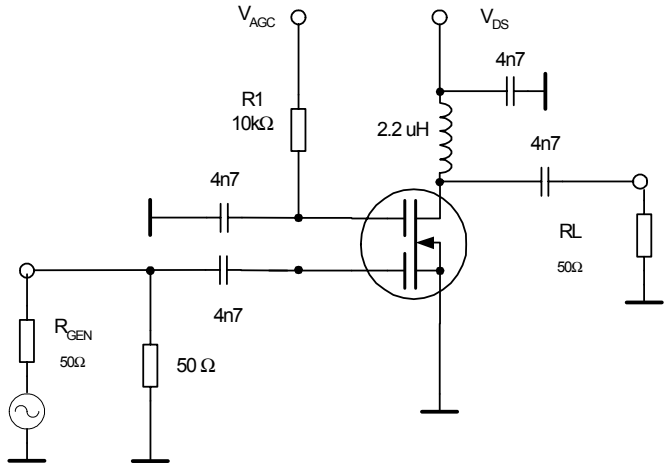

fullbiased

Downloaded from Elcodis.com electronic components distributor

Package Outline

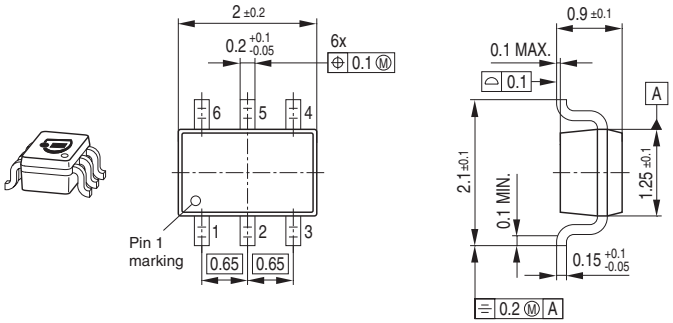

Foot Print



Marking Layout (Example)

Small variations in positioning of
Date code, Type code and Manufacture are possible.

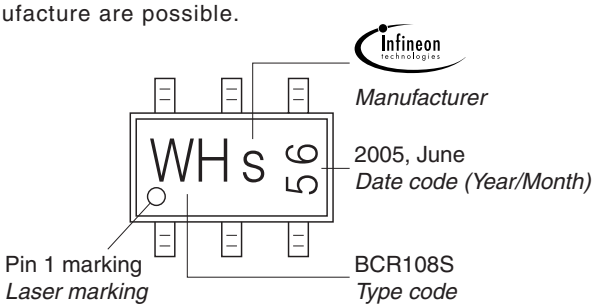

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

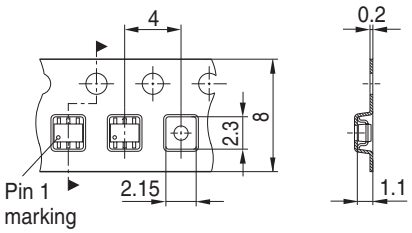

Downloaded from Elcodis.com electronic components distributor

Edition 2006-02-01
Published by
Infineon Technologies AG
81726 München, Germany
© Infineon Technologies AG 2007.
All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.
Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.
Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Downloaded from Elcodis.com electronic components distributor