

LOC	DIST	REVISIONS					
AD	25	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REV PER EC OU1B-0181-00	26 SEP 00	BC	CR
			C	REV PER EC OU1B-0063-01	23 FEB 01	BC	CR


1. SUITABLE FOR MALE TYPE M CONNECTORS.



RETAINING RING.



GOLD PLATE 0.000762 [.000030] MIN THICK IN ZONE 1, TIN-LEAD 0.00254 [.000100] MIN THICK IN ZONE 2. NICKLE UNDERPLATE 0.00127 [.000050] MIN THICK ALL OVER.

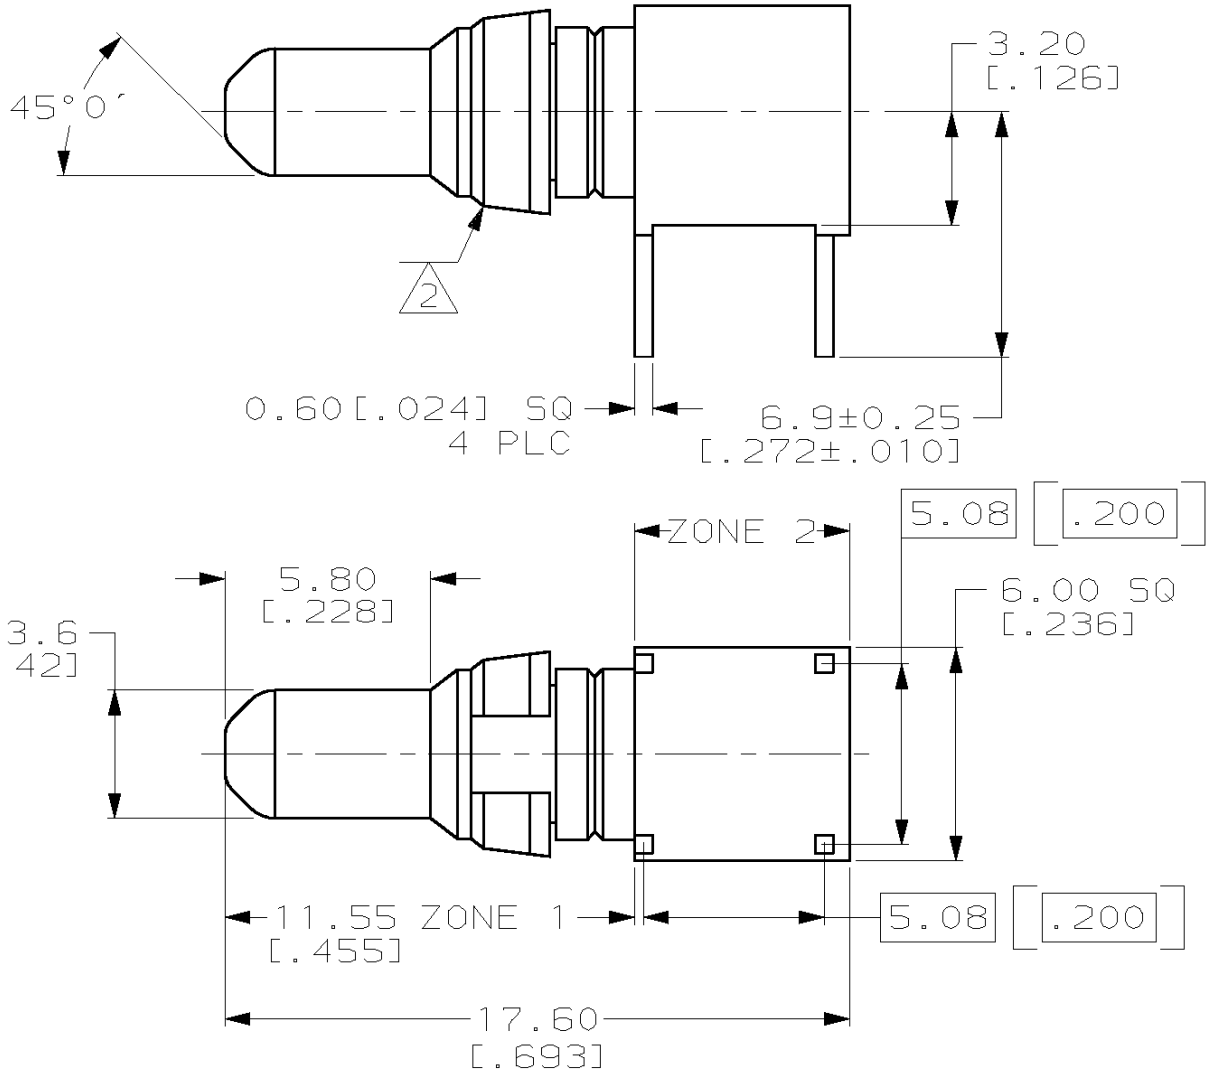

CONTACT; BRASS

RETAINING RING; BERYLLIUM COPPER

148354-1

FINISH

MATERIAL


PART NUMBER

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.13 [.005]
3 PLC	±-
4 PLC	±-
ANGLES	±1°0'



DWN 1/21/97

L. BRINER

CHK 1/21/97

C. RICHARD

APVD 1/21/97

C. RICHARD

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

MATERIAL

-

FINISH

-



AMP Incorporated
Harrisburg, PA 17105-3608

NAME

POWER CONTACT, MALE 90°,
4 SOLDER POSTS, (25 AMP)

SIZE

CAGE CODE

DRAWING NO

A4 00779 C-148354

CUSTOMER DRAWING

SCALE

5:1

SHEET

1 OF 1

REV C

19

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY AMP INCORPORATED.

© COPYRIGHT 19