
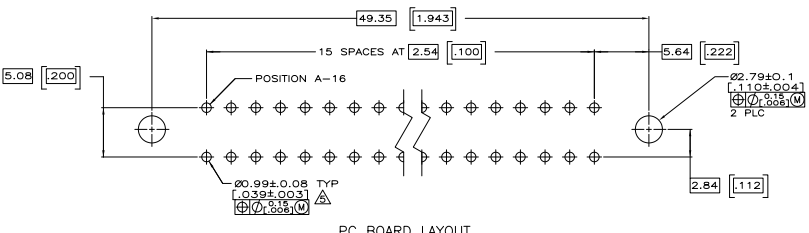

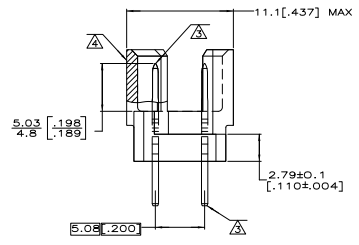
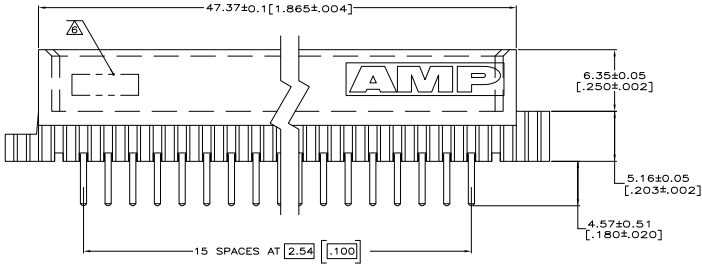


THIS DRAWING IS UNPUBLISHED. REPRODUCTION FOR IDENTIFICATION PURPOSES ONLY. ALL RIGHTS RESERVED.

| REV | DATE | DESCRIPTION | BY | CHK | APP |
|-------|------|---------------------------|---------|-----|-----|
| AD 25 | | | | | |
| 01 | | REVISED FOR ECO-07-012819 | 28JAN07 | DH | DB |

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA.
- △ TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

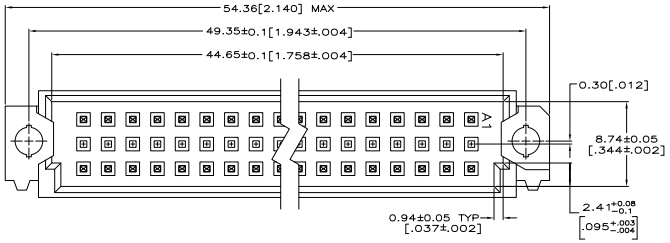

| 1-16 | X | - | X | 32 | 5650936-5 |
|------------------|---|---|---|-------------------------|------------------|
| POSITIONS LOADED | C | B | A | NO. OF LOADED POSITIONS | ASSY PART NUMBER |

| THIS DRAWING IS A CONTROLLED DOCUMENT. | | REV | DATE | DESCRIPTION | BY | CHK | APP |
|--|-------|---|------|-------------|-----|-----|-----|
| REV | DATE | DESCRIPTION | BY | CHK | APP | | |
| 1 | | ASSEMBLY, PIN, EUROCARD, TYPE 1/2R, A and C, 32/48 POSITION, 4.57(180) SOLIDER POST | | | | | |
| DATE | 00779 | 06650936 | | | | | |
| CUSTOMER DRAWING | | | | | | | |