
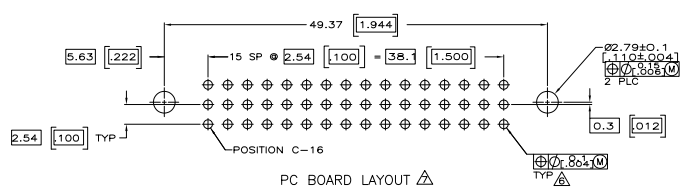


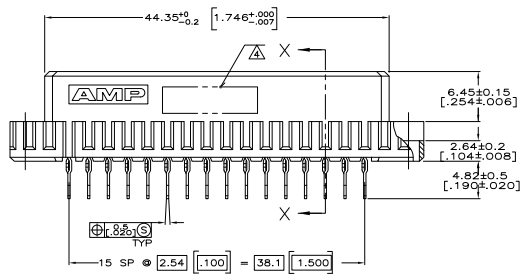


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	25	REVISED PER EDD-11-004835	11MM11	RK	HMR

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA.
0.00127[.000050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON TAILS.
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- △ POINT OF MEASUREMENT FOR GOLD.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MIN THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE Ø.1514[.02] Ø.0453±.001 DRILLED HOLE WITH 0.02-0.07[.001-.003] COPPER AND 0.008[.0003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING: Ø0.94-1.09[.037-.043].
- △ CENTER ROW OF PLATED THRU HOLES NOT REQUIRED FOR THIS CONNECTOR LOAD PATTERN.
- △ CONTACT FINISH: DIN 41612 CLASS 3 IN CONTACT AREA.
0.00127[.000050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON TAILS.

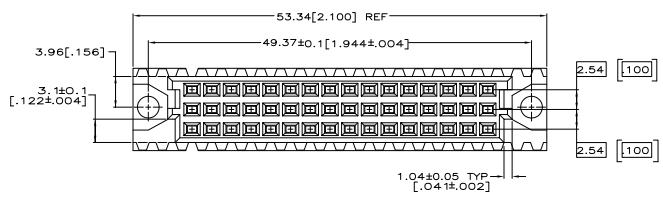

OBSOLETE	1 THRU 16	X	-	X	32	535068-9
	1 THRU 16	X	-	X	32	535068-5
	1 THRU 16	X	-	X	32	535068-4

NOTES	POSITIONS LOADED	C	B	A	NO. OF ROWS LOADED	POSITION	ASSY PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.							
DESIGNER		BRAND		DATE		TE Connectivity	
PROJECT FILE		PROJECT NAME		ASSEMBLY, RECEPTACLE, EUROCARD, TOOLLESS PRESSFIT, 48 POSITION		REWORKED TO	
DATE		DATE		DRAWING NO.		REVISED TO	
A1		00779		G=535068		REVISED TO	
CUSTOMER DRAWING		DATE		REVISED TO		REVISED TO	