THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			01	REVISED PER ECO-07-012819	28JUN07	DH	DB

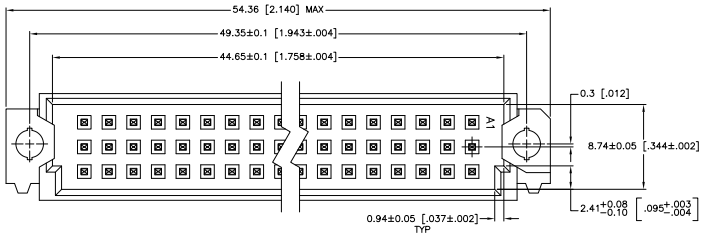

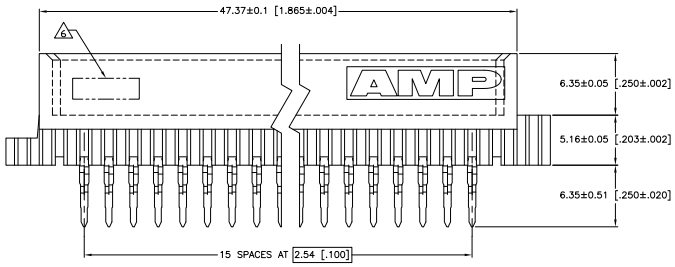

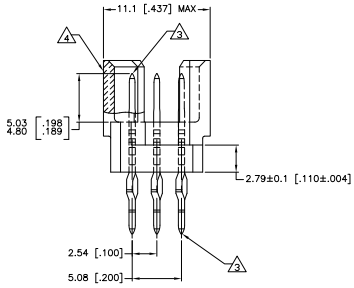

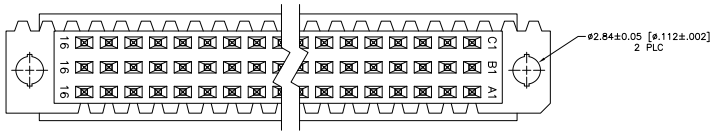

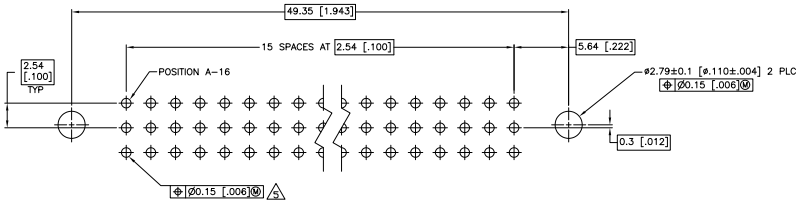

PC BOARD LAYOUT

1. HOUSING MATERIAL: GLASS-FILLED POLYMER.
2. POST MATERIAL: COPPER ALLOY.
3. POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
4. MARKING ON THIS SIDE.
5. ACTION PIN POSTS REQUIRE 2.36 [.093] MIN THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE ø1.151 [.0453] PLATED THROUGH WITH 0.02-0.08 [.001-.003] COPPER AND 0.008 [.0003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, ø0.94-1.09 [.037-.043].
6. PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.

1-16	X	X	X	48	5650918-5
POSITIONS LOADED	C	B	A	NO OF LOADED POSITIONS	ASSY PART NUMBER
	ROWS LOADED				

THIS DRAWING IS A CONTROLLED DOCUMENT.

TEM	J. POLIGNONE	CSM/DS
CHK	A. SHARPE	CSM/DS
APVD	A. SHARPE	CSM/DS
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

Tyco Electronics Corporation, Harrisburg, Pa 17105-3608

NAME: ASSEMBLY, PIN, EUROCARD, TYPE 1/2R, 48 POSITION, 6.35[.250] PRESS-FIT POSTS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5650918	—

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV 01

DIMENSIONS: mm [INCHES] — TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± –, 1 PLC ± –, 2 PLC ± 0.13 [.005], 3 PLC ± –, 4 PLC ± –, ANGLES ± –

MATERIAL 1 2 — FINISH 3

AMP 4805 REV 31MAR2000

28JUN2007 US077239

Downloaded from Elcodis.com electronic components distributor