
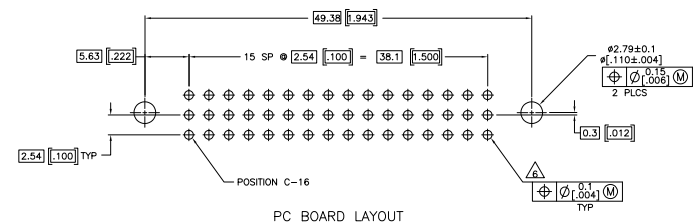


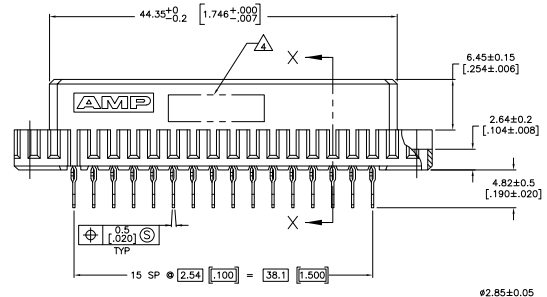


REV	DATE	DESCRIPTION	BY	CHK
AD 25				
P		REVISED FOR EDN 0512-027-05	18M/T/06	JDF/AMS

- △ HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- △ CONTACT MATERIAL: PHOSPHOR BRONZE.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN ON POSTS.
- △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- △ POINT OF MEASUREMENT FOR GOLD.
- △ ACTION PIN POSTS REQUIRE 1.57[.062] MIN THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE 28.15±0.02[.045±.001] DRILLED HOLE WITH 0.02-0.07[.001-.003] COPPER AND 0.008[.0003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, 20.94-1.09[.037-.043].
- △ CONTACT FINISH: 0.00127[.000050] GOLD IN CONTACT AREA. 0.00127[.000050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON TAILS.
- △ CONTACT FINISH: DIN 41612 CLASS 3 IN CONTACT AREA. TIN-LEAD ON POSTS.
- △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN-LEAD ON POSTS.

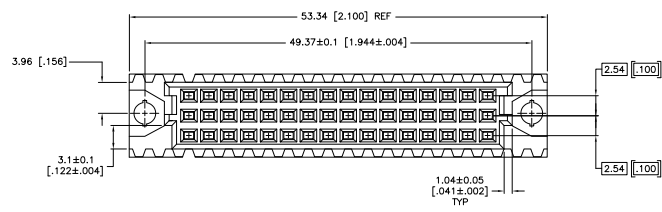

SUPERSEDED BY:	THRU	POSITIONS LOADED	ASSY PART NUMBER
535034-5	1 THRU 16	X X X	48 7-535034-5
OBSOLETE	1 THRU 16	X X X	48 535034-9
	1 THRU 16	X X X	48 535034-5
	1 THRU 16	X X X	48 535034-4
OBSOLETE	1 THRU 16	X X X	48 535034-1

NOTES: POSITIONS LOADED C B A 16, 25, 35 POSITION

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 12/19/87. DRAWN BY: JDF. CHECKED BY: AMS. DESIGNED BY: JDF. APPROVED BY: AMS. TITLE: ASSEMBLY, RECEPTACLE, EUROCARD, TOOLLESS PRESSFIT, 48 POSITION. PART NUMBER: 535034. CUSTOMER DRAWING: 100779. SIZE: 4.1. SHEET: 1 OF 1.