

Power analyzers and Energy Meters

Power Analyzer

Type WM14-96



- Optional RS422/485 serial port
- Alarms (visual only) V_{LN} , An

- Class 2 (active energy)
- Class 3 (reactive energy)
- Accuracy ± 0.5 F.S. (current/voltage)
- Power analyzer
- Display of instantaneous variables: 3x3 digit
- Display of energies: 8+1 digit
- System variables and phase measurements: W, W_{dmd} , var, VA, VA_{dmd} , PF, V, A, An, A_{dmd} , Hz
- A_{max} , $A_{dmd max}$, $W_{dmd max}$ indication
- Energy measurements: kWh and kvarh
- Hour counter (5+2 DGT)
- TRMS meas. of distorted sine waves (voltages/currents)
- Power supply: 24V, 48V, 115V, 230V 50-60Hz; 18 to 60VDC
- Protection degree (front): IP65
- Front dimensions: 96x96mm

Product Description

3-phase power analyzer with built-in programming keypad. Particularly recommended for displaying the main electrical variables.

Housing for panel mounting, (front) protection degree IP65 and optional RS485 serial port.

How to order

WM14-96 AV5 3 D X



Type Selection

Range codes	System	Power supply	Options
AV5: 400/660V _{L-L} /5(6)AAC VL-N: 185 V to 460 V VL-L: 320 V to 800 V AV6: 100/208V _{L-L} /5(6)AAC VL-N: 45 V to 145 V VL-L: 78 V to 250 V Phase current: 0.03A to 6A Neutral current: 0.09 to 6A	3 : 1-2-3-phase, balanced/unbalanced load, with or without neutral	A: 24VAC -15+10%, 50-60Hz B: 48VAC -15+10%, 50-60Hz C: 115VAC -15+10%, 50-60Hz D: 230VAC -15+10%, 50-60Hz 3: 18 to 60VDC	X: None S: RS485 port

Input specifications

Rated inputs Current Voltage	3 (shunt) 4	Sampling rate	1400 samples/s @ 50Hz 1700 samples/s @ 60Hz
Accuracy (display, RS485) (@25°C $\pm 5^\circ\text{C}$, R.H. $\leq 60\%$)	with CT=1 and VT=1 AV5: 1150W-VA-var, FS:230VLN, 400VLL; AV6: 285W-VA-var, FS:57VLN, 100VLL	Display refresh time	700ms
Current	0.25 to 6A: $\pm 0.5\%$ FS +1DGT) 0.03A to 0.25A: ± 7 DGT	Display	Type LED, 14mm 3x3 DGT Read-out for instant. var. 3+3+3 DGT (Max indication: 999 999 99.9) Read-out for energies 1+3+3 DGT (Max. indication: 9 999 9.99)
Neutral current	0.25 to 6A: $\pm 1.5\%$ FS +1DGT) 0.09A to 0.25A: ± 7 DGT	Measurements	Current, voltage, power, power factor, frequency, energy. TRMS measurement of distorted waves. Direct < 3; max 10A peak
Phase-phase voltage Phase-neutral voltage Active and Apparent power,	$\pm 1.5\%$ FS +1 DGT) $\pm 0.5\%$ FS + 1 DGT) 0.25 to 6A: $\pm 1\%$ FS +1DGT); 0.03A to 0.25A: $\pm 1\%$ FS +5DGT)	Measuring method	TRMS measurement of distorted waves.
Reactive power	0.25 to 6A: $\pm 2\%$ FS +1DGT); 0.03A to 0.25A: $\pm 2\%$ FS +5DGT)	Coupling type Crest factor	Direct < 3; max 10A peak
Active energy Reactive energy Frequency	Class 2 (I start up: 30mA) Class 3 (I start up: 30mA) $\pm 0.1\%$ Hz (48 to 62Hz)	Input impedance 400/660V _{L-L} (AV5) 100/208V _{L-L} (AV6) Current	1 M Ω $\pm 5\%$ 453 K Ω $\pm 5\%$ $\leq 0.02\Omega$
Additional errors Humidity	$\leq 0.3\%$ FS, 60% to 90% RH	Frequency	48 to 62 Hz
Temperature drift	≤ 200 ppm/ $^\circ\text{C}$	Overload protection Continuous voltage/current For 500ms: voltage/current	1.2 F.S. 2 Un/36A

Specifications are subject to change without notice WM14-96DS0904



RS485 Serial Port Specifications

RS422/RS485 (on request)			
Type	Multidrop bidirectional (static and dynamic variables)	Data (bidirectional) Dynamic (reading only)	System, phase variables and energies All configuration parameters 1 start bit, 8 data bit, no parity, 1 stop bit. 9600 bit/s
Connections	2 or 4 wires, max. distance 1200m, termination directly on the instrument	Static (writing only) Data format	
Addresses Protocol	1 to 255, key-pad selectable MODBUS/JBUS	Baud-rate	

Software functions

Password	Numeric code of max. 3 digits; 2 protection levels of the programming data Password "0", no protection		Page 3: A L1, A L2, A L3 Page 4: A L1 dmd, A L2 dmd, A L3 dmd Page 5: An, An Alarm Page 6: W L1, W L2, W L3 Page 7: PF L1, PF L2, PF L3 Page 8: var L1, var L2, var L3 Page 9: VA L1, VA L2, VA L3 Page 10: VA Σ , W Σ , var Σ Page 11: VA dmd, W dmd, Hz Page 12: W dmd max Page 13: Wh Page 14: varh Page 15: VL-L Σ , PF Σ , VLN Alarm Page 16: A max Page 17: A dmd max Page 18: working hours
1st level	Protection level 1		
2nd level	Protection level 2		
System selection	3-phase with/without n, unbal. 3-phase balanced 3-phase ARON 2-phase Single phase		
Transformer ratio			
CT	1 to 999		
VT	1.0 to 99.9		
Filter			
Operating range	0 to 99.9% of the input electrical scale		
Filtering coefficient	1 to 16		
Filter action	Measurements, alarms, serial output (fundamental variables: V, A, W and their derived ones).	Alarms	
Displaying	Up to 3 variables per page Page 1: V L1, V L2, V L3 Page 2: V L12, V L23, V L31	Reset	Independent alarm (VL Σ , An) max: A dmd, W dmd all counters (Wh, varh, h)

Power Supply Specifications

Auxiliary power supply	230VAC -15 +10%, 50-60Hz 115VAC -15 +10%, 50-60Hz 48VAC -15 +10%, 50-60Hz	24VAC -15 +10%, 50-60Hz 18 to 60VDC
		Power consumption
		AC: 4.5 VA DC: 4W

General Specifications

Operating temperature	0° to +50°C (32° to 122°F) (RH < 90% non condensing)	measuring inputs and RS485. 4kVAC, 500VDC between power supply and RS485
Storage temperature	-10° to +60°C (14° to 140°F) (RH < 90% non condensing)	Dielectric strength
Installation category	Cat. III (IEC 60664, EN60664)	4kVAC (for 1 min)
Insulation (for 1 minute)	4kVAC, 500VDC between measuring inputs and power supply. 500VAC/DC between	EMC
		Emissions
		EN50084-1 (class A) residential environment, commerce and light industry

General Specifications (cont.)

Immunity	EN61000-6-2 (class A) industrial environment.	Material	ABS self-extinguishing: UL 94 V-0
Pulse voltage (1.2/50µs)	EN61000-4-5	Mounting	Panel
Safety standards	IEC60664, EN60664	Protection degree	Front: IP65 (standard) Connections: IP20
Approvals	CE, UL and CSA	Weight	Approx. 400 g (pack. incl.)
Connections 5(6) A Max cable cross sect. area	Screw-type 2.5 mm ²		
Housing Dimensions (WxHxD)	96 x 96 x 63 mm		


Display pages

Display variables in a 3-phase system with neutral

No	1 st variable	2 nd variable	3 rd variable	Notes
1	V L1	V L2	V L3	
2	V L12	V L23	V L31	Decimal point blinking on the right of the display
3	A L1	A L2	A L3	
4	A L1 dmd	A L2 dmd	A L3 dmd	dmd = demand (integration time selectable from 1 to 30 minutes)
5	An	AL.n		AL.n if neutral current alarm is active
6	W L1	W L2	W L3	Decimal point blinking on the right of the display if generated power
7	PF L1	PF L2	PF L3	
8	var L1	var L2	var L3	Decimal point blinking on the right of the display if generated power
9	VA L1	VA L2	VA L3	
10	VA system	W system	var system	
11	VA dmd (system)	W dmd (system)	Hz (system)	dmd = demand (integration time selectable from 1 to 30 minutes)
12		W dmd MAX		Maximum sys power demand
13	Wh (MSD)	Wh	Wh (LSD)	The total indication is given in max 3 groups of 3 digits.
14	varh (MSD)	varh	varh (LSD)	The total indication is given in max 3 groups of 3 digits.
15	V LL system	AL.U	PF system	AL.U= is activated only if one of VLN is not within the set limits.
16	A MAX			max. current among the three phases
17	A dmd max			max. dmd current among the three phases
18	h			hour counter

MSD: most significant digit

LSD: least significant digit

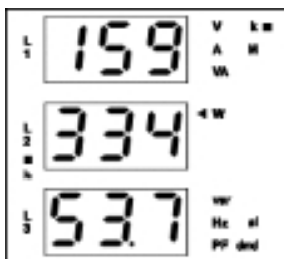


1) Example of kWh visualization:

This example is showing 15 933 453.7 kWh


2) Example of kvarh visualization:

This example is showing 3 553 944.9 kvarh

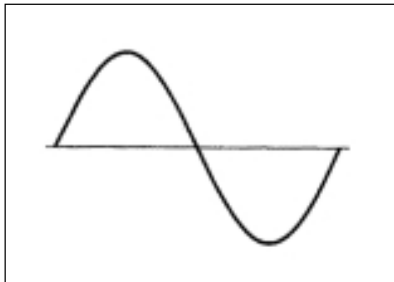


Waveform of the signals that can be measured
**Figure A****Sine wave, undistorted**

Fundamental content	100%
Harmonic content	0%
$A_{rms} =$	$1.1107 \cdot \bar{A} $

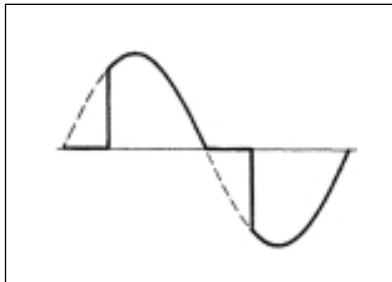**Figure B****Sine wave, indented**


Fundamental content	10...100%
Harmonic content	0...90%
Frequency spectrum:	3rd to 16th harmonic
Additional error:	<1% FS

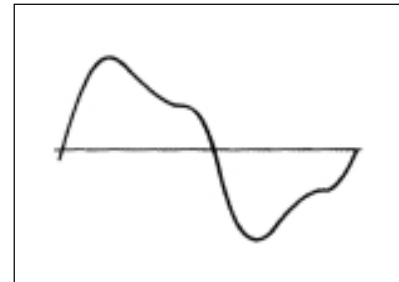**Figure C****Sine wave, distorted**


Fundamental content	70...90%
Harmonic content	10...30%
Frequency spectrum:	3rd to 16th harmonic
Additional error:	<0.5% FS

Accuracy

Wh, accuracy (RDG) depending on the current

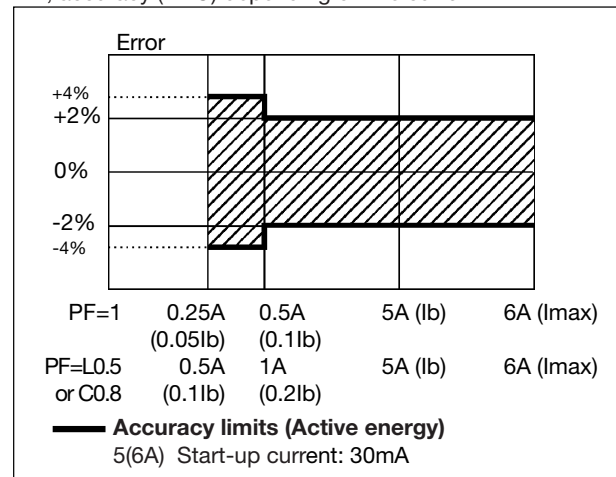

varh, accuracy (RDG) depending on the current

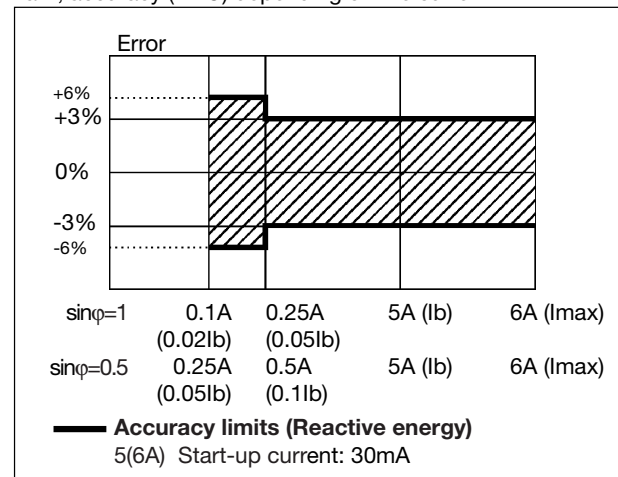

Used calculation formulas

Phase variables

Instantaneous effective voltage

$$V_{IN} = \sqrt{\frac{1}{n} \cdot \sum_1^n (V_{INi})^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_1^n (V_{INi}) \cdot (A_i)$$

Instantaneous power factor

$$\cos\phi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (A_i)^2}$$

Instantaneous apparent power

$$VA_1 = V_{IN} \cdot A_1$$

Instantaneous reactive power

$$VAR_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

System variables

Equivalent 3-phase voltage

$$V_\Sigma = \frac{V_1 + V_2 + V_3}{3} \cdot \sqrt{3}$$

3-phase reactive power

$$VAR_\Sigma = (VAR_1 + VAR_2 + VAR_3)$$

3-phase active power

$$W_\Sigma = W_1 + W_2 + W_3$$

3-phase apparent power

$$VA_\Sigma = \sqrt{W_\Sigma^2 + VAR_\Sigma^2}$$

3-phase power factor

$$\cos\phi_\Sigma = \frac{W_\Sigma}{VA_\Sigma}$$

Neutral current

$$A_n = \bar{A}_{L1} + \bar{A}_{L2} + \bar{A}_{L3}$$

Used calculation formulas (cont.)

$$kWh_i = \int_{t_1}^{t_2} P_i(t) dt \approx \Delta t \sum_{n_1}^{n_2} P_{n,i}$$

$$kVarh_i = \int_{t_1}^{t_2} Q_i(t) dt \approx \Delta t \sum_{n_1}^{n_2} Q_{n,i}$$

Energy metering

Where:

i = considered phase (L1, L2 or L3)

P = active power

Q = reactive power







t_1, t_2 = starting and ending time points of consumption recording

n = time unit

Δt = time interval between two successive power consumptions


n_1, n_2 = starting and ending discrete time points of consumption recording

Wiring diagrams

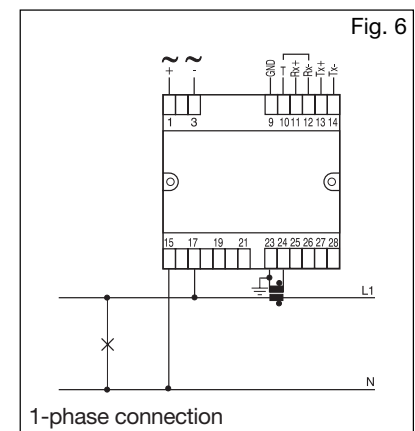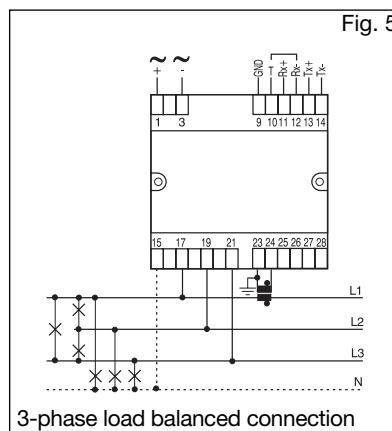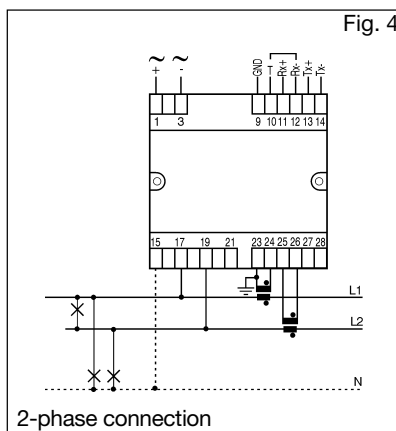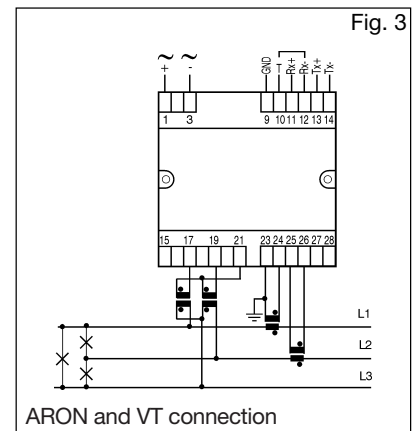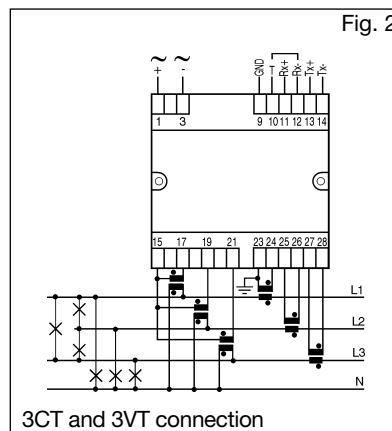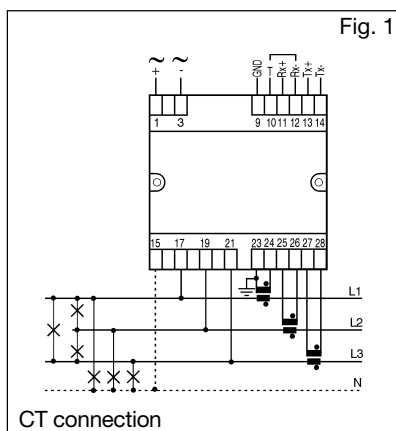


NOTE: the current inputs can be connected to the lines ONLY by means of current transformers. The direct connection is not allowed.

RS485 Serial connection

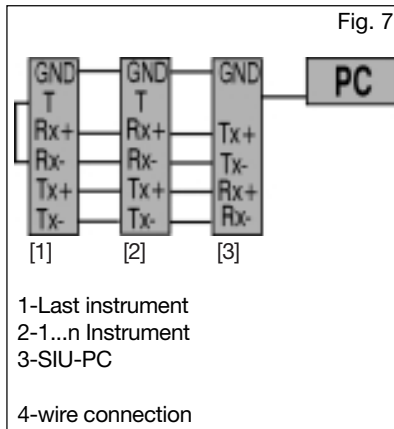

Front Panel Description

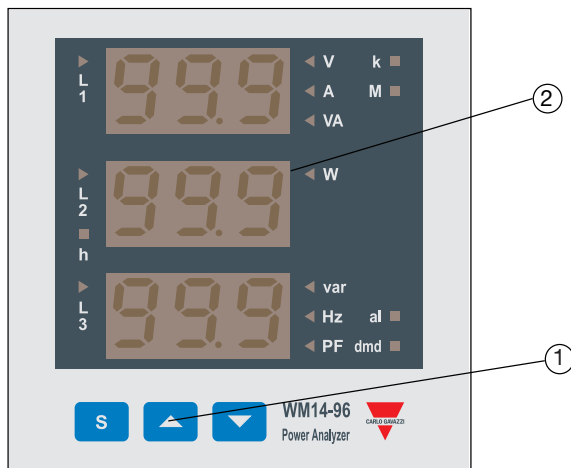

1. Key-pad

To program the configuration parameters and the display of the variables.



Key to enter programming and confirm selections;



Keys to:

- programme values;
- select functions;
- display measuring pages.

2. Display

LED-type with alphanumeric indications to:

- display configuration parameters;
- display all the measured variables.

Dimensions and Panel Cut-out

